


Level (100:3706 Hz) = 97.55 dB SPL/watt (8 ohms, @1.50 meters)

15CL76

MLSSA: Frequency Domain

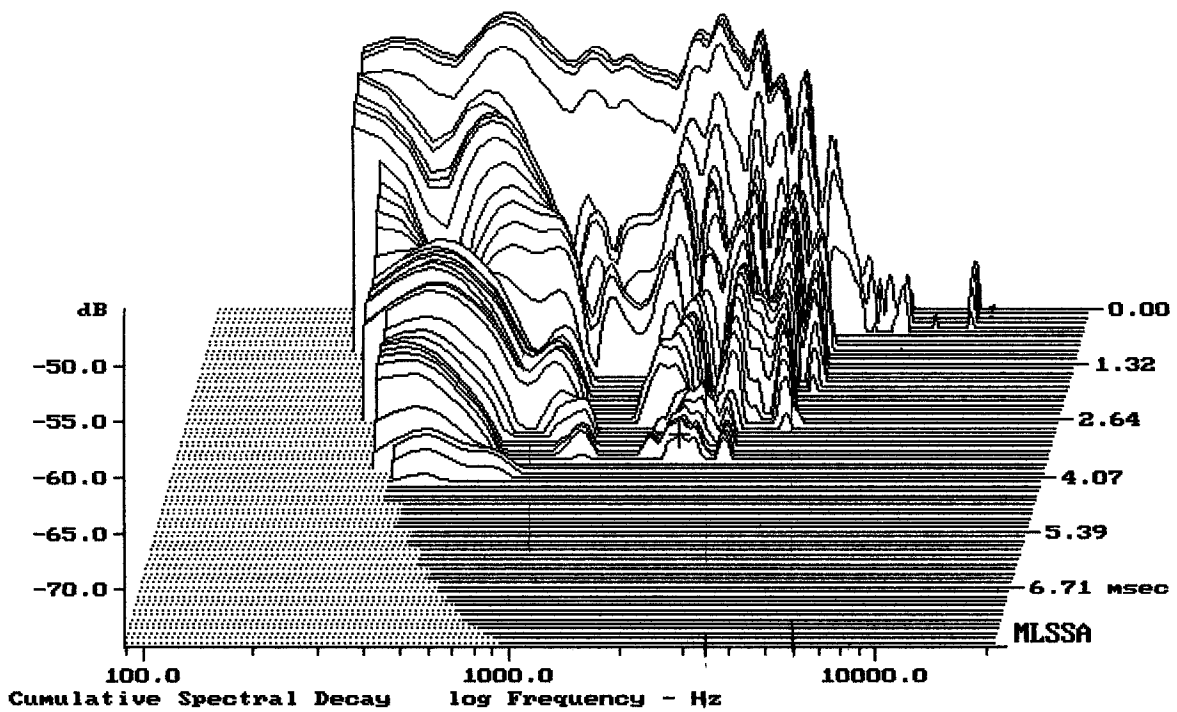

-72.74 dB, 2086 Hz (47), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	49.66	Hz
3	Re	5.14	Ohms[dc]
4	Res	67.05	Ohms
5	Qms	5.23	
6	Qes	0.40	
7	Qts	0.37	
8	L1	0.80	mH
9	L2	1.57	mH
10	R2	6.58	Ohms
11	RMSE-load	0.50	Ohms
12	Vas(Sd)	135.92	liters
13	Mms	82.47	grams
14	Cms	125	$\mu\text{M}/\text{Newton}$
15	B1	18.16	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.18	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.20 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.2% (-20% to -50% is recommended).

15CL76

MLSSA: Parameters

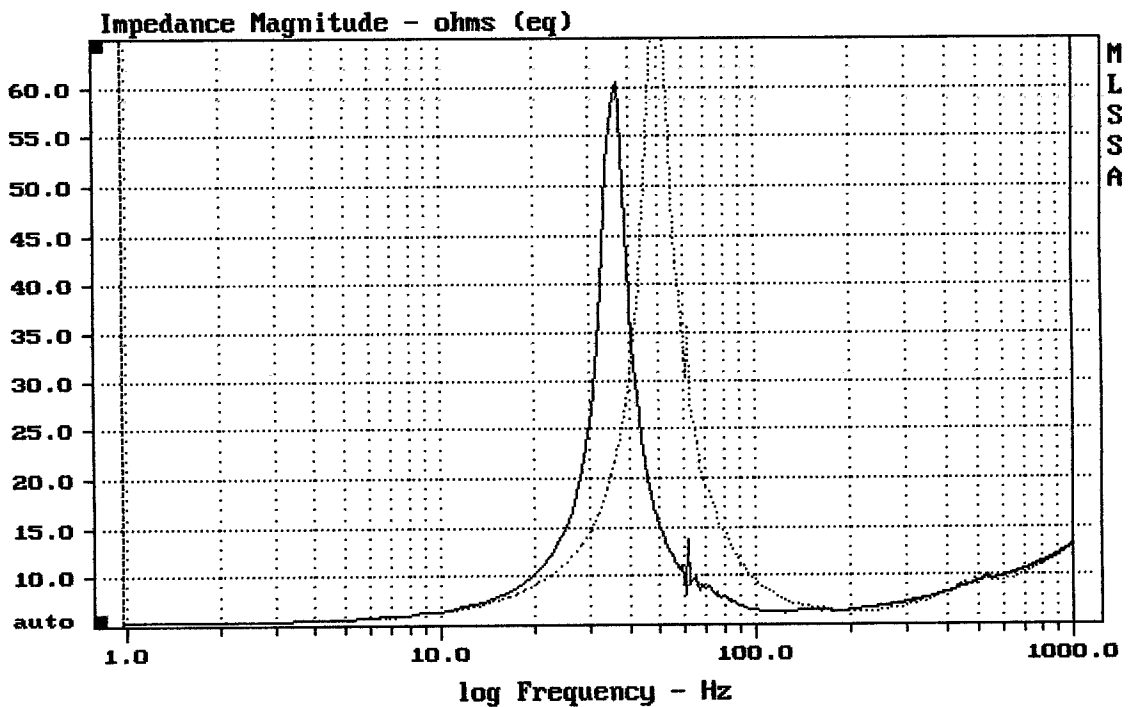

mean: 10.55, rms: 12.53, std: 6.749, max: 74.05, min: 5.38

MLSSA: Frequency Domain