


Level (100:1909 Hz) = 94.21 dB SPL/watt (4 ohms, @1.50 meters)

15NW100-4

MLSSA: Frequency Domain

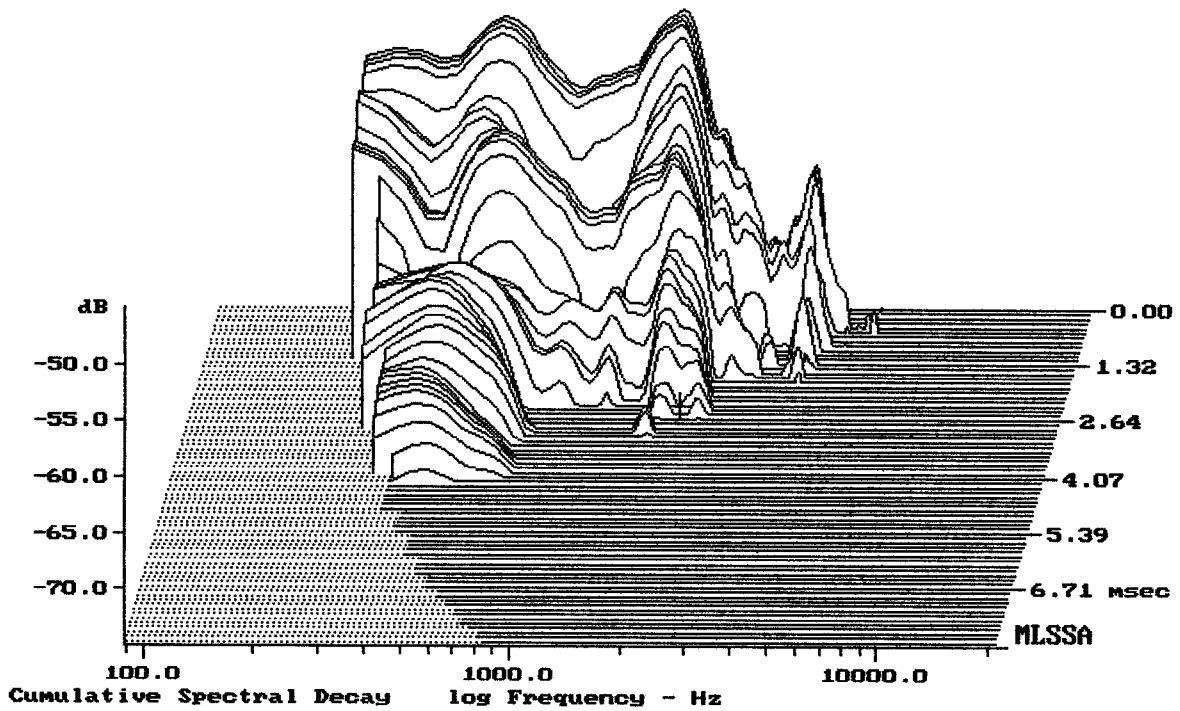

-74.69 dB, 1909 Hz (43), 2.420 msec (23)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	39.98	Hz
3	Re	3.68	Ohms[dc]
4	Res	63.20	Ohms
5	Qms	4.41	
6	Qes	0.26	
7	Qts	0.24	
8	L1	1.23	mH
9	L2	1.42	mH
10	R2	5.89	Ohms
11	RMSE-load	0.60	Ohms
12	Vas(Sd)	128.78	liters
13	Mms	134.29	grams
14	Cms	118	$\mu\text{M}/\text{Newton}$
15	B1	21.98	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.9% (-20% to -50% is recommended).

15NW100-4ohm

MLSSA: Parameters

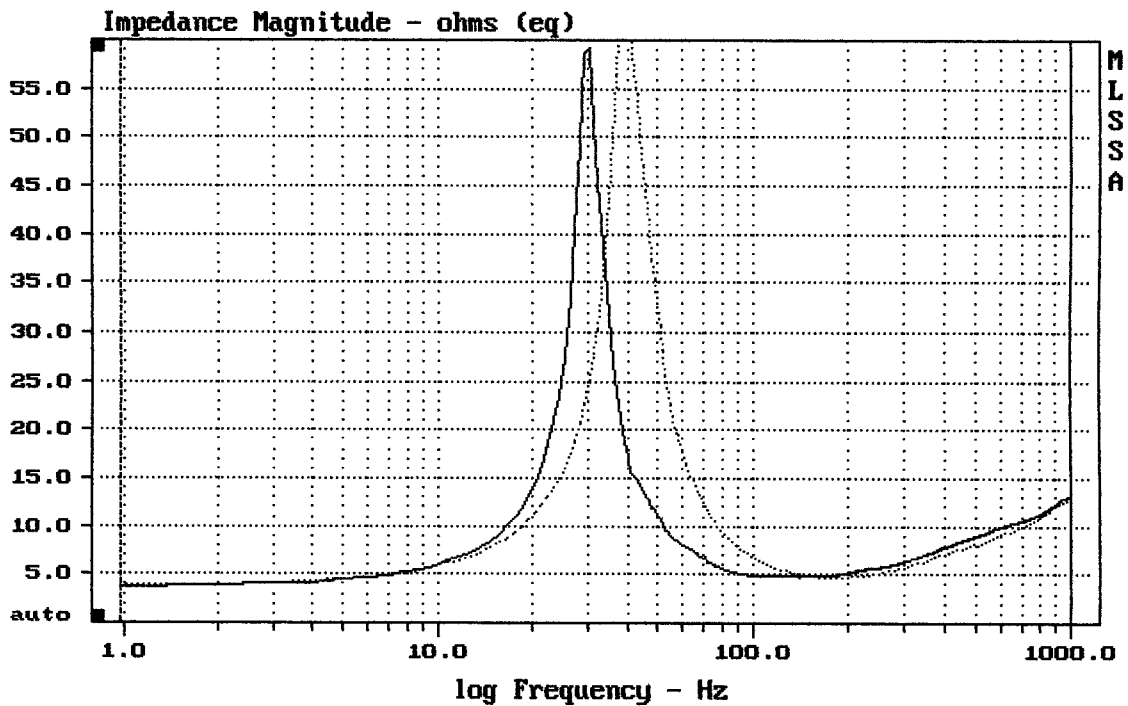

mean: 9.563, rms: 11.49, std: 6.375, max: 69.75, min: 3.818

MLSSA: Frequency Domain