


Level (100:2000 Hz) = 97.26 dB SPL/watt (4 ohms, @1.50 meters)

15NW76-4

MLSSA: Frequency Domain

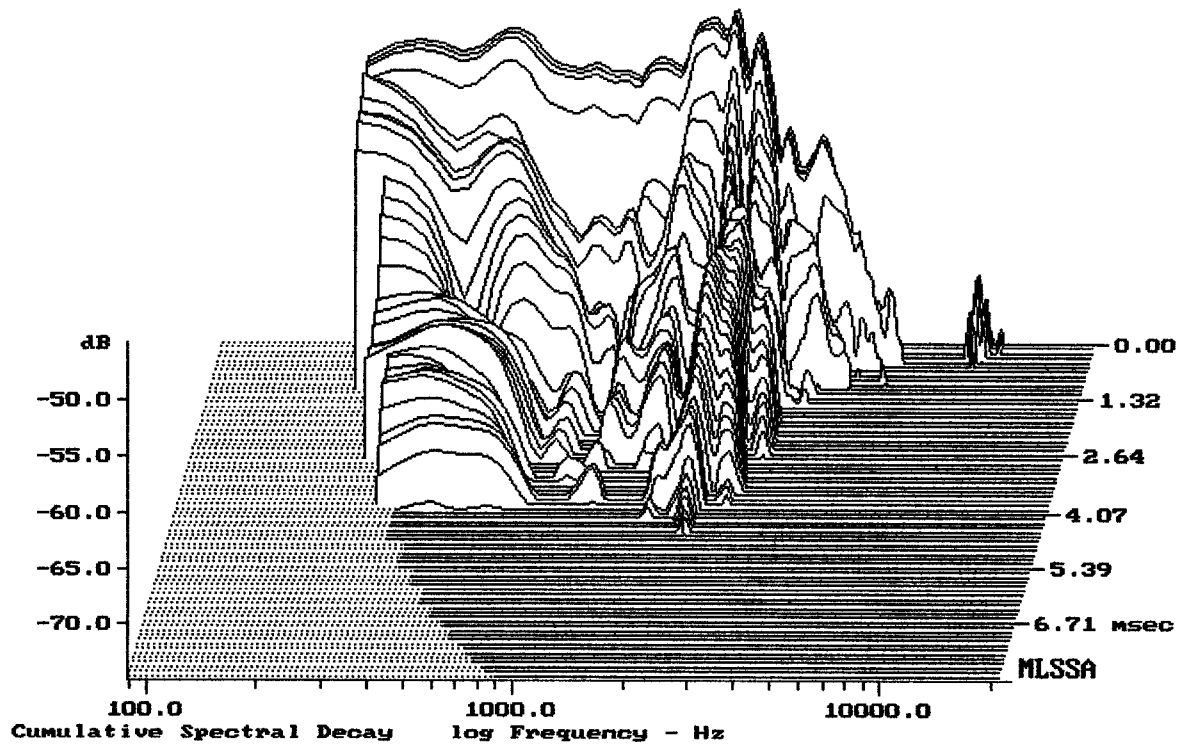

-73.83 dB, 2219 Hz (50), 4.510 msec (42)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	38.92	Hz
3	Re	3.11	Ohms[dc]
4	Res	105.74	Ohms
5	Qms	7.65	
6	Qes	0.22	
7	Qts	0.22	
8	L1	0.70	mH
9	L2	0.86	mH
10	R2	3.49	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	163.46	liters
13	Mms	111.61	grams
14	Cms	150	$\mu\text{M}/\text{Newton}$
15	B1	19.42	Tesla-M
16	SPLref(Sd)	98.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.7% (-20% to -50% is recommended).

15NW76-4ohm

MLSSA: Parameters

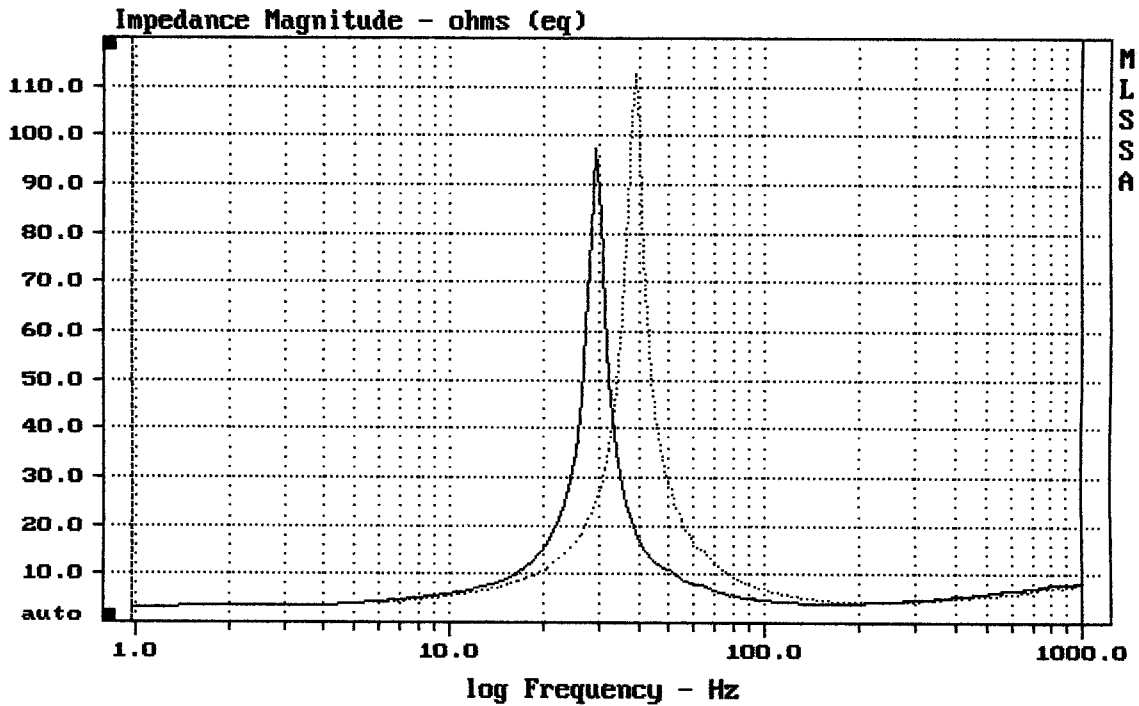

mean: 7.335, rms: 11.17, std: 8.418, max: 112.7, min: 3.206

MLSSA: Frequency Domain