


Level (100:1565 Hz) = 92.26 dB SPL/watt (8 ohms, @1.50 meters)

18DS115

MLSSA: Frequency Domain

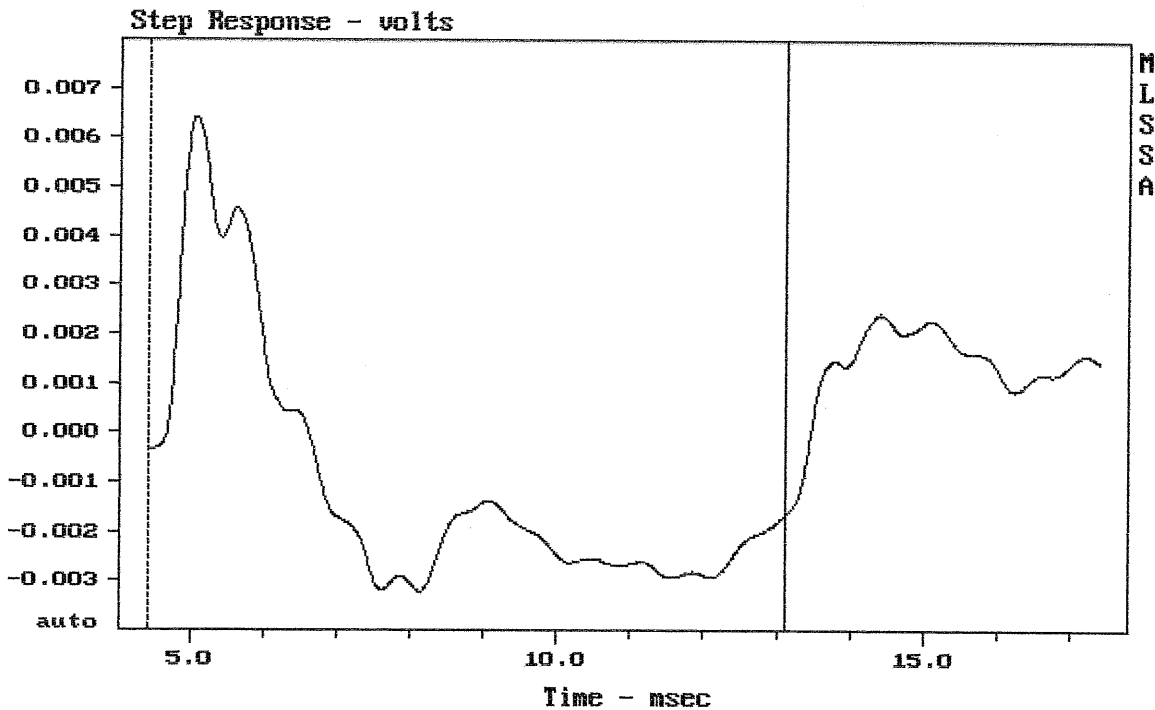

mean: -0.001068, rms: 0.002691, std: 0.00247, max: 0.00641, min: -0.003216

18DS115

MLSSA: Time Domain

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	1.32	Ohms	
2	Fs	42.00	Hz	
3	Re	5.10	Ohms[dc]	
4	Res	153.07	Ohms	
5	Qms	9.39		
6	Qes	0.31		
7	Qts	0.30		
8	L1	3.01	mH	
9	L2	3.70	mH	
10	R2	15.19	Ohms	
11	RMSE-load	1.24	Ohms	
12	Vas(Sd)	88.99	liters	
13	Mms	323.46	grams	
14	Cms	44	$\mu\text{M}/\text{Newton}$	
15	B1	37.30	Tesla-M	
16	SPLref(Sd)	95.1	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (210.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.1% (-20% to -50% is recommended).

18DS115

MLSSA: Parameters

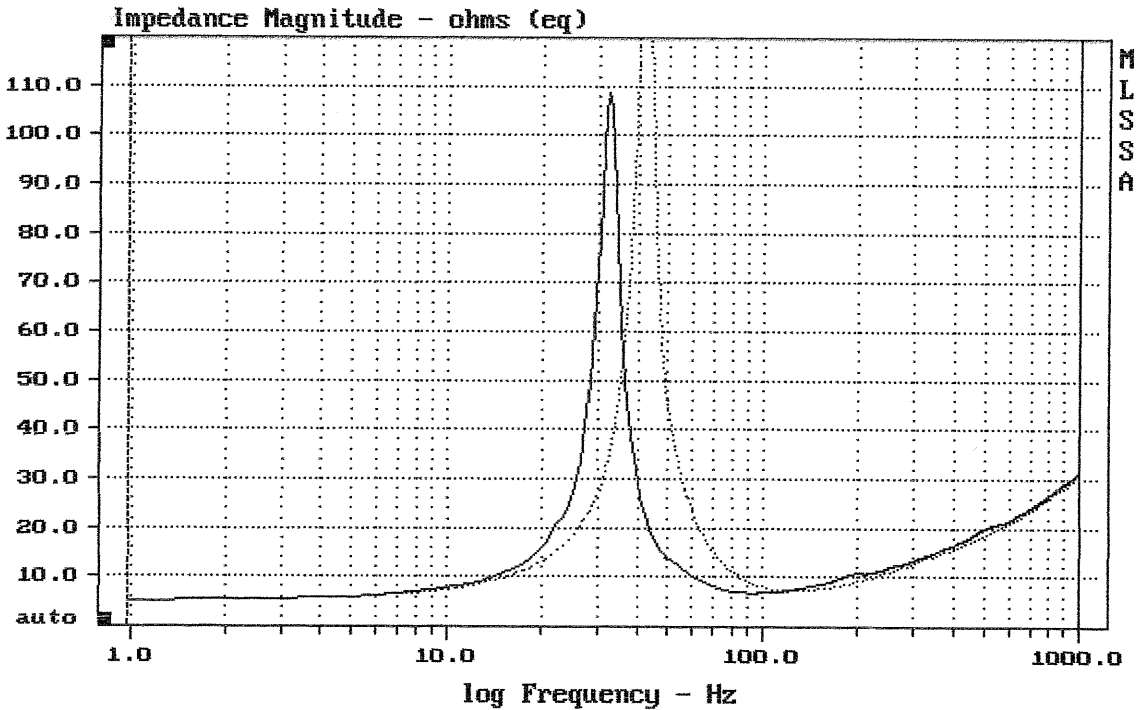

mean: 20.06, rms: 23.48, std: 12.2, max: 160, min: 5.212

MLSSA: Frequency Domain