

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon  
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.60	Ohms
2	Fs	32.46	Hz
3	Re	3.31	Ohms[dc]
4	Res	81.83	Ohms
5	Qms	10.30	
6	Qes	0.42	
7	Qts	0.40	
8	L1	1.07	mH
9	L2	1.26	mH
10	R2	5.85	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	268.67	liters
13	Mms	347.09	grams
14	Cms	69	$\mu$ M/Newton
15	B1	23.71	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (350.00 grams)

Area (Sd): 1661.90 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.0% (-20% to -50% is recommended).

21SW115


MLSSA: Parameters

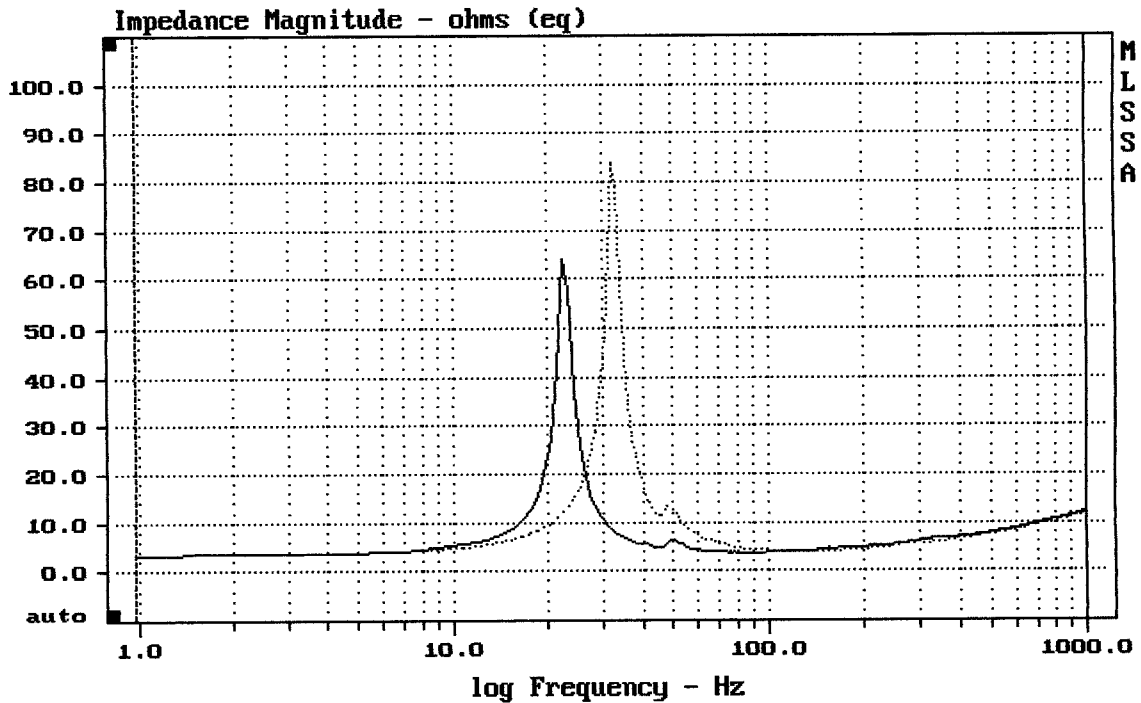

mean: 8.385, rms: 9.947, std: 5.35, max: 84.06, min: 3.364

DT10

MLSSA: Frequency Domain

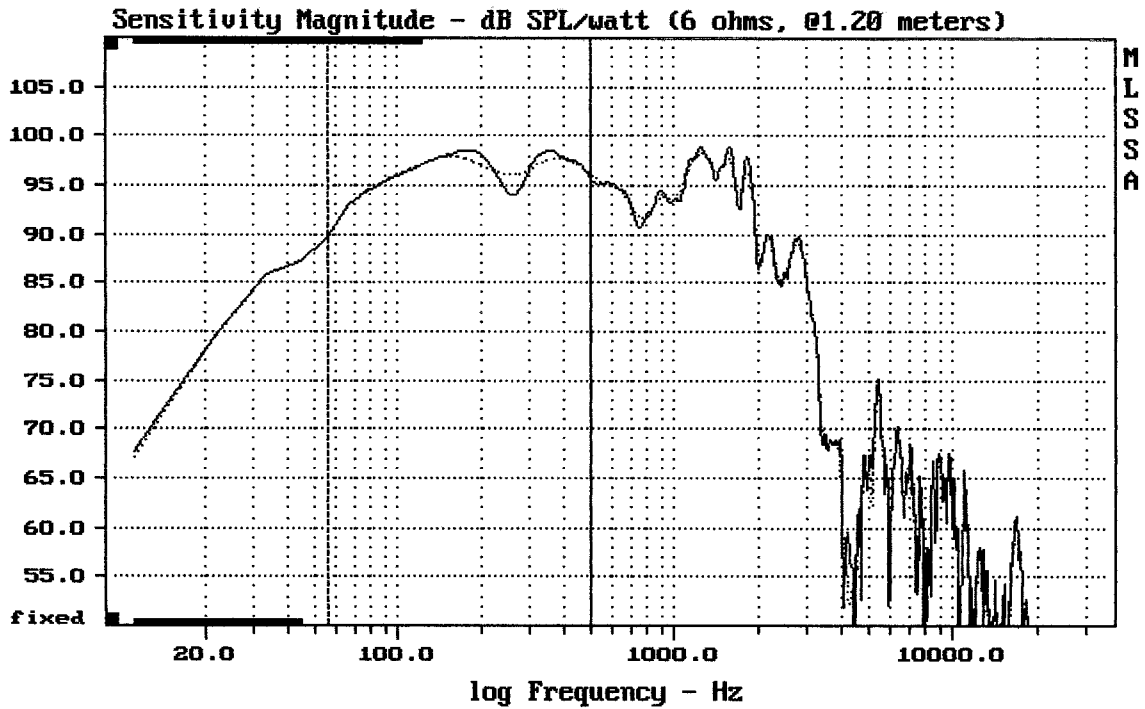



---

Level (55:499 Hz) = 96.34 dB SPL/watt (6 ohms, @1.20 meters)

---

Z1SW115-4

MLSSA: Frequency Domain

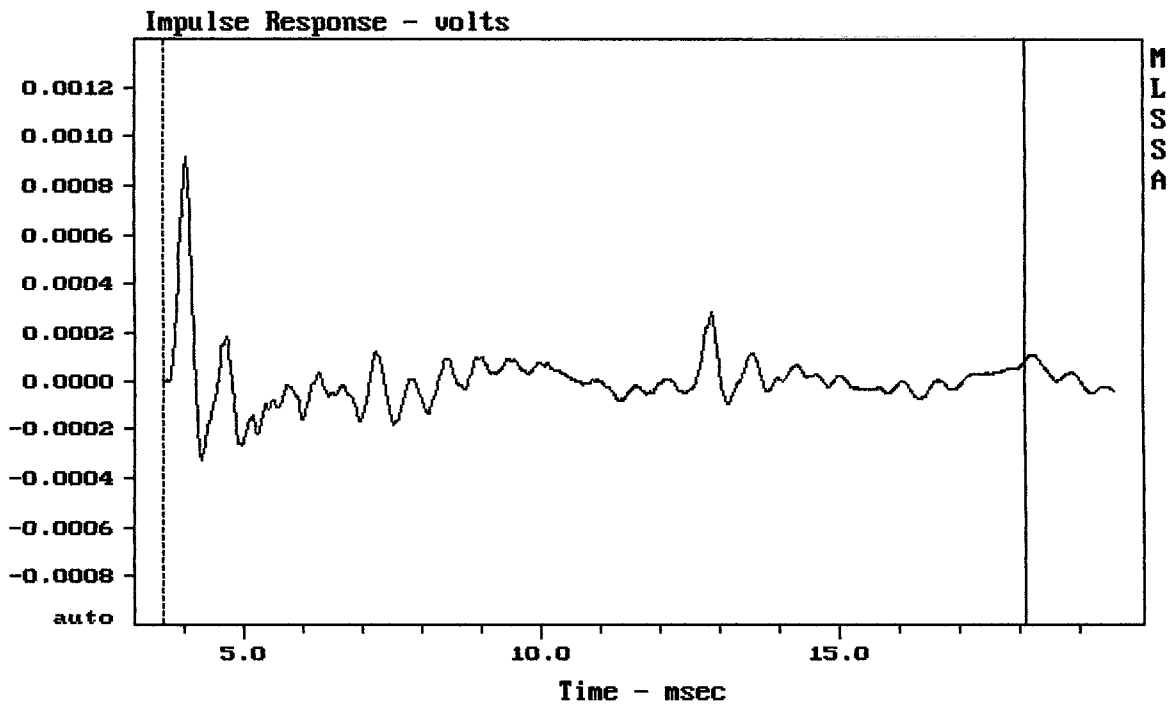


---

CURSOR: y = 9.04467e-005 x = 18.1060 (1646)

---

Z1SW115-4