


Level (1110:21950 Hz) = 110.56 dB SPL/watt (16 ohms, @1.00 meters)


B&C DE680TN-16

MLSSA: Frequency Domain

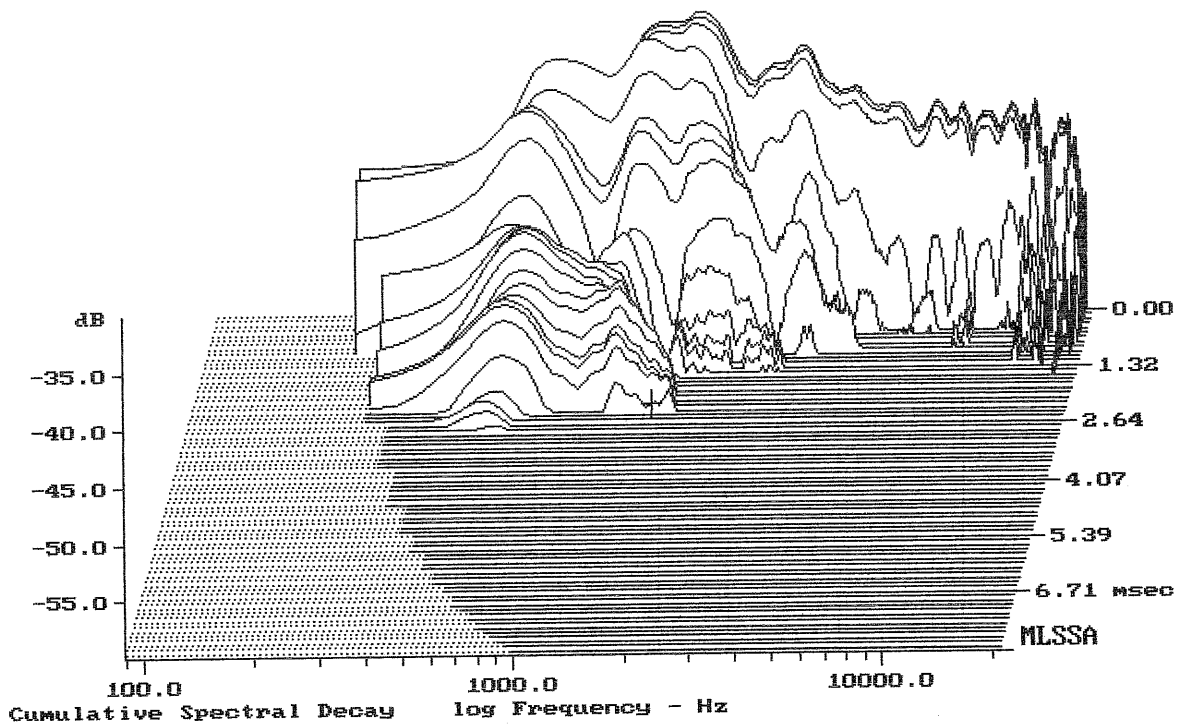

-59.37 dB, 1554 Hz (35), 2.310 msec (22)


DTTO

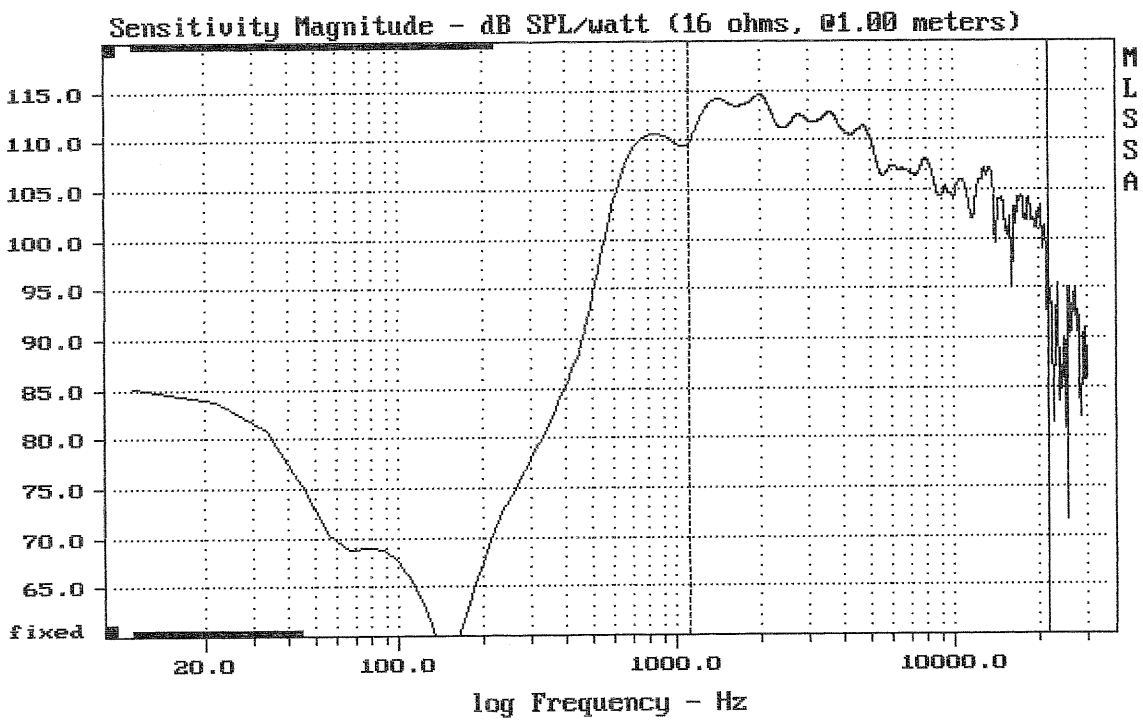

Level (1110:21950 Hz) = 110.39 dB SPL/watt (16 ohms, @1.00 meters)


B&C DE680TN-16 + B8575

MLSSA: Frequency Domain

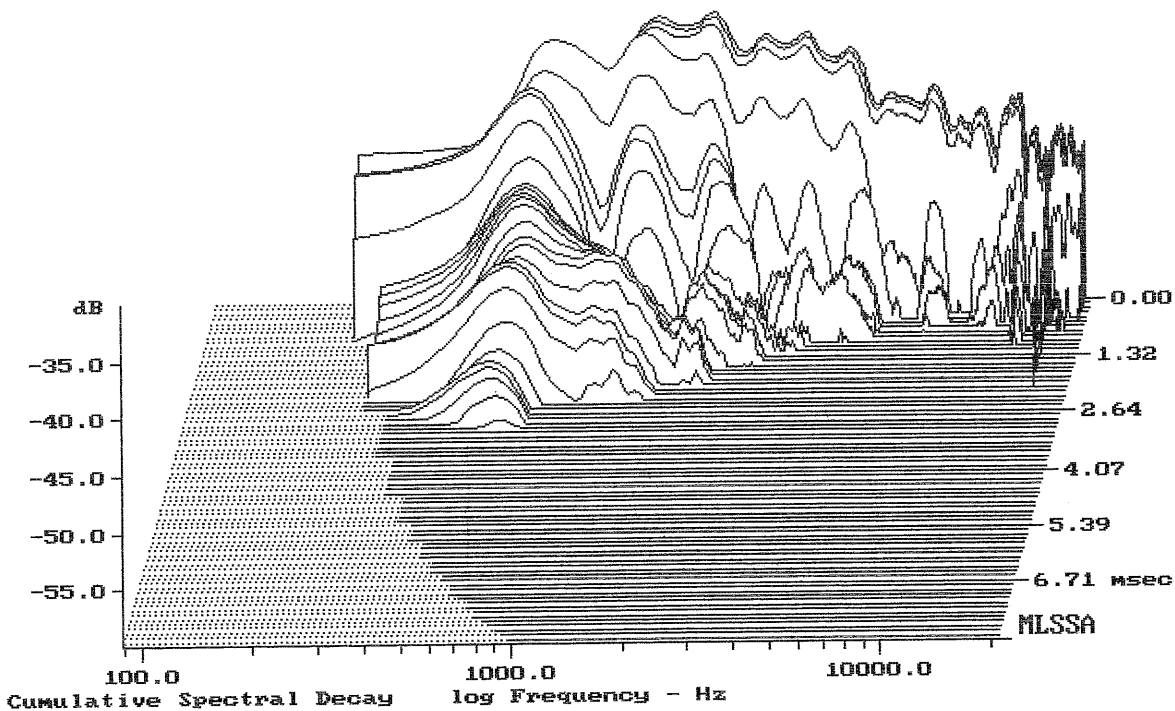

-60.00 dB, 16513 Hz (372), 1.760 msec (17)


DTTO

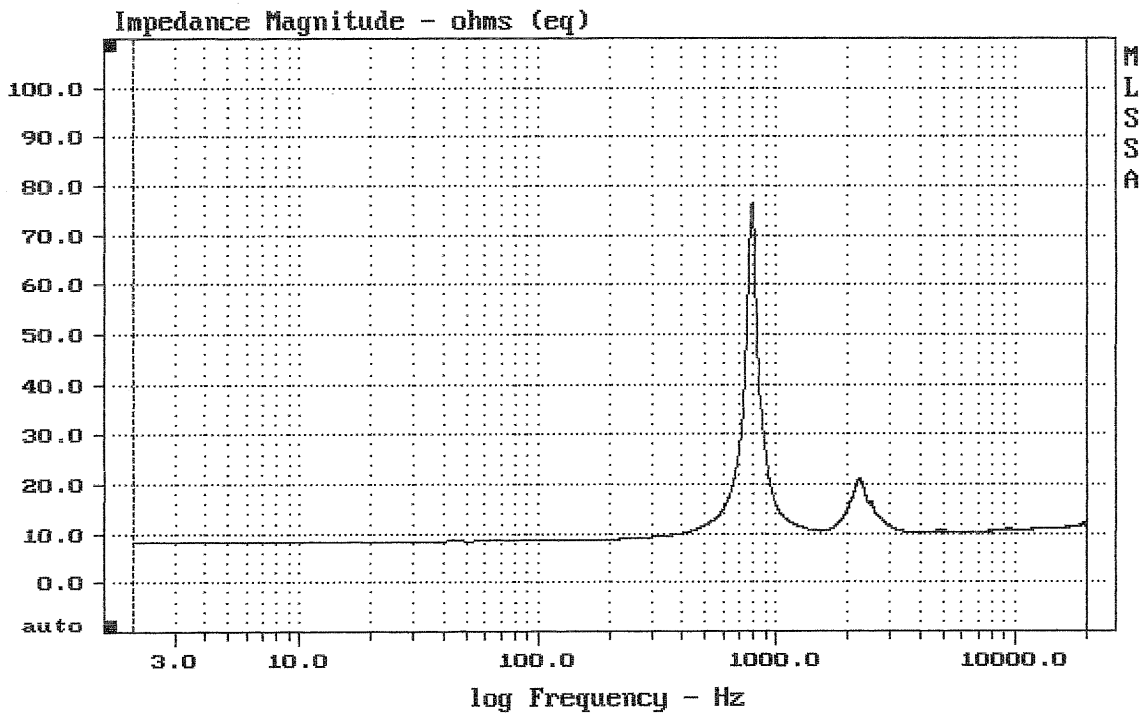

mean: 11.59, rms: 12.35, std: 4.264, max: 76.42, min: 8.185

DE680TN-16

MLSSA: Frequency Domain

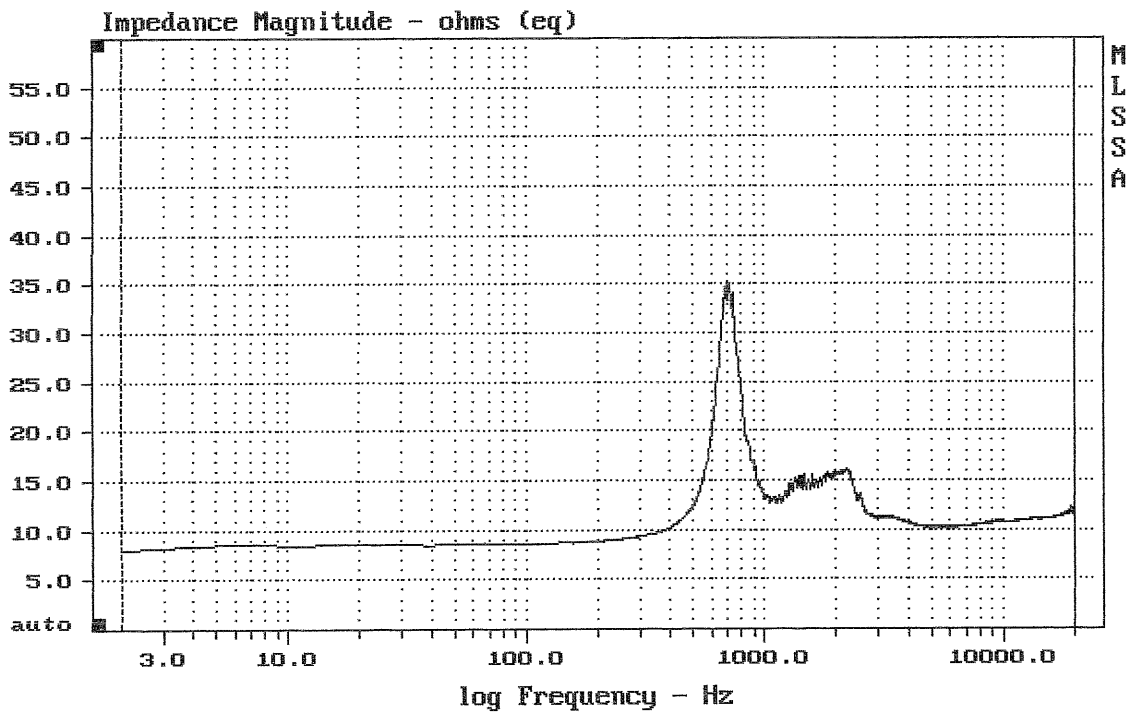

mean: 11.43, rms: 11.66, std: 2.287, max: 35.26, min: 8.041

DE680TN-16 + ME90

MLSSA: Frequency Domain