

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	32.24	Hz
3	Re	6.28	Ohms[dc]
4	Res	88.03	Ohms
5	Qms	8.01	
6	Qes	0.57	
7	Qts	0.53	
8	L1	0.65	mH
9	L2	1.29	mH
10	R2	6.88	Ohms
11	RMSE-load	0.58	Ohms
12	Vas(Sd)	422.91	liters
13	Mms	59.20	grams
14	Cms	412	$\mu\text{M}/\text{Newton}$
15	B1	11.48	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

EMINENCE BETA 15


MLSSA: Parameters

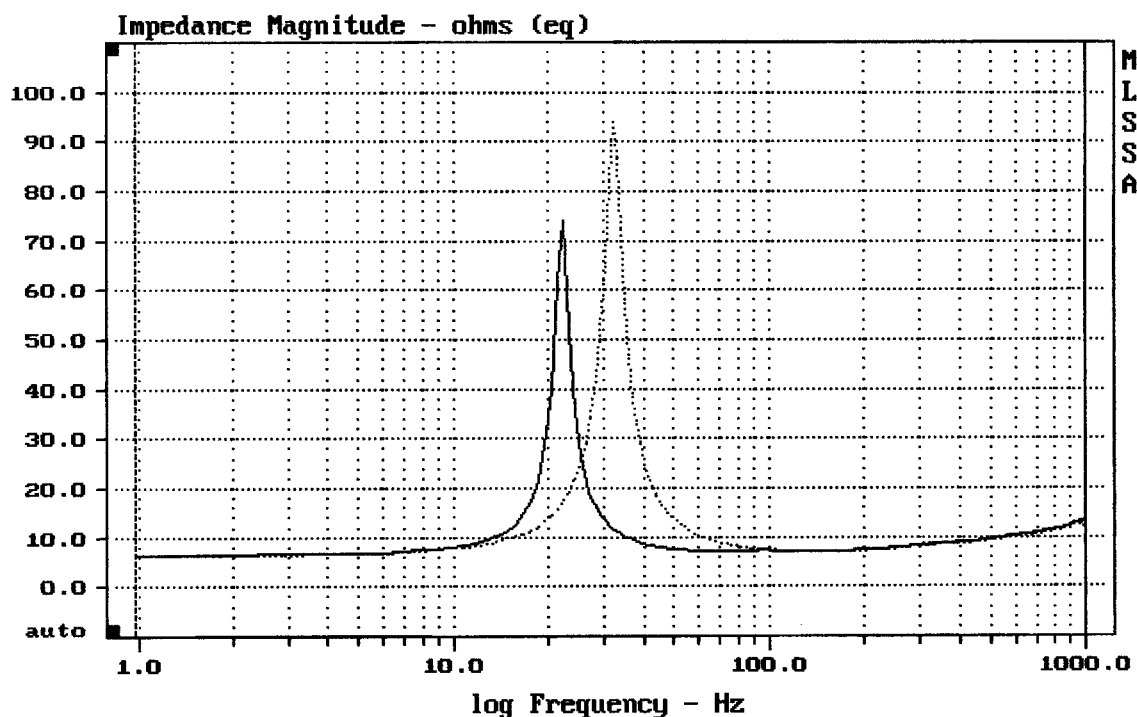

CURSOR: dy = -1.09028 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

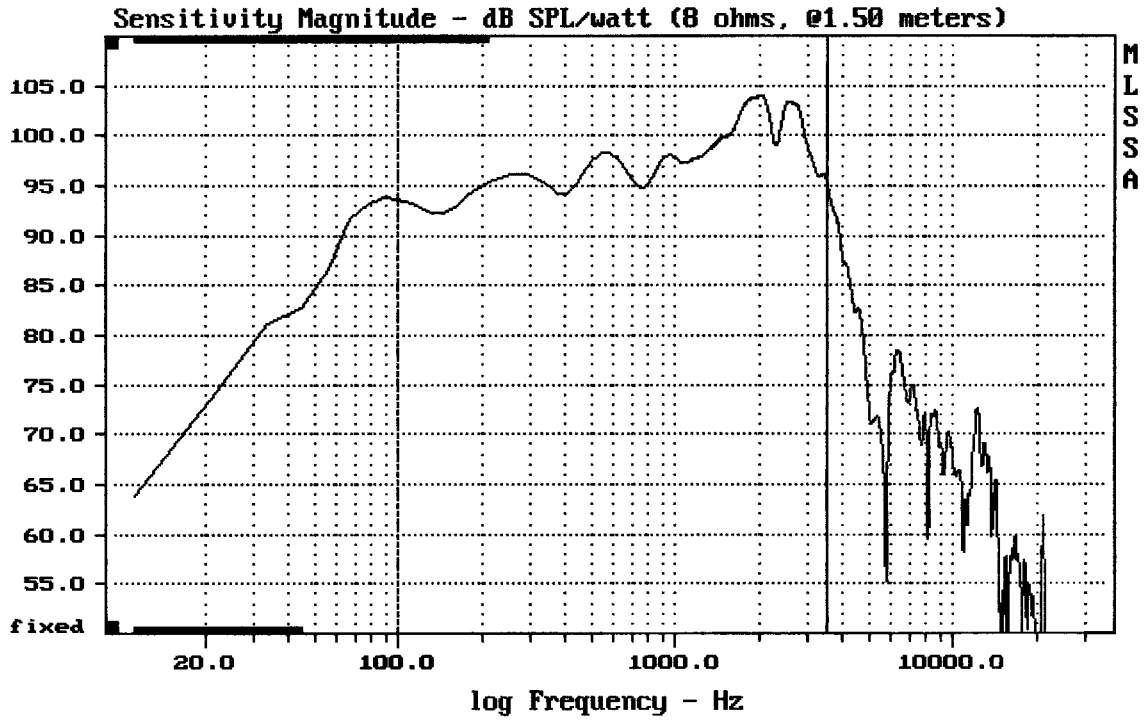

Level (100:3507 Hz) = 98.17 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE BETA 15

MLSSA: Frequency Domain

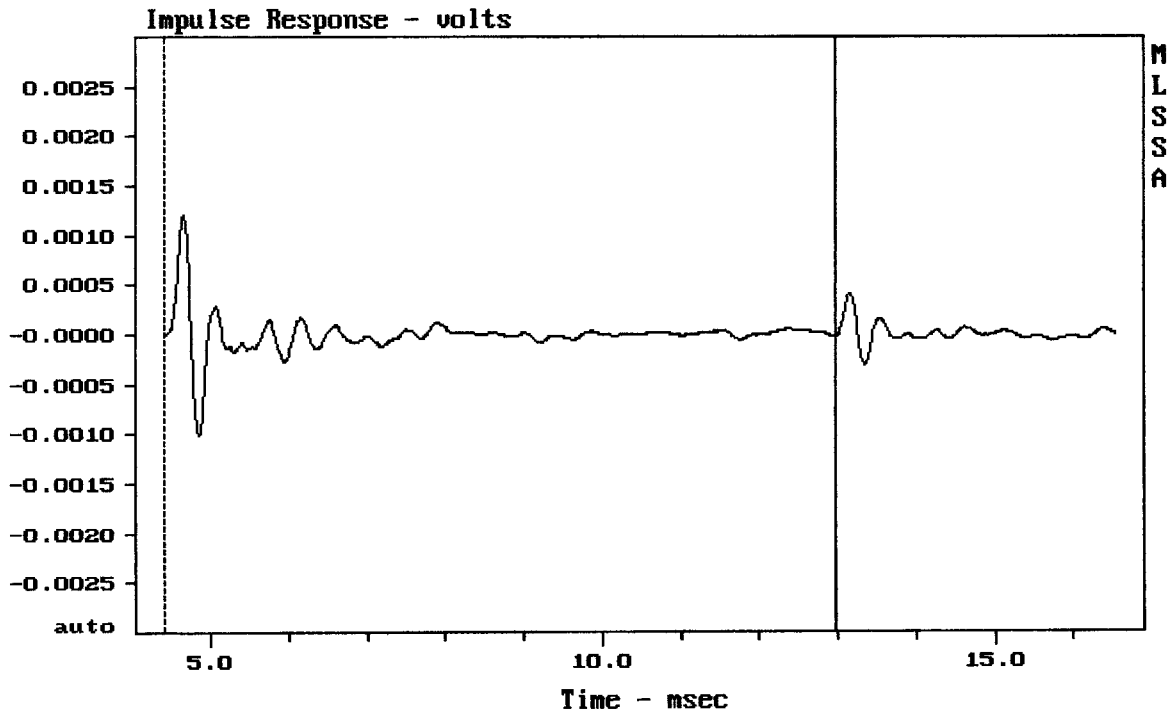

mean: -1.328e-006, rms: 0.0001897, std: 0.0001897, max: 0.001202, min: -0.00102

EMINENCE BETA 15