

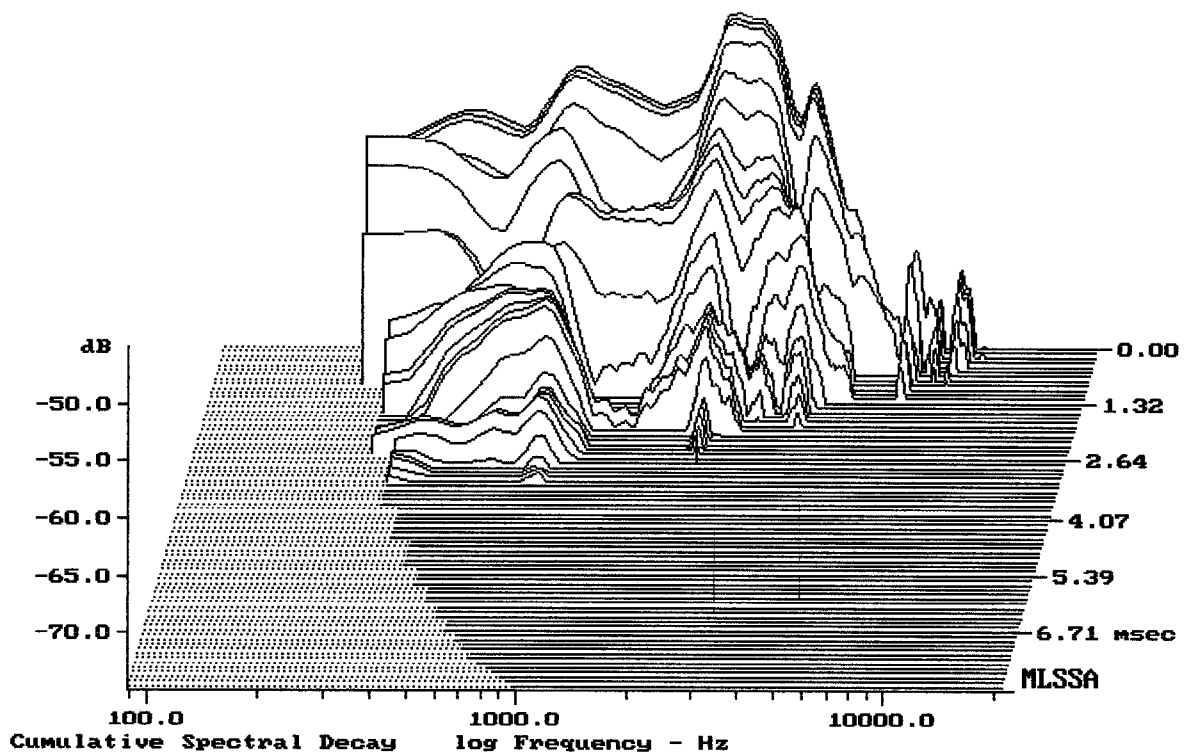

---

Level (100:4006 Hz) = 94.39 dB SPL/watt (8 ohms, @1.00 meters)

---

BMS 12S330 2x

MLSSA: Frequency Domain



-74.39 dB, 2042 Hz (46), 2.530 msec (24)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.56	Ohms
2	Fs	28.07	Hz
3	Re	5.82	Ohms[dc]
4	Res	167.66	Ohms
5	Qms	7.48	
6	Qes	0.26	
7	Qts	0.25	
8	L1	0.73	mH
9	L2	1.54	mH
10	R2	3.65	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	96.27	liters
13	Mms	117.27	grams
14	Cms	274	$\mu\text{M}/\text{Newton}$
15	B1	21.53	Tesla-M
16	SPLref(Sd)	91.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 500.00 sq cm

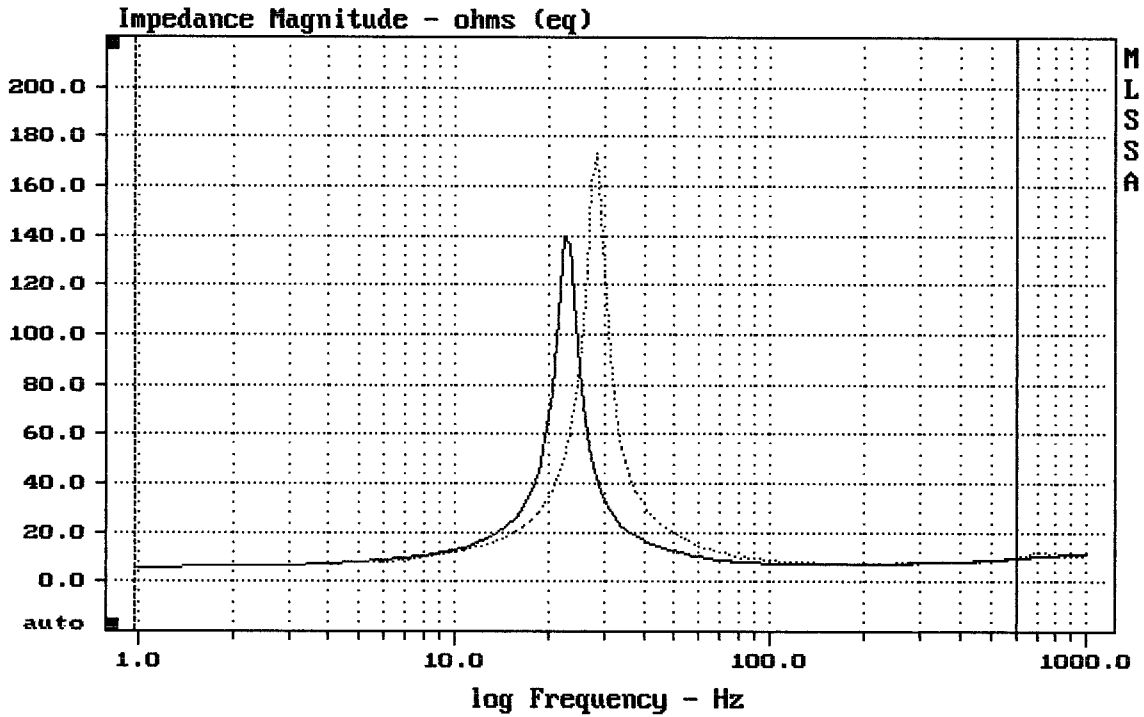
DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -18.7% (-20% to -50% is recommended).

BMS 12S330 32-91

MLSSA: Parameters



mean: 11.24, rms: 18.65, std: 14.88, max: 173.1, min: 6.057

MLSSA: Frequency Domain