

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.29	Ohms
2	Fs	54.48	Hz
3	Re	5.40	Ohms [dc]
4	Res	48.20	Ohms
5	Qms	4.76	
6	Qes	0.53	
7	Qts	0.48	
8	L1	0.60	mH
9	L2	0.78	mH
10	R2	3.20	Ohms
11	RMSE-load	0.41	Ohms
12	Vas (Sd)	63.69	liters
13	Mms	53.06	grams
14	Cms	161	$\mu$ M/Newton
15	B1	13.57	Tesla-M
16	SPLref (Sd)	94.7	dB [Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.3% (-20% to -50% is recommended).

FANE CLA 12-200

MLSSA: Parameters

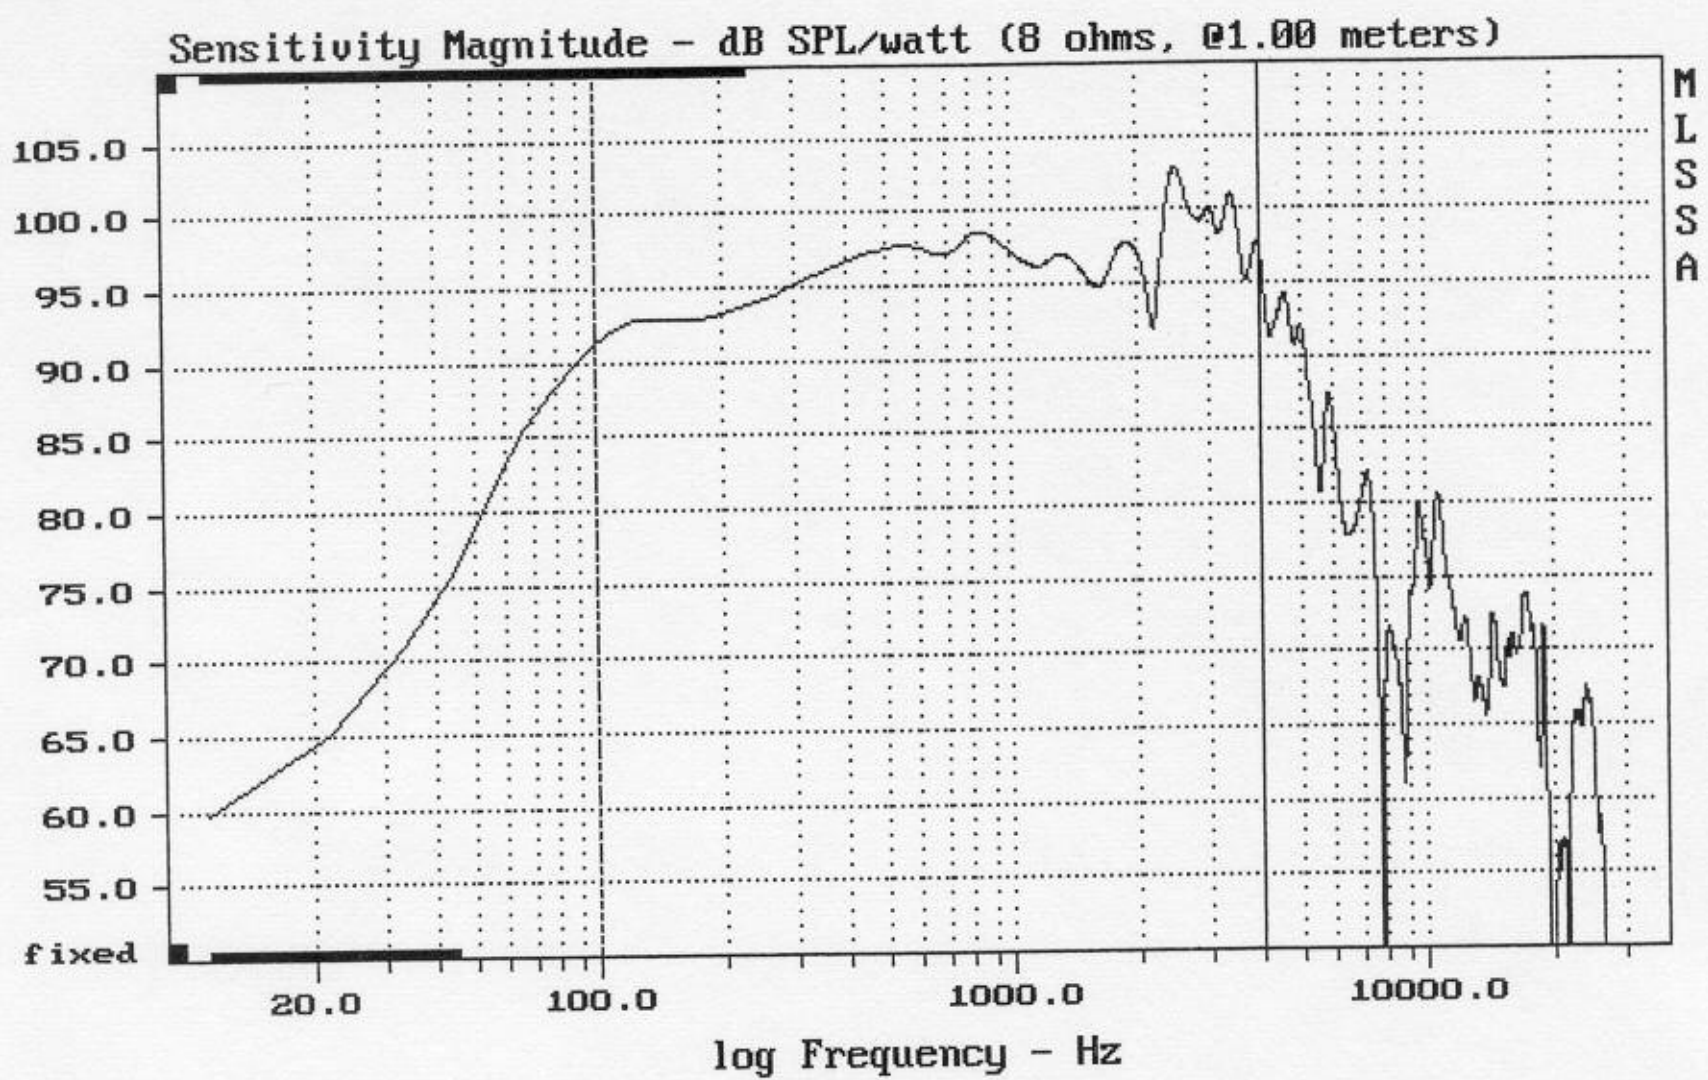


---

Level (100:4006 Hz) = 96.73 dB SPL/watt (8 ohms, @1.00 meters)

---

FANE CLA 12-200