

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	41.94	Hz
3	Re	6.33	Ohms [dc]
4	Res	44.32	Ohms
5	Qms	6.04	
6	Qes	0.86	
7	Qts	0.76	
8	L1	0.68	mH
9	L2	0.64	mH
10	R2	3.06	Ohms
11	RMSE-load	0.35	Ohms
12	Vas (Sd)	210.28	liters
13	Mms	70.35	grams
14	Cms	205	$\mu\text{M}/\text{Newton}$
15	B1	11.66	Tesla-M
16	SPLref (Sd)	94.4	dB [Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.6% (-20% to -50% is recommended).

FANE CLA 15-150

MLSSA: Parameters

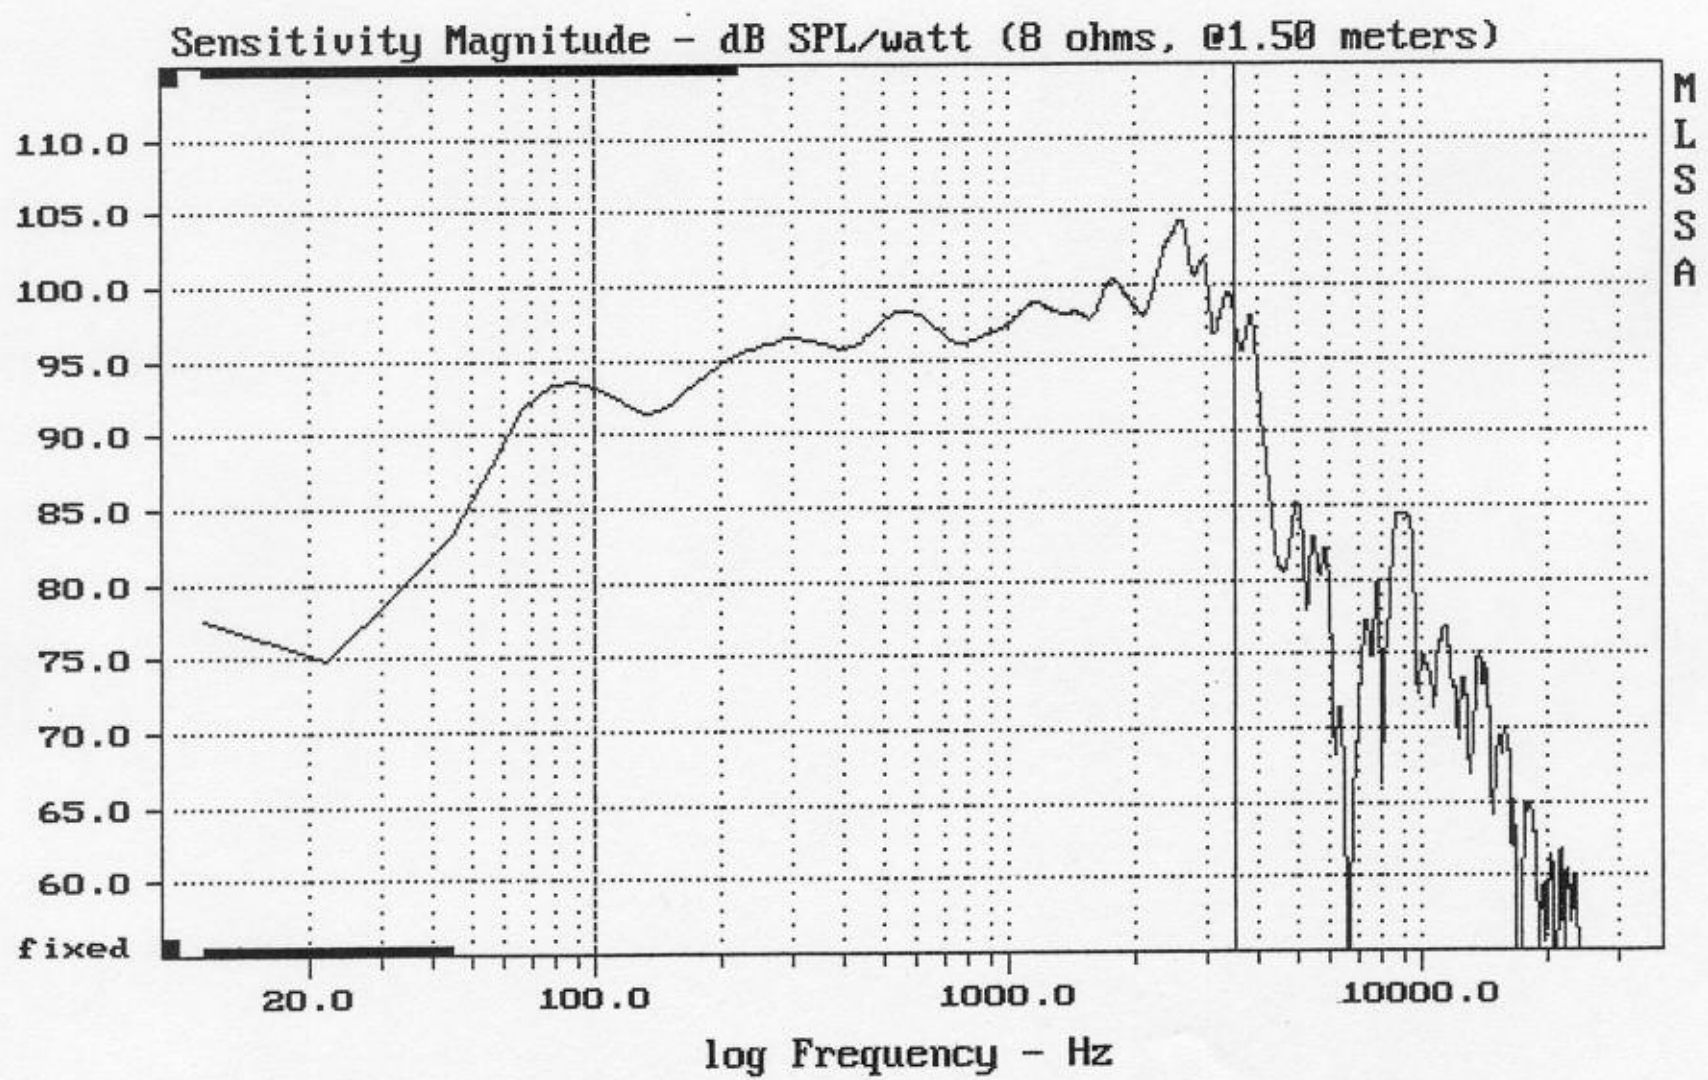

Level (100:3507 Hz) = 97.65 dB SPL/watt (8 ohms, @1.50 meters)

FANE CLA15-150