

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	35.68	Hz
3	Re	5.37	Ohms [dc]
4	Res	73.78	Ohms
5	Qms	4.84	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.71	mH
9	L2	1.12	mH
10	R2	5.08	Ohms
11	RMSE-load	0.50	Ohms
12	Vas (Sd)	239.57	liters
13	Mms	85.31	grams
14	Cms	233	μ M/Newton
15	B1	17.07	Tesla-M
16	SPLref (Sd)	96.7	dB [Re]
17	Rub-index	0.00	

EBP: 108,1

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.9% (-20% to -50% is recommended).

FANE CLA 15-300

MLSSA: Parameters

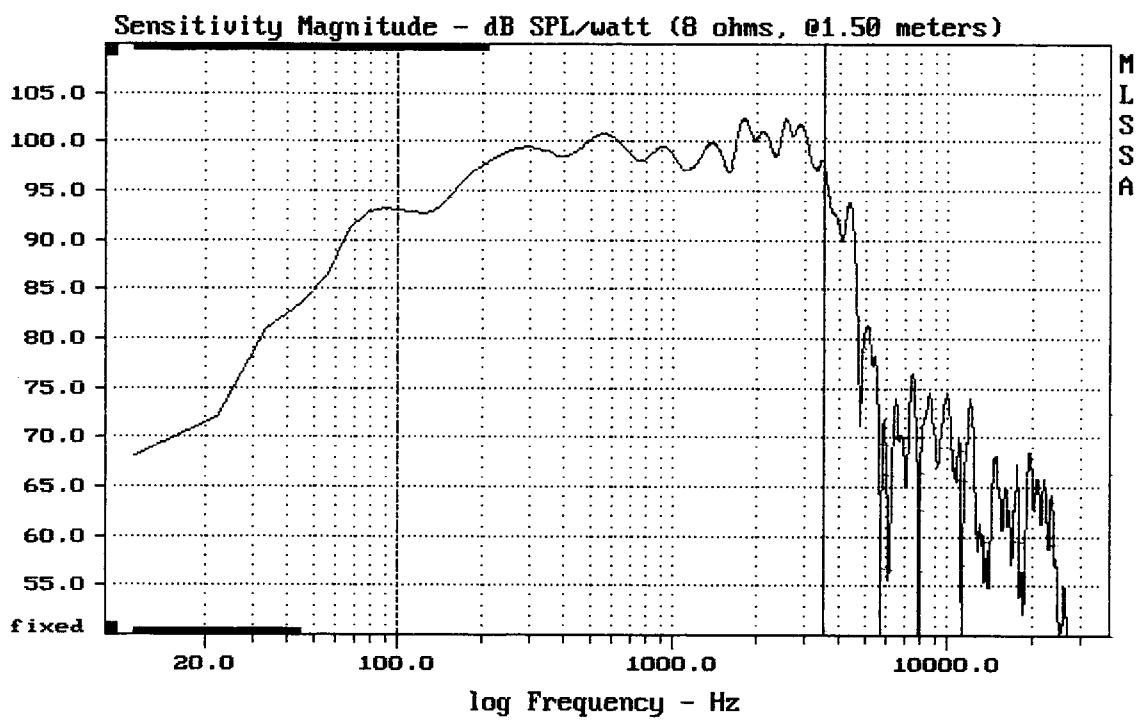

Level (100:3507 Hz) = 98.80 dB SPL/watt (8 ohms, @1.50 meters)

CLA15-300