

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.55	Ohms
2	Fs	50.85	Hz
3	Re	5.11	Ohms[dc]
4	Res	106.33	Ohms
5	Qms	8.39	
6	Qes	0.40	
7	Qts	0.38	
8	L1	1.34	mH
9	L2	1.88	mH
10	R2	6.14	Ohms
11	RMSE-load	0.78	Ohms
12	Vas(Sd)	56.08	liters
13	Mms	74.23	grams
14	Cms	132	$\mu\text{M}/\text{Newton}$
15	B1	17.34	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 550.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.5% (-20% to -50% is recommended).


FANE COL12B

MLSSA: Parameters

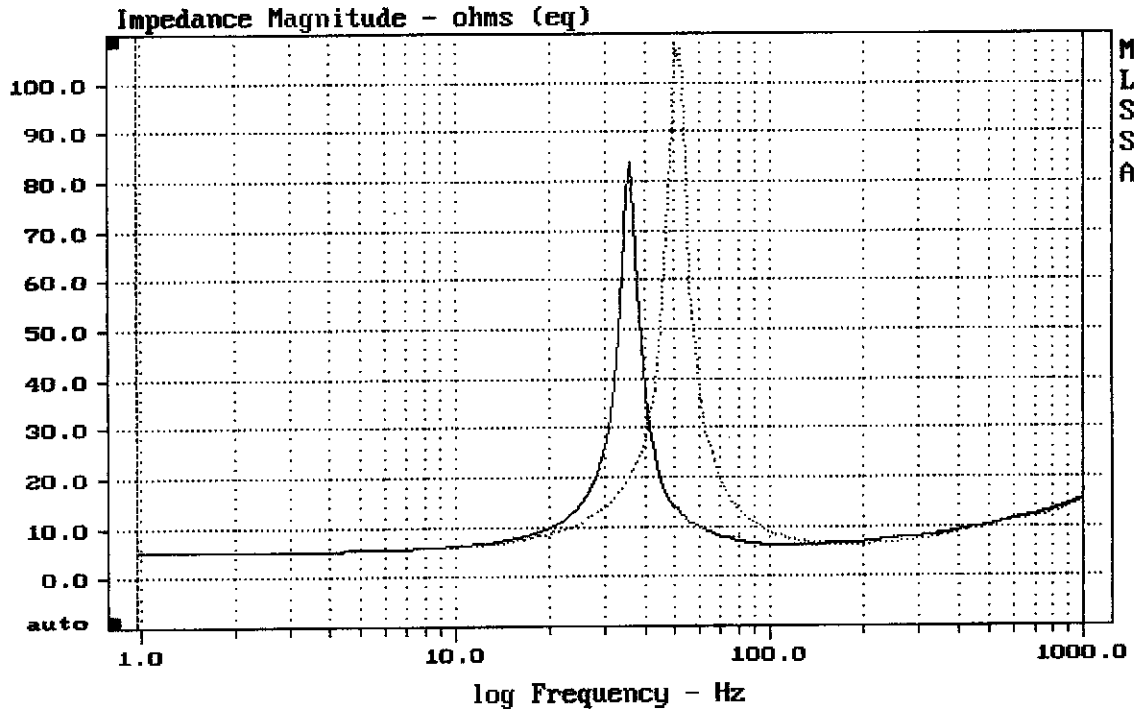

mean: 11.73, rms: 14.76, std: 8.964, max: 107.7, min: 5.154


MLSSA: Frequency Domain

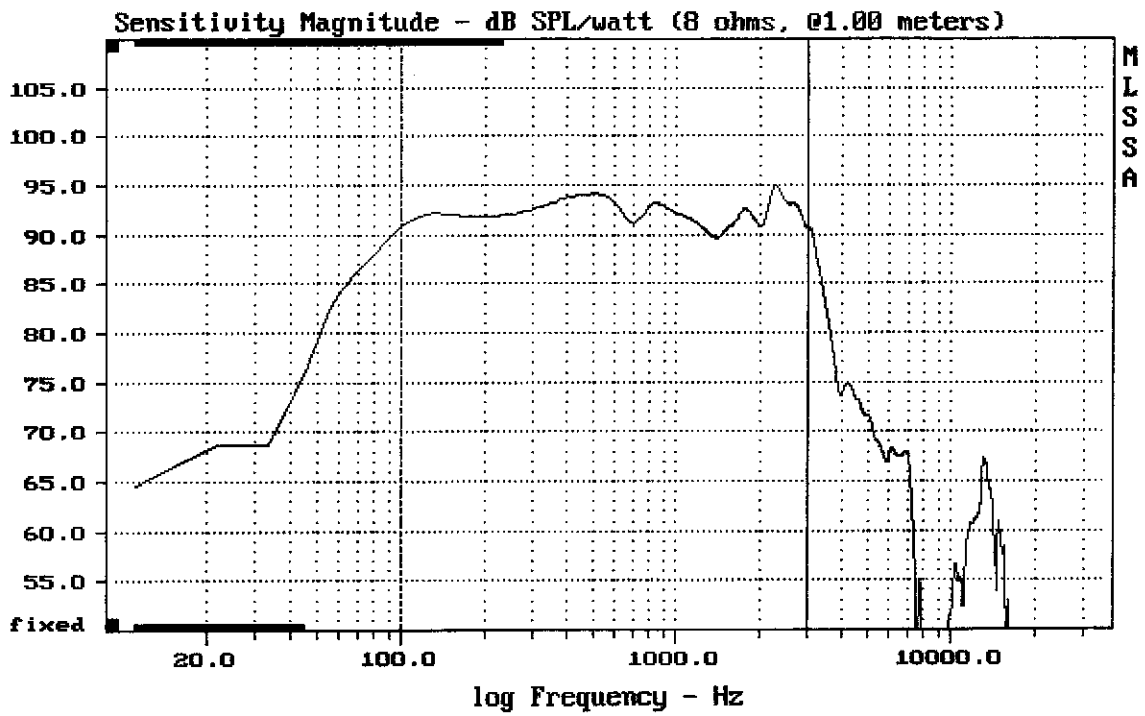

Level (100:2996 Hz) = 92.44 dB SPL/watt (8 ohms, @1.00 meters)

FANE COL12B

MLSSA: Frequency Domain

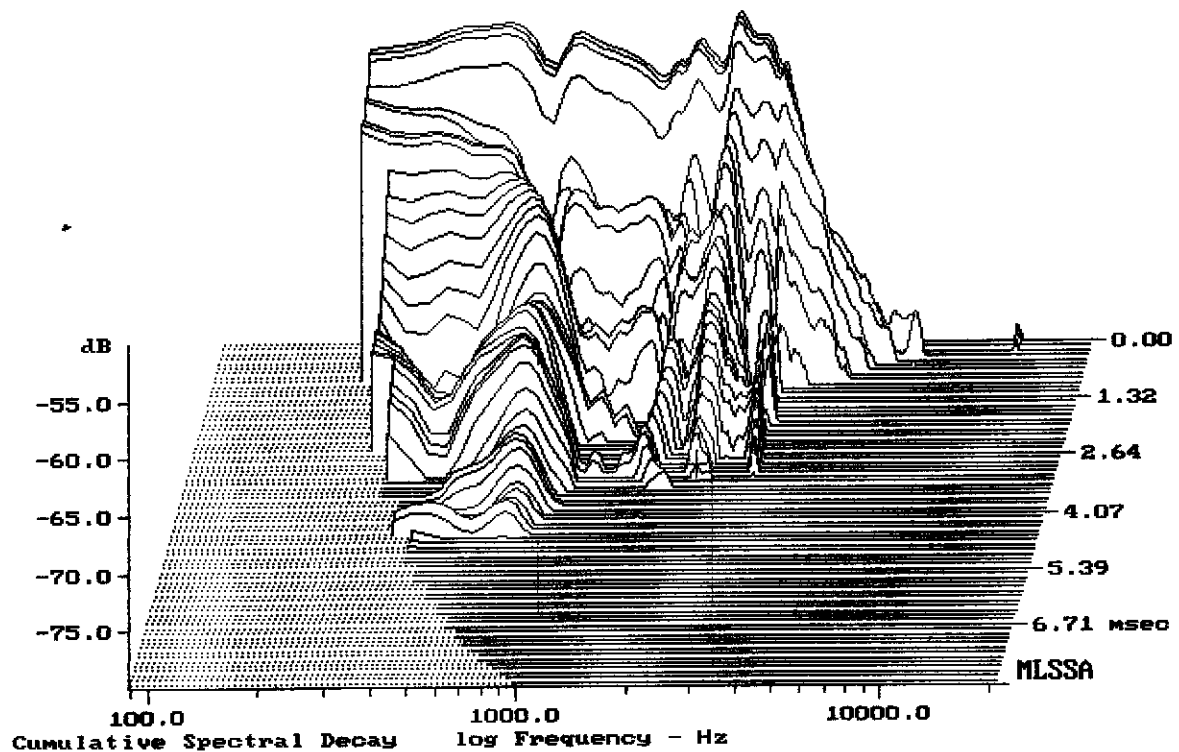

-78.84 dB, 2175 Hz (49), 3.190 msec (30)