

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.30	Ohms
2	Fs	50.43	Hz
3	Re	4.95	Ohms[dc]
4	Res	26.81	Ohms
5	Qms	2.32	
6	Qes	0.43	
7	Qts	0.36	
8	L1	0.77	mH
9	L2	1.77	mH
10	R2	7.31	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	106.74	liters
13	Mms	88.14	grams
14	Cms	113	$\mu\text{M}/\text{Newton}$
15	B1	17.95	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.03	

EBP: 140,1

Method: Mass-loaded (80.00 grams)

Area (Sd): 820.00 sq cm


DCR mode: Measure (-0.26 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.3% (-20% to -50% is recommended).


FANE CRESC. 15B

MLSSA: Parameters

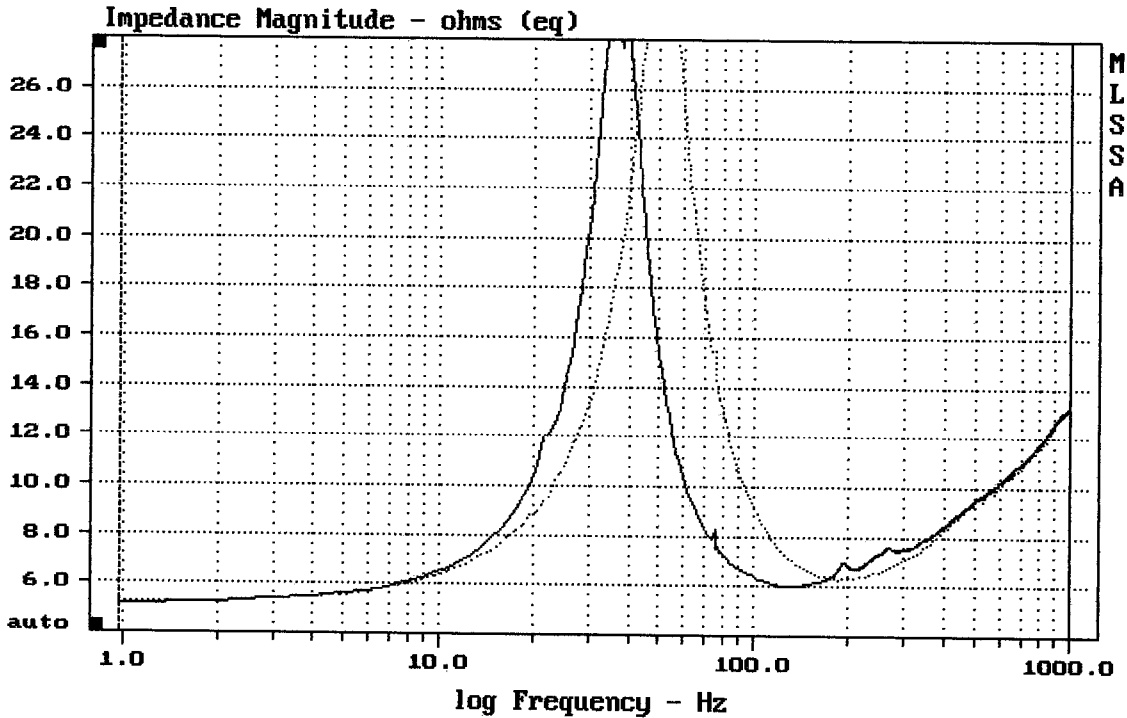

CURSOR: dy = -0.220997 x = 1000.9766 (1025)

MLSSA: Frequency Domain

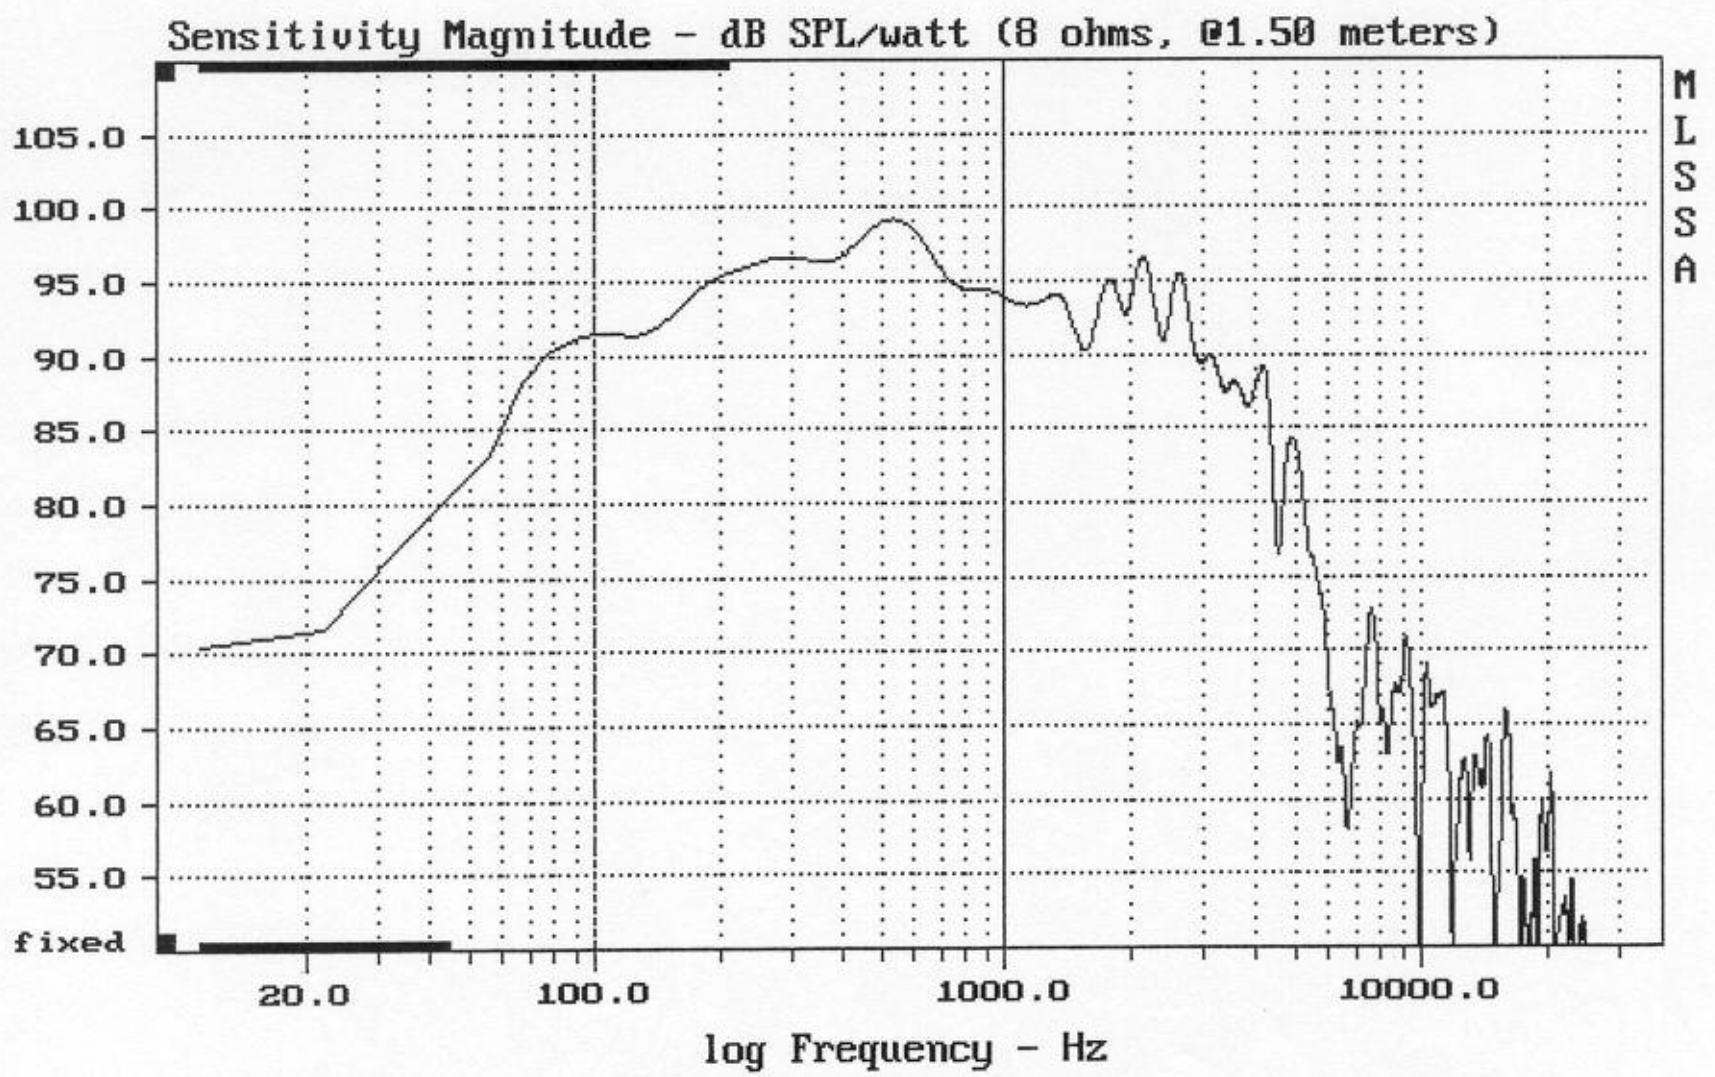

Level (100:999 Hz) = 95.83 dB SPL/watt (8 ohms, @1.50 meters)

FANE CR.15B