


Level (67:1709 Hz) = 90.62 dB SPL/watt (8 ohms, @1.00 meters)

DAS 12LXN

MLSSA: Frequency Domain

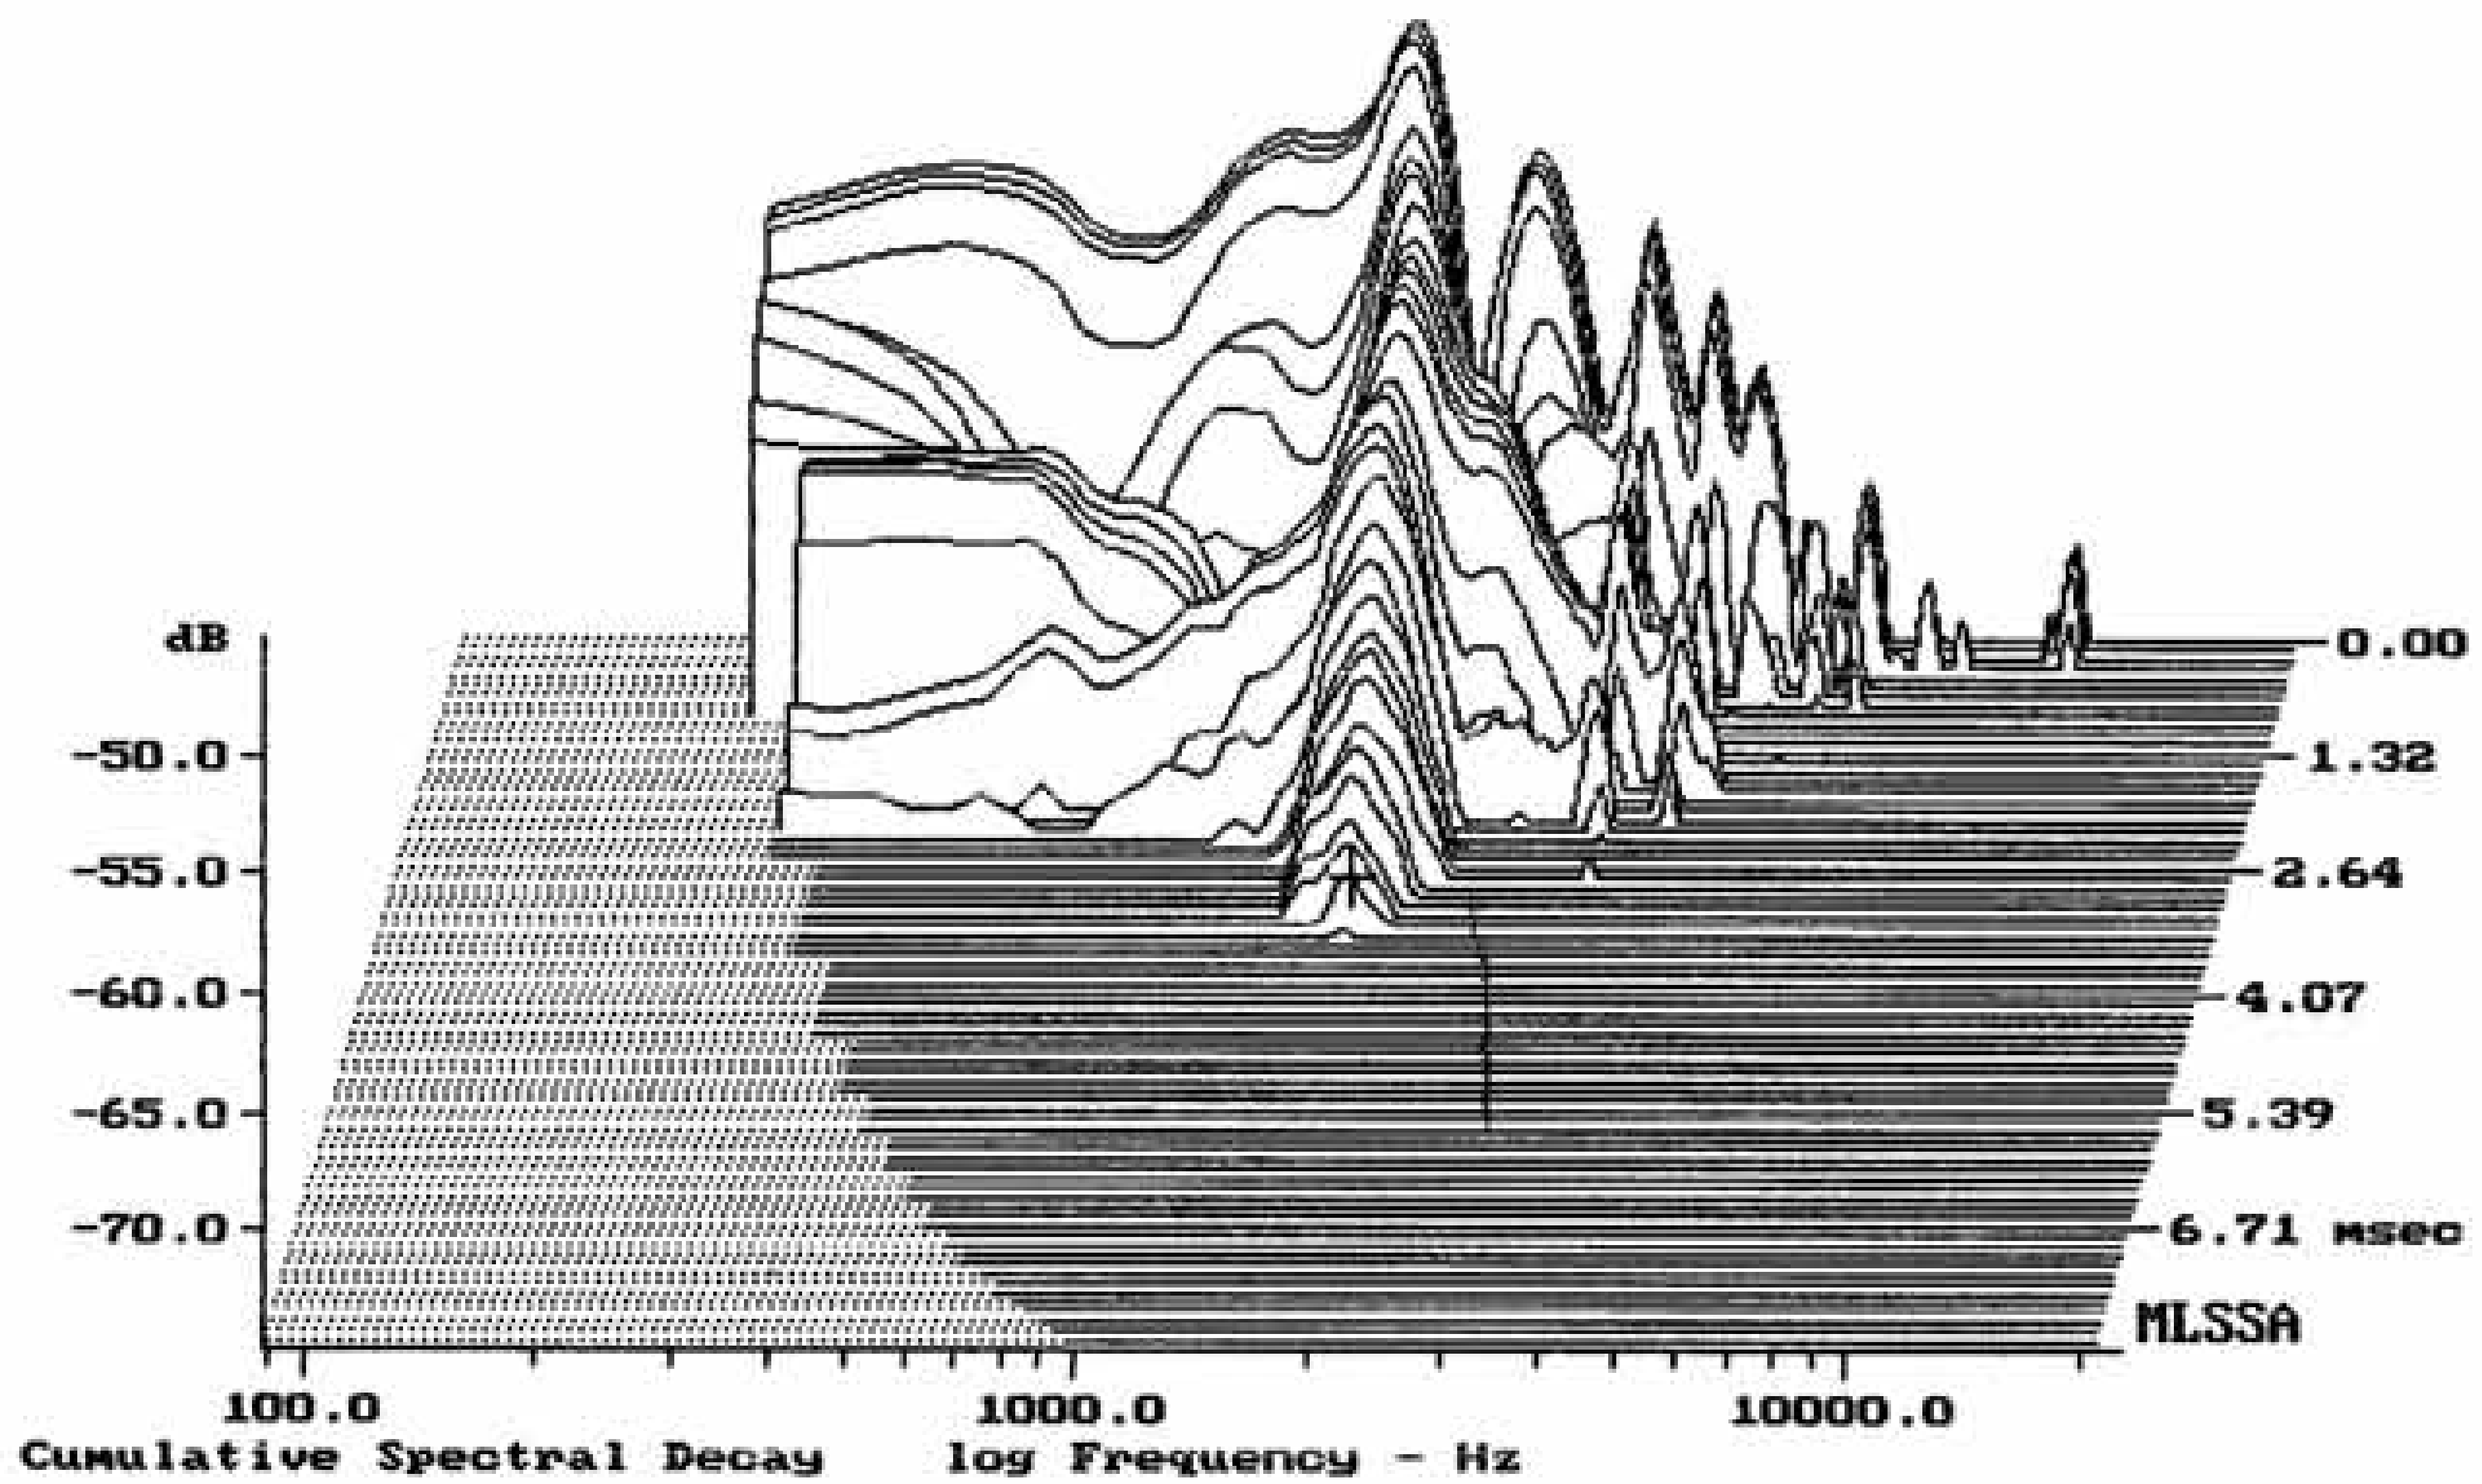

-72.92 dB, 1598 Hz (36), 3.300 msec (31)

MLSSA SPO 4.0D #960903-3057-3075 for
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	51.13	Hz
3	Re	5.28	Ohms[dc]
4	Res	40.39	Ohms
5	Qms	3.59	
6	Qes	0.47	
7	Qts	0.41	
8	L1	0.96	mH
9	L2	1.59	mH
10	R2	6.14	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	32.56	liters
13	Mms	104.51	grams
14	Cms	93	$\mu\text{M}/\text{Newton}$
15	B1	19.44	Tesla-M
16	SPLref(Sd)	91.5	dB[Re]
17	Rub-index	0.07	

Method: Mass-loaded (80.00 grams)

Area (Sd): 500.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.2% (-20% to -50% is recommended).

DAS 12LXN

MLSSA: Parameters

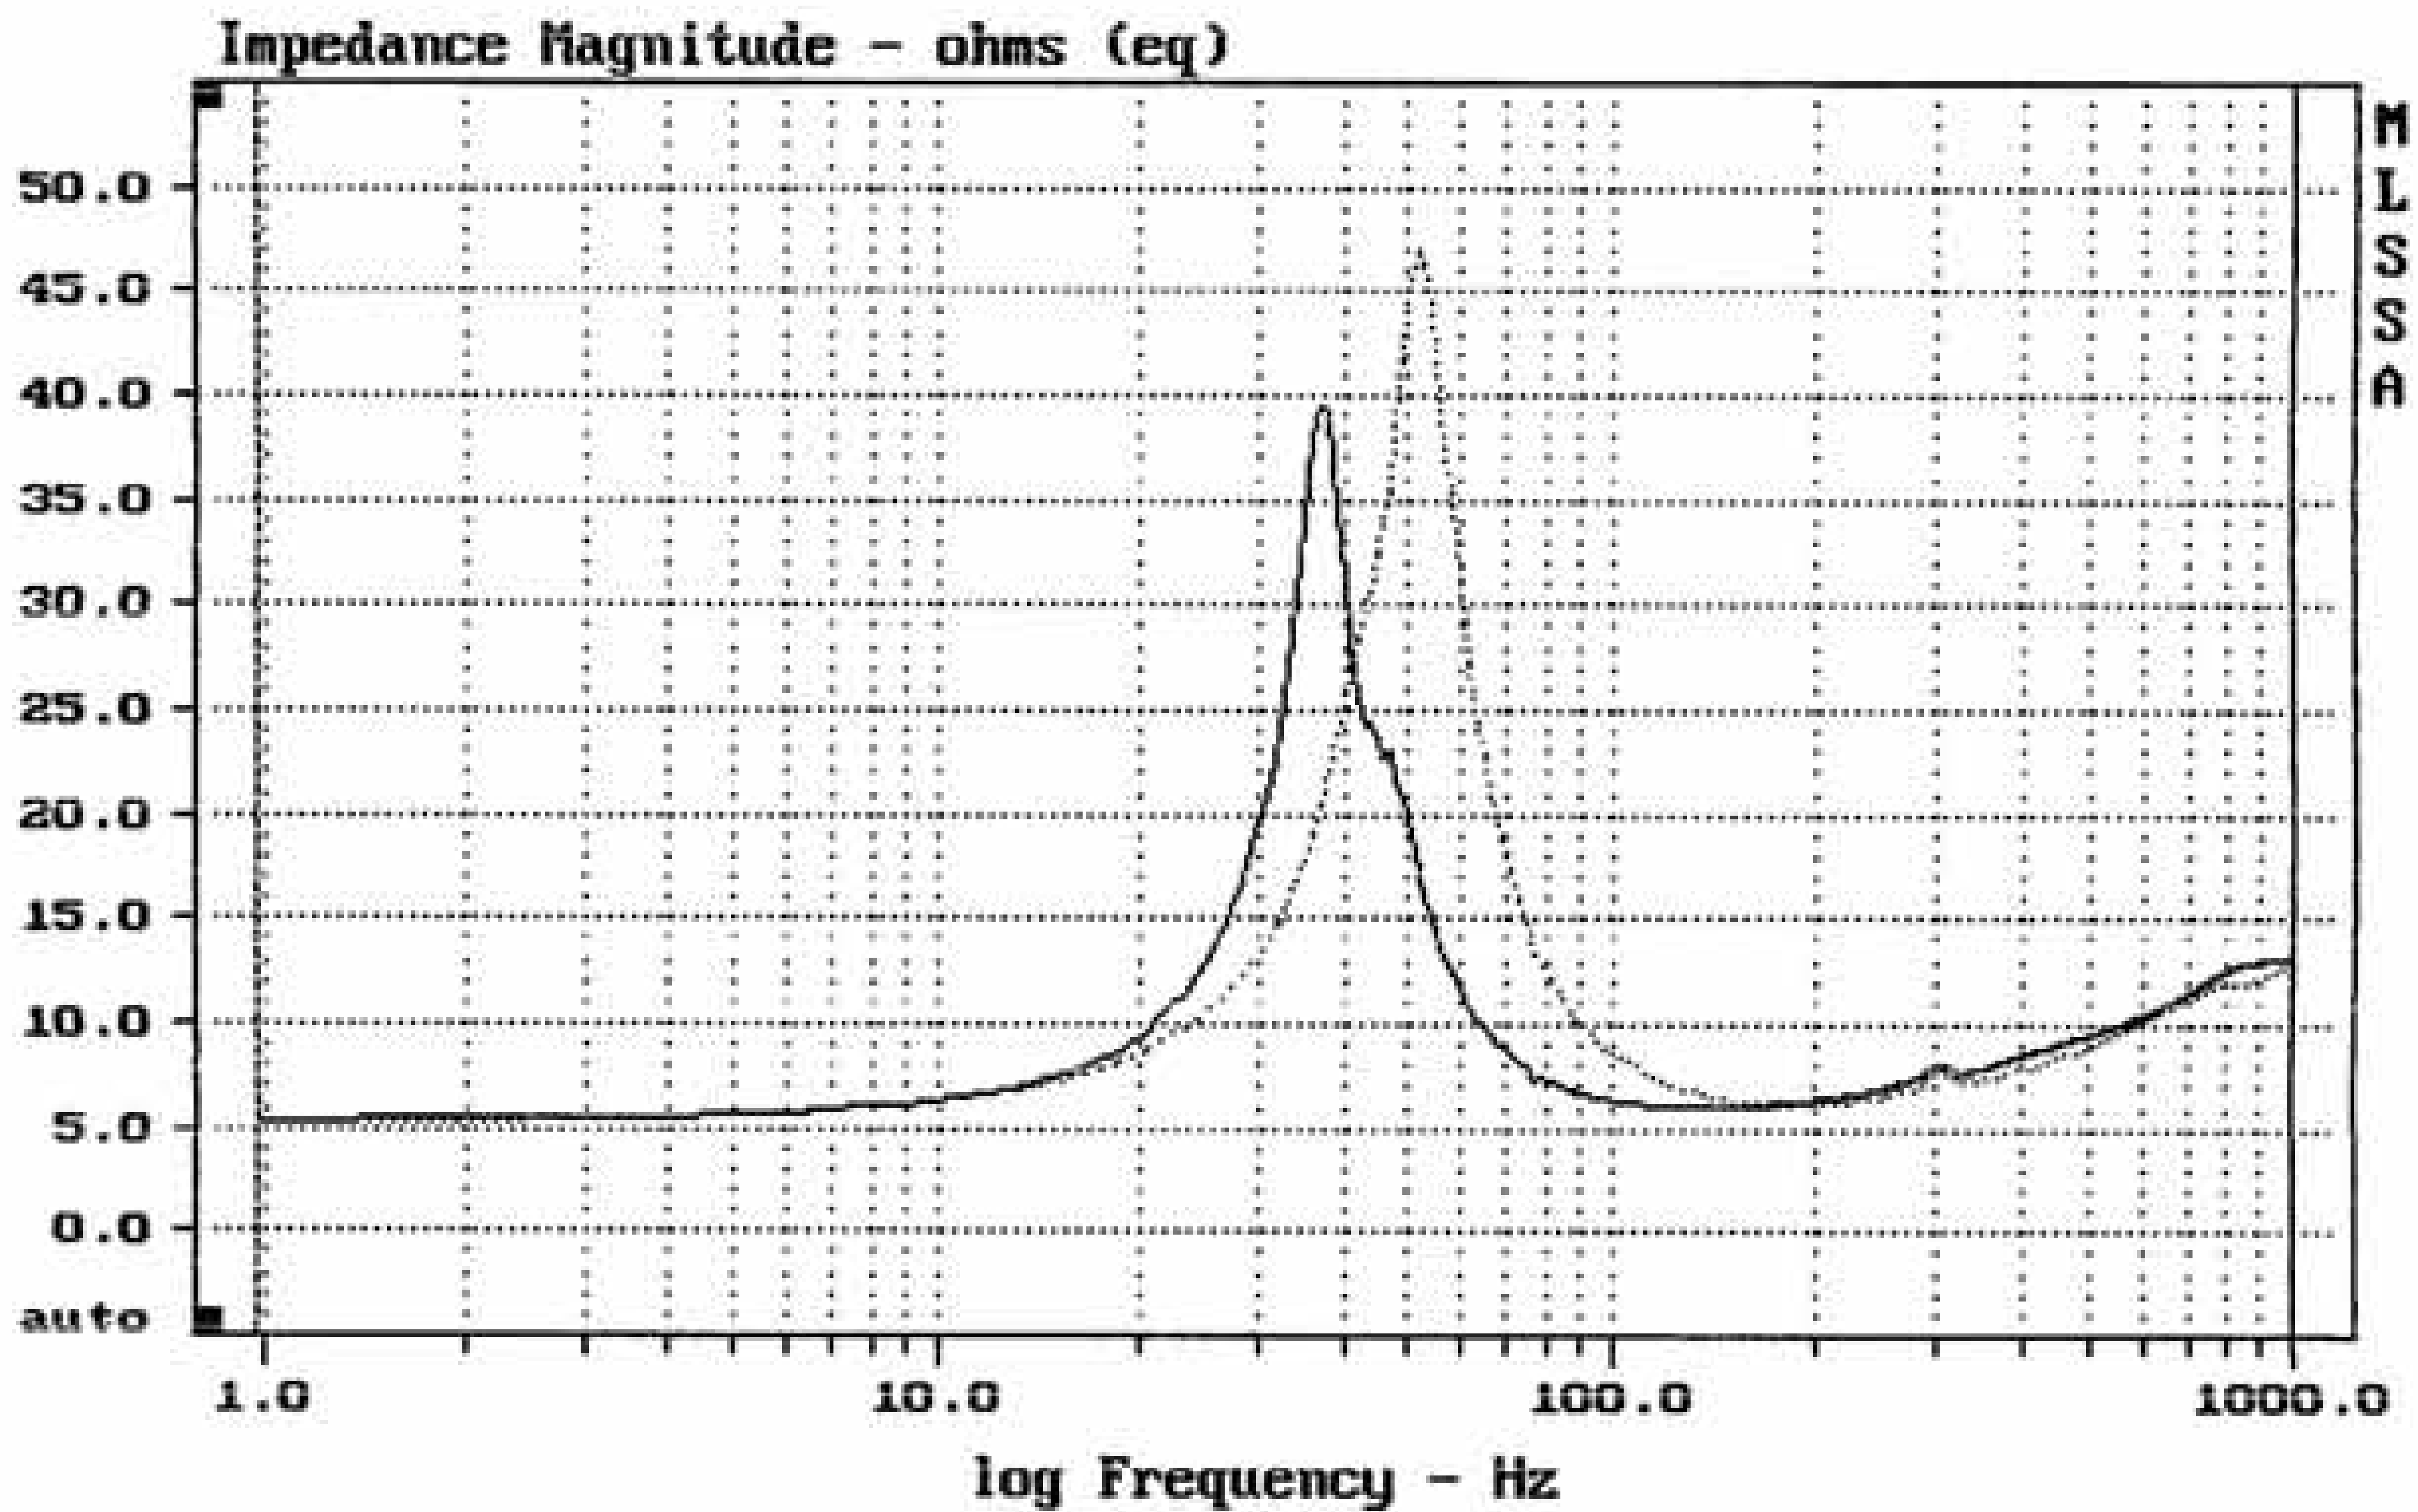

mean: 10.28, rms: 11.34, std: 4.779, max: 46.94, min: 5.39

DT10

MLSSA: Frequency Domain