


Level (100:1998 Hz) = 97.77 dB SPL/watt (8 ohms, @1.50 meters)

DAS 15GNR

MLSSA: Frequency Domain

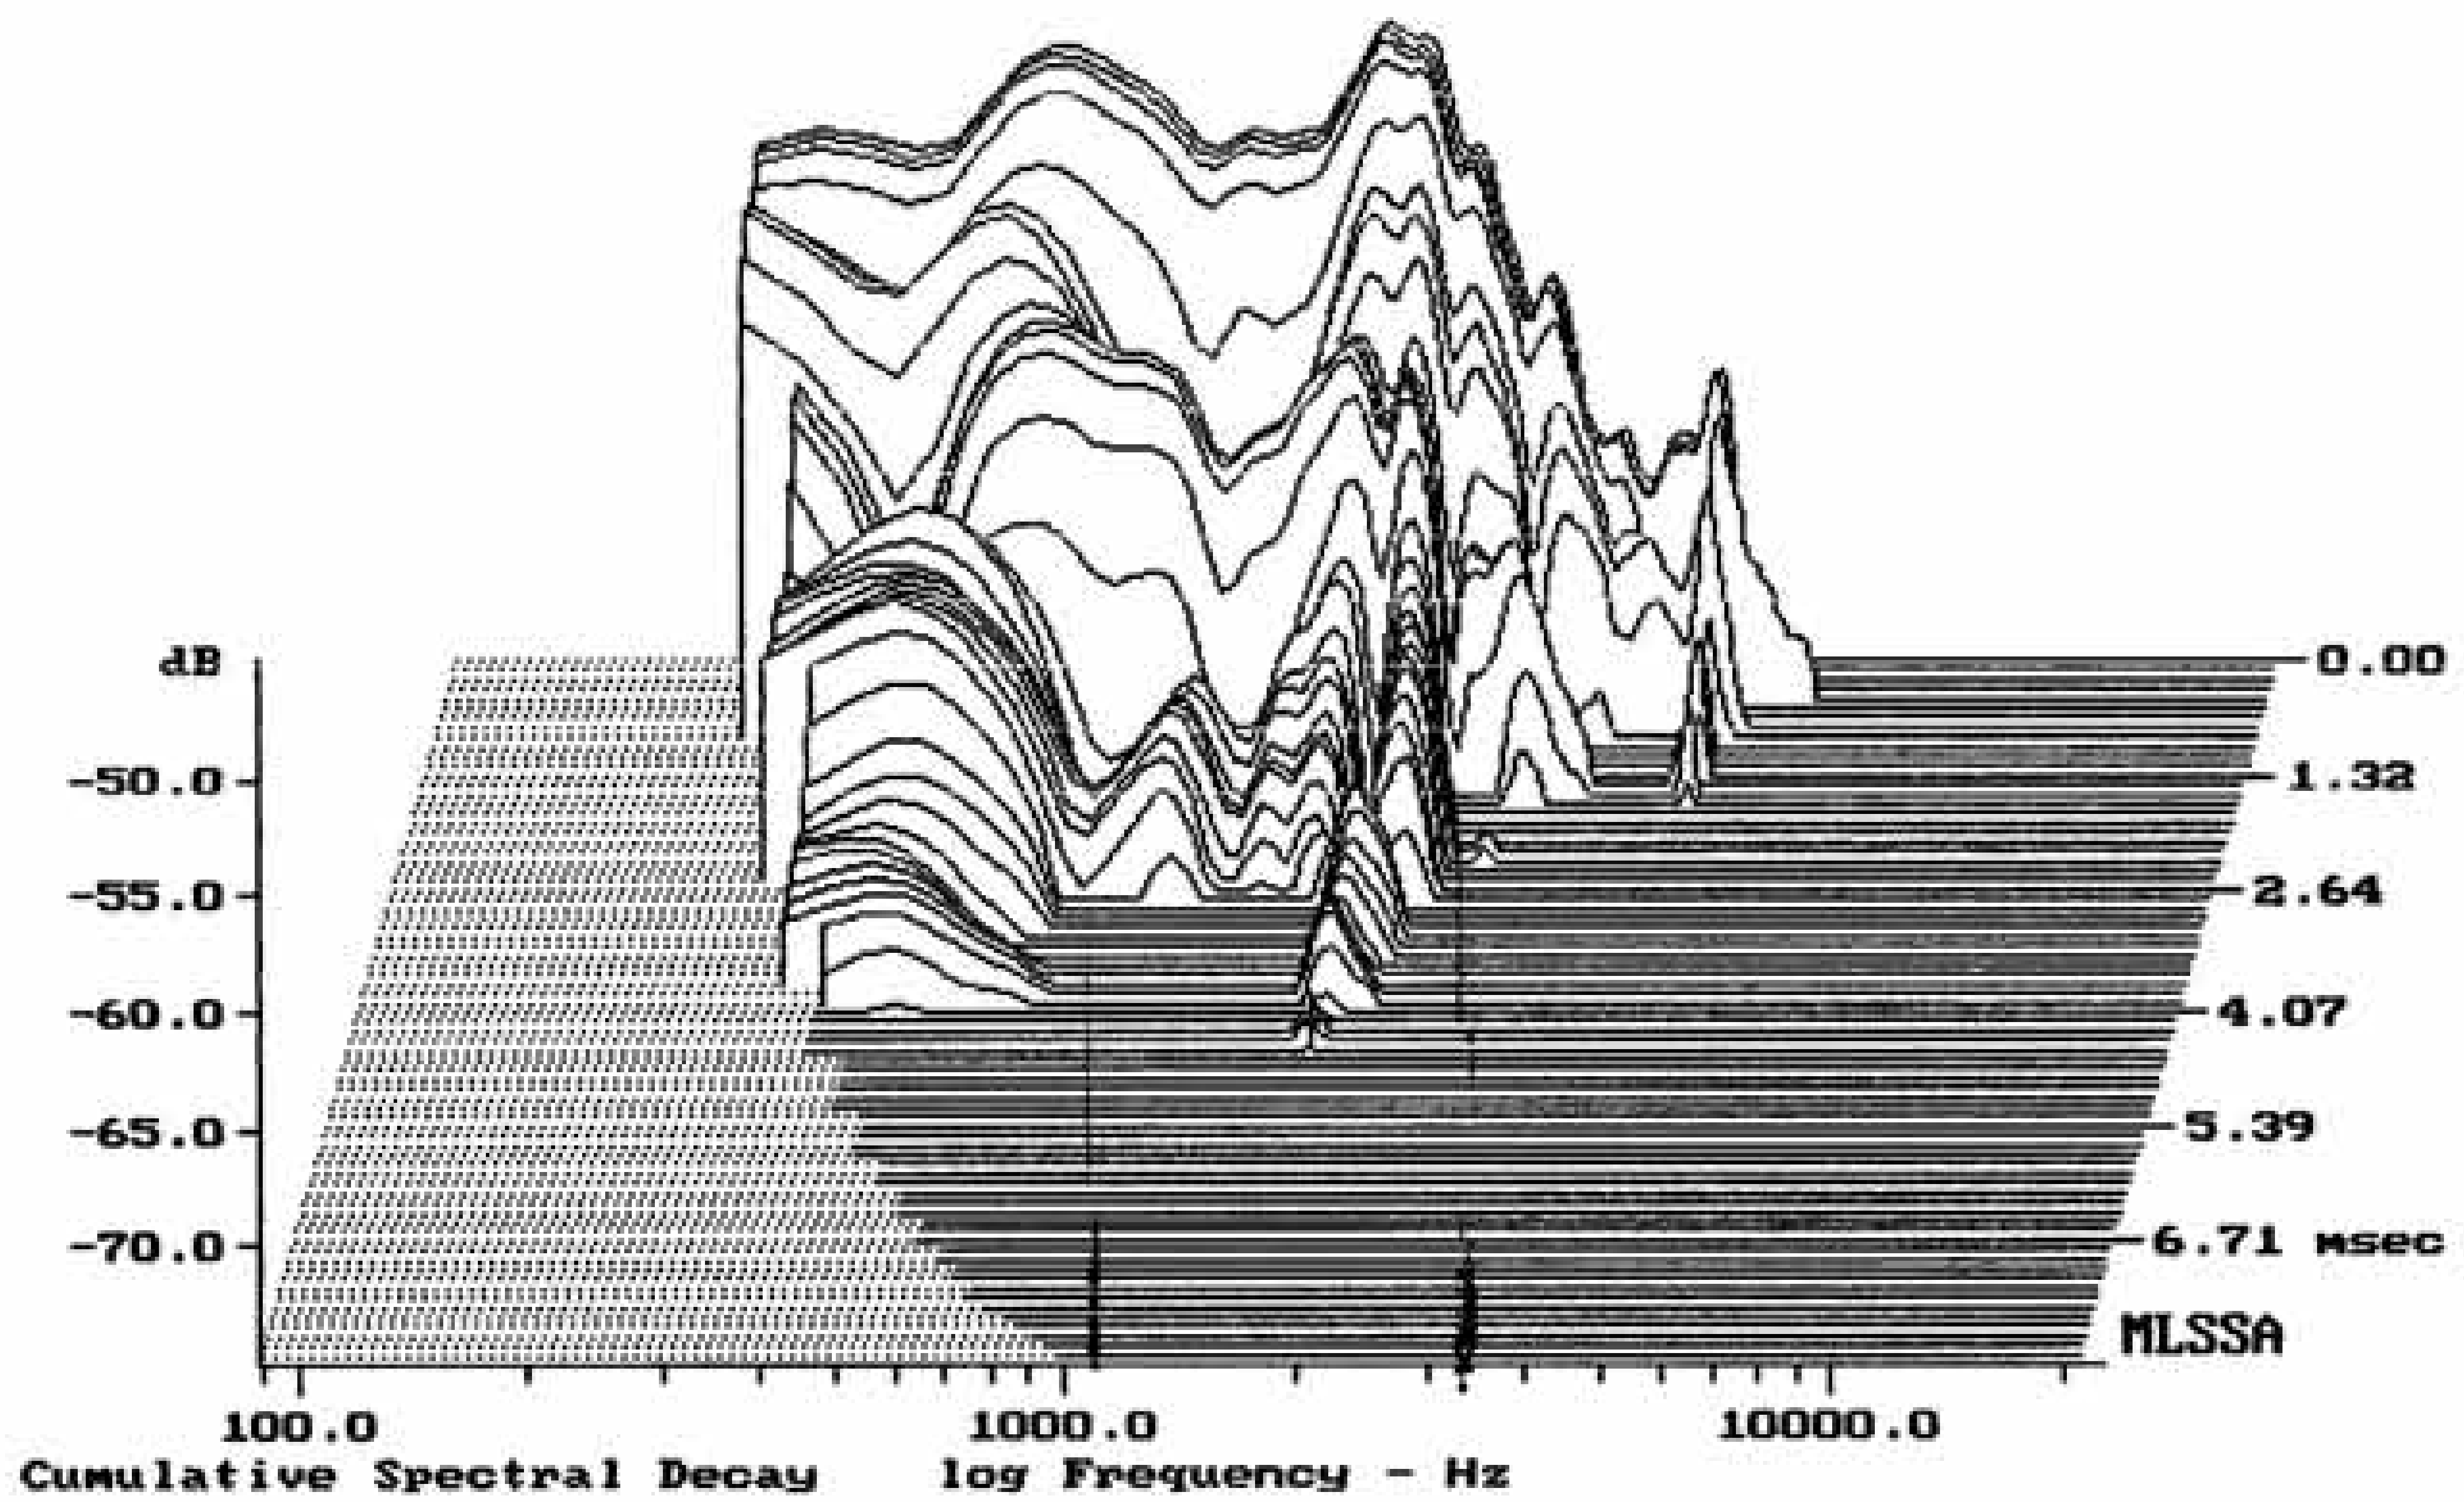

-74.18 dB, 1598 Hz (36), 4.400 msec (41)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.63	Ohms
2	Fs	43.54	Hz
3	Re	5.20	Ohms[dc]
4	Res	49.32	Ohms
5	Qms	3.77	
6	Qes	0.40	
7	Qts	0.36	
8	L1	0.92	mH
9	L2	1.55	mH
10	R2	7.05	Ohms
11	RMSE-load	0.62	Ohms
12	Vas(Sd)	157.64	liters
13	Mms	92.48	grams
14	Cms	144	$\mu\text{M}/\text{Newton}$
15	B1	18.18	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.8% (-20% to -50% is recommended).

DAS 15GNR

MLSSA: Parameters

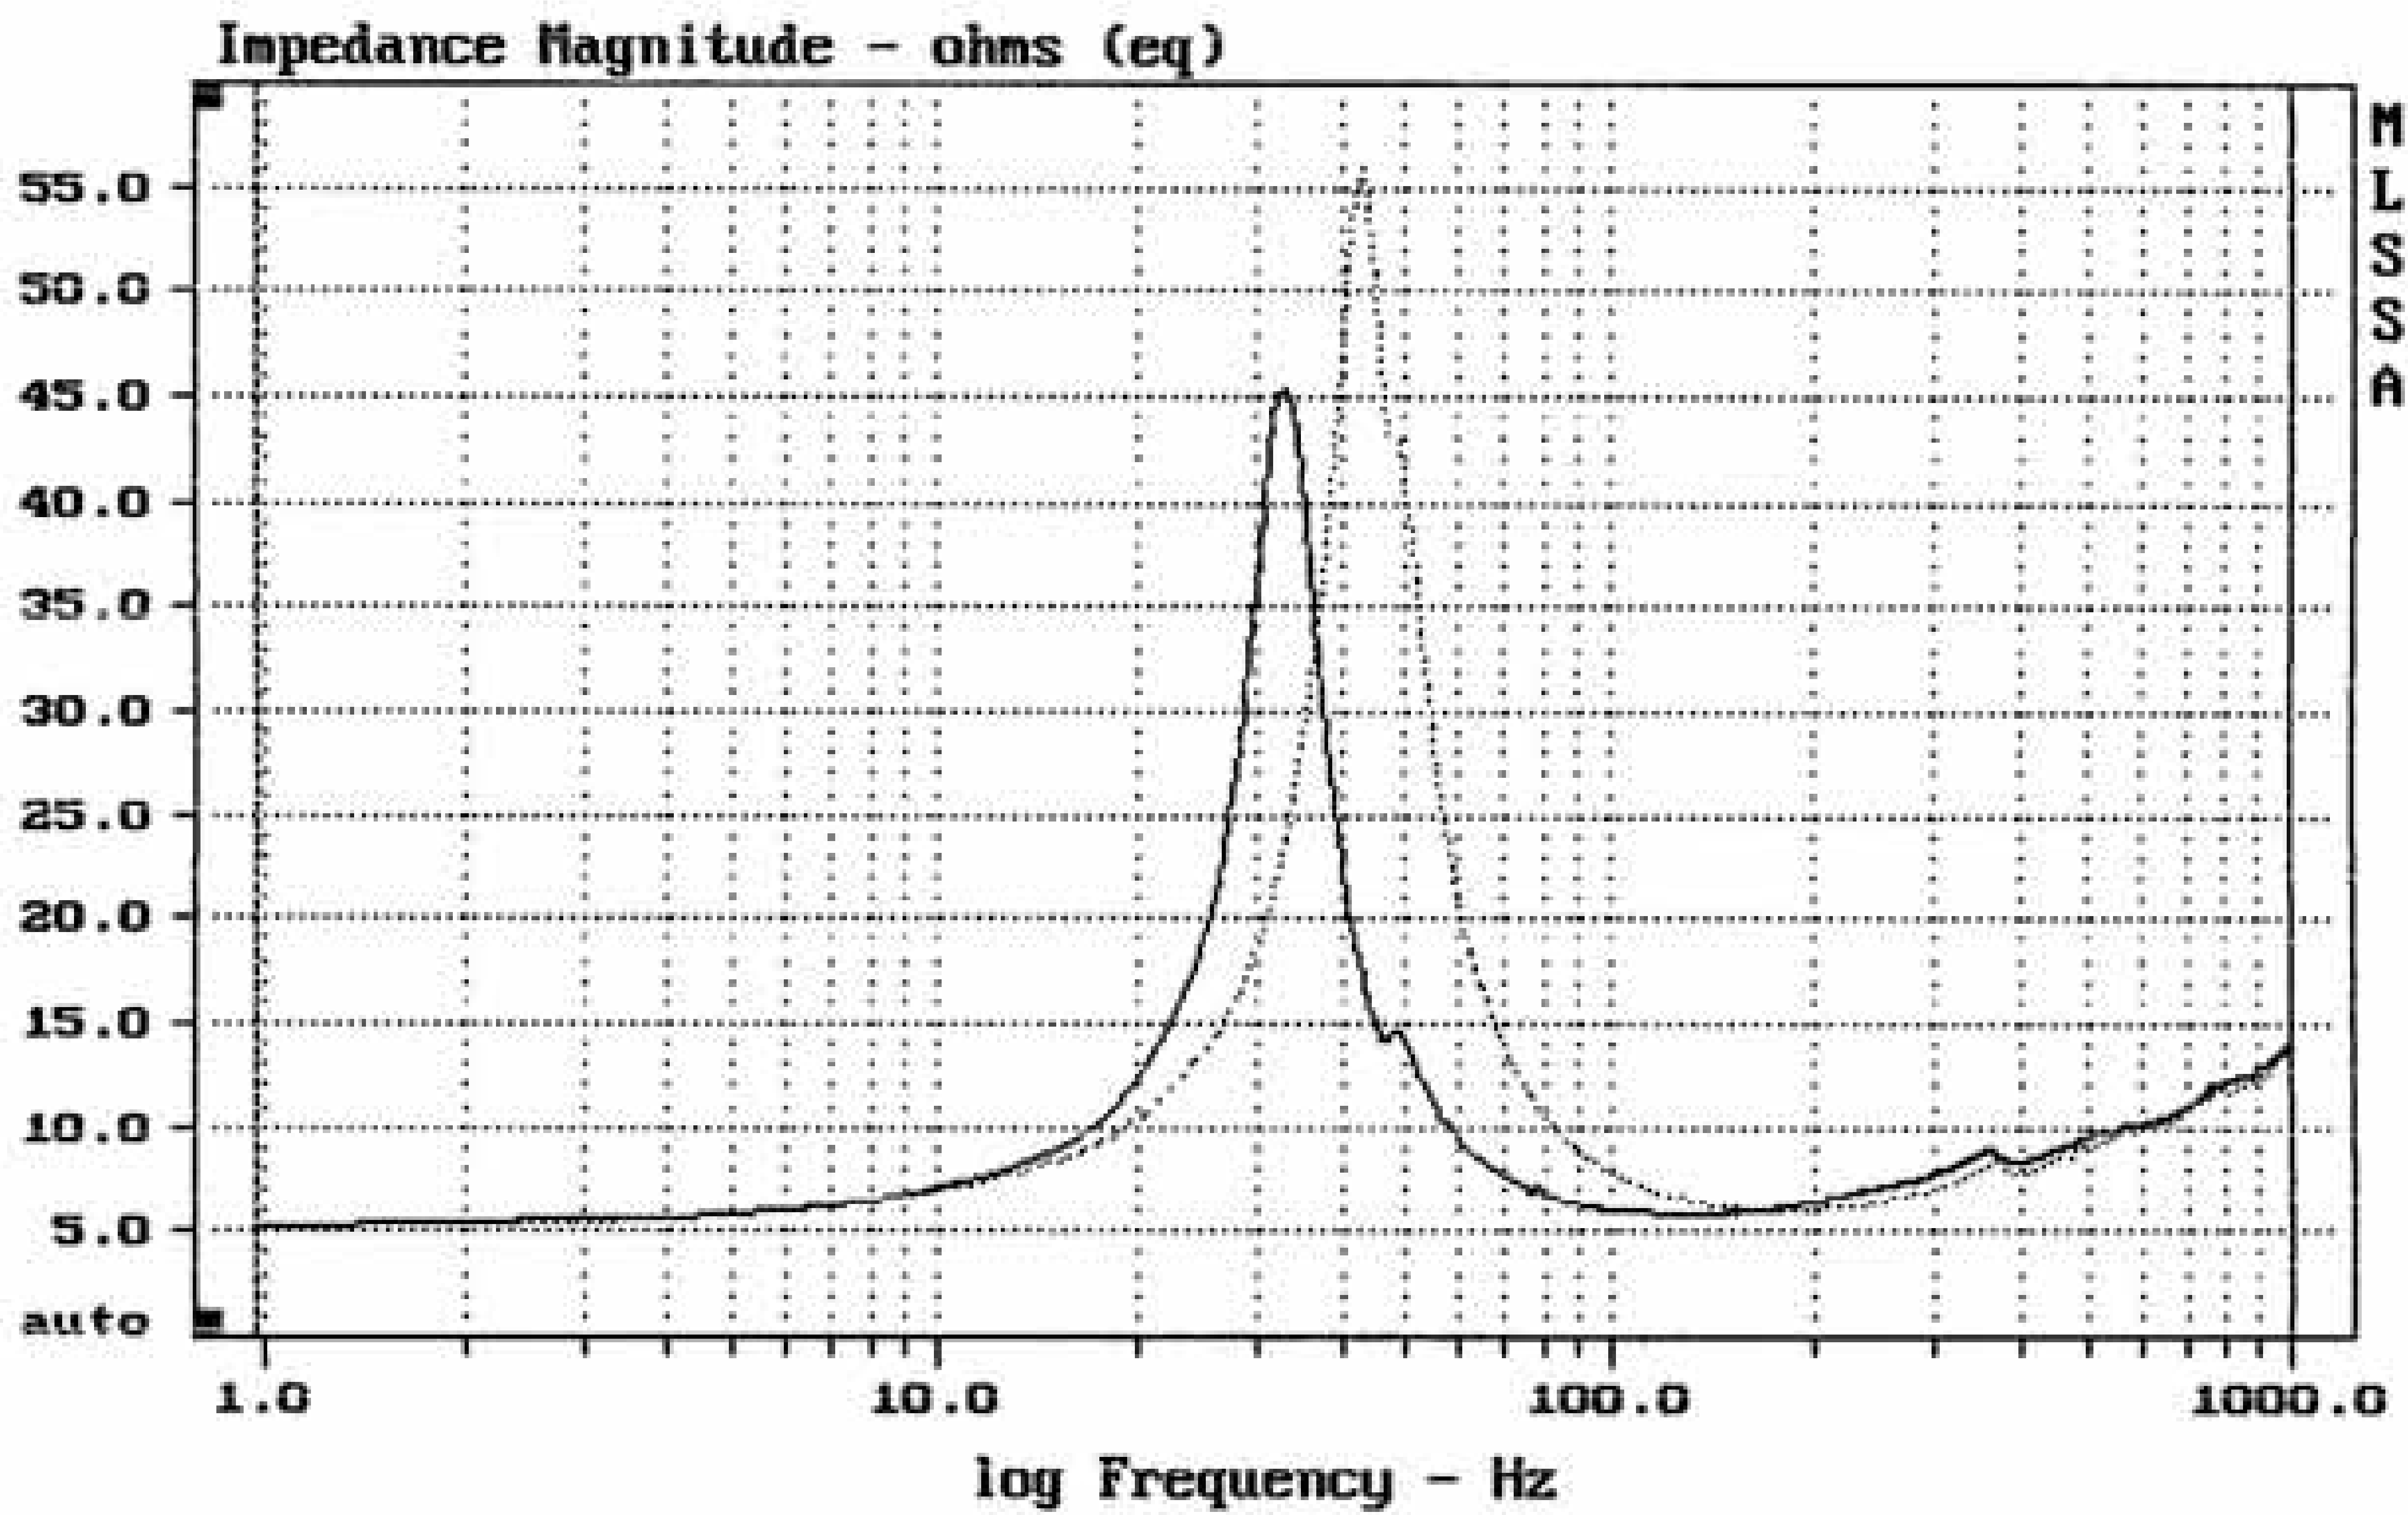

mean: 10.38, rms: 11.72, std: 5.435, max: 55.89, min: 5.275

DTTO

MLSSA: Frequency Domain