


Level (100:1898 Hz) = 95.64 dB SPL/watt (8 ohms, @1.50 meters)

DAS 15LXN

MLSSA: Frequency Domain

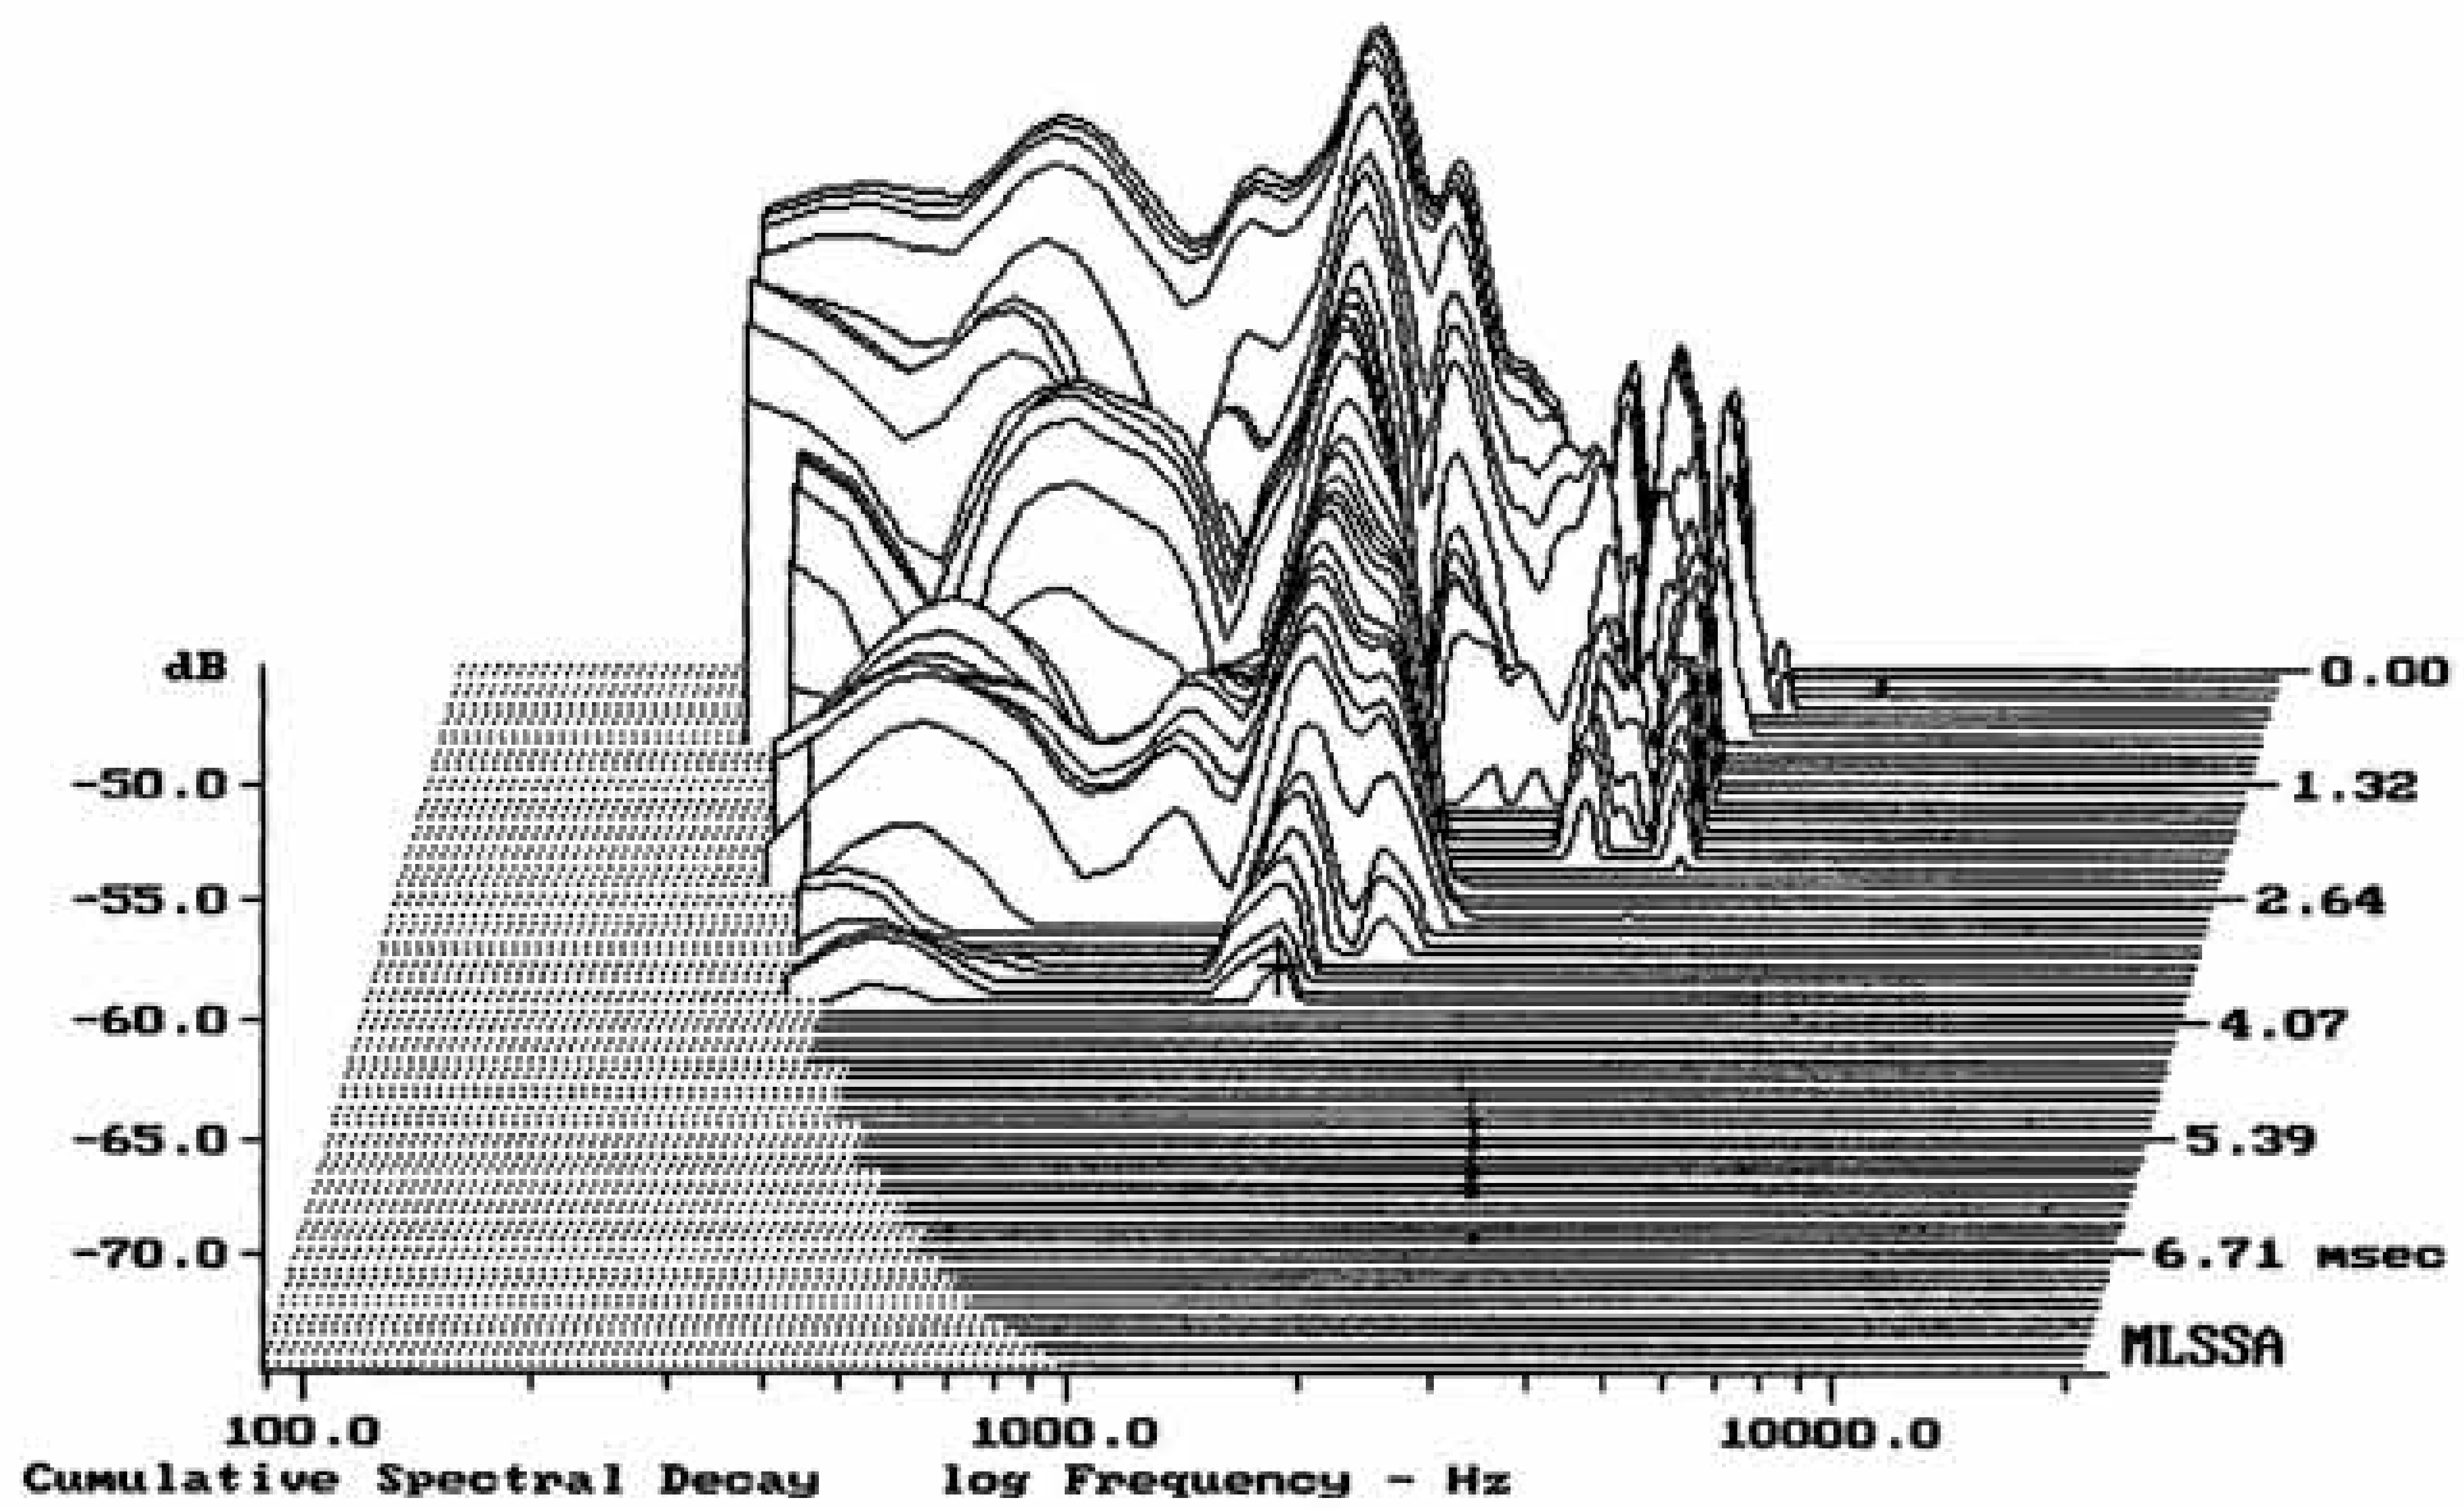

-73.50 dB, 1376 Hz (31), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.96	Ohms
2	Fs	44.75	Hz
3	Re	6.26	Ohms[dc]
4	Res	47.98	Ohms
5	Qms	3.73	
6	Qes	0.49	
7	Qts	0.43	
8	L1	1.03	mH
9	L2	1.70	mH
10	R2	9.83	Ohms
11	RMSE-load	0.80	Ohms
12	Vas(Sd)	129.37	liters
13	Mms	106.68	grams
14	Cms	119	$\mu\text{M}/\text{Newton}$
15	B1	19.65	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.06	

Method: Mass-loaded (140.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).

DAS 15LXN

MLSSA: Parameters

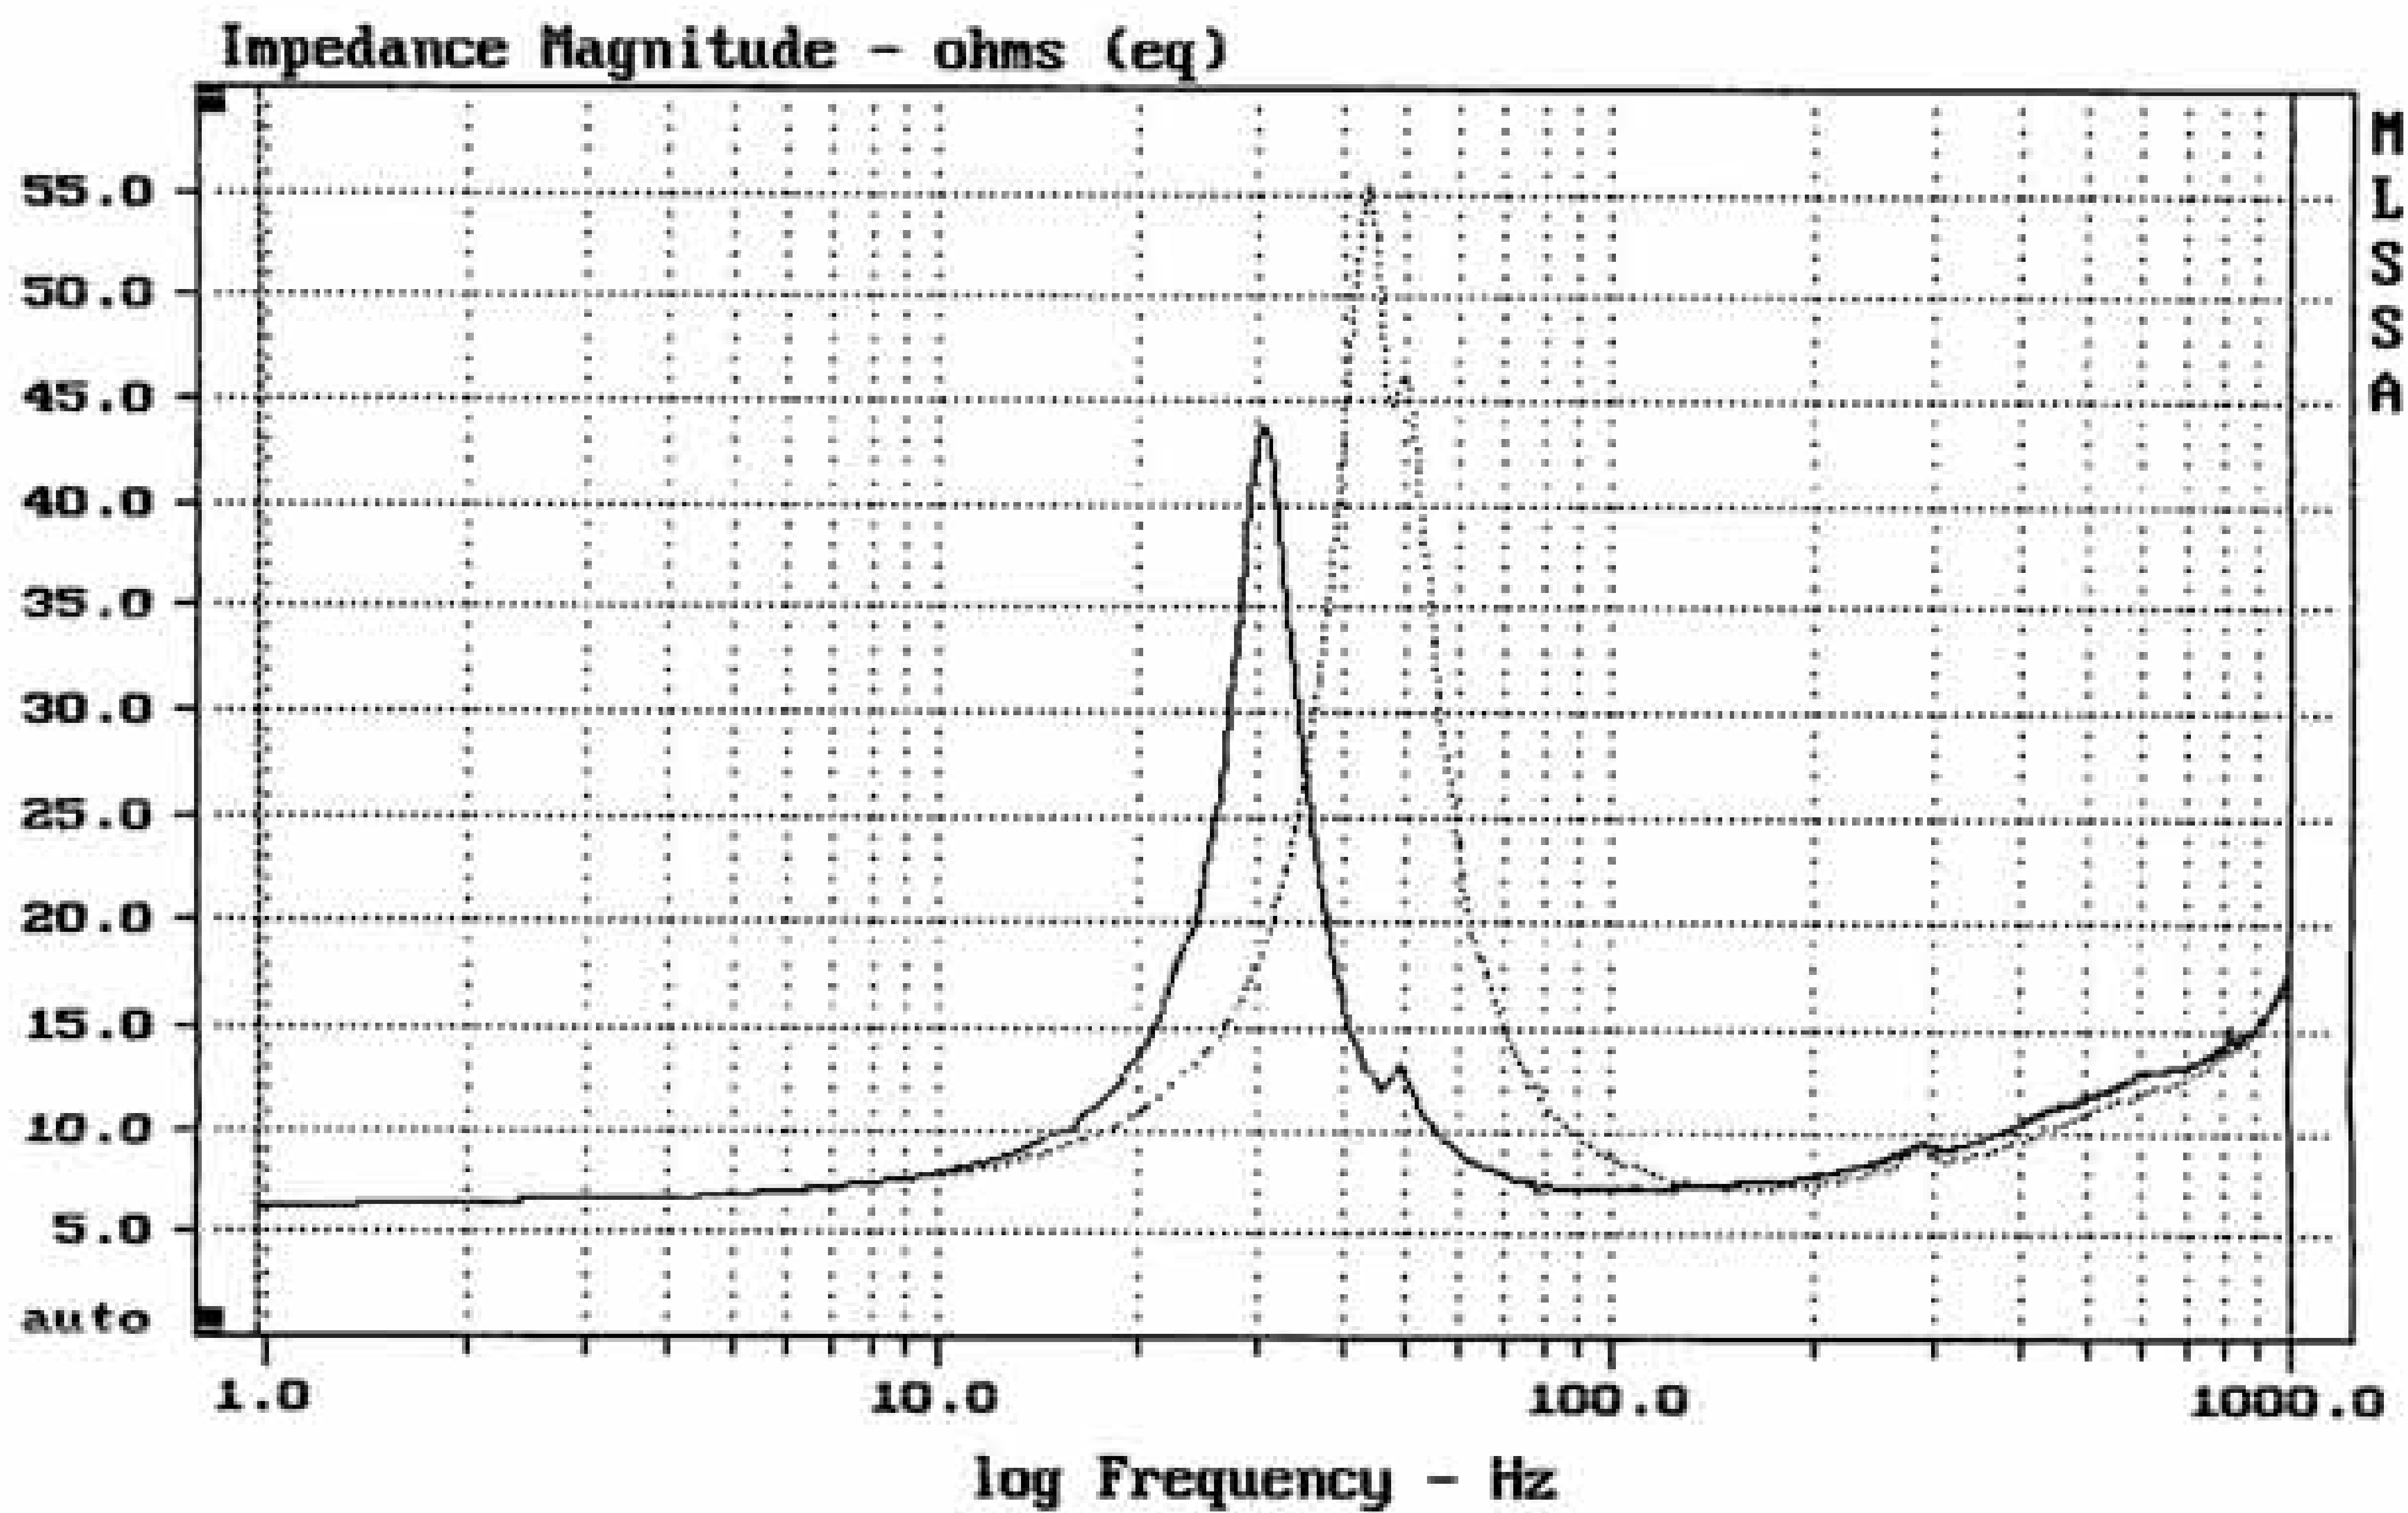

mean: 12.16, rms: 13.33, std: 5.459, max: 55.23, min: 6.323

DITO

MLSSA: Frequency Domain