


Level (100:2020 Hz) = 95.57 dB SPL/watt (8 ohms, @1.50 meters)

DAS 15H

MLSSA: Frequency Domain

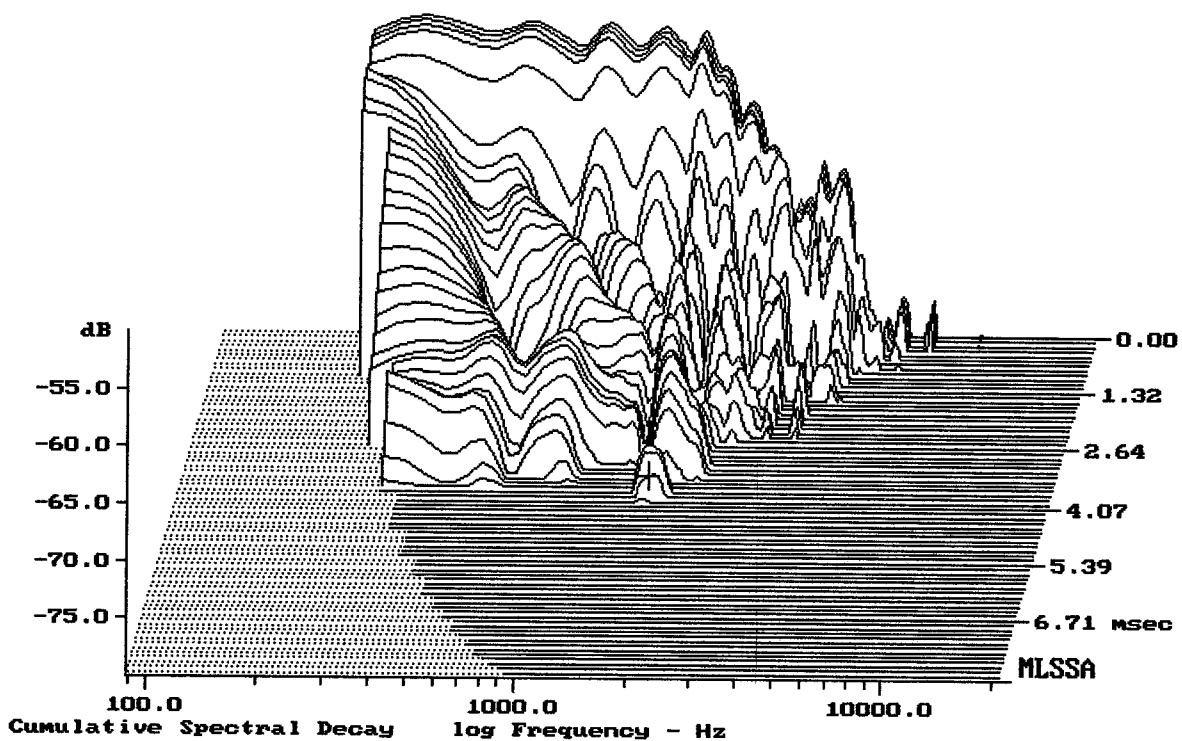

-78.13 dB, 1687 Hz (38), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	41.88	Hz
3	Re	5.91	Ohms[dc]
4	Res	139.40	Ohms
5	Qms	8.92	
6	Qes	0.38	
7	Qts	0.36	
8	L1	1.00	mH
9	L2	1.60	mH
10	R2	10.79	Ohms
11	RMSE-load	0.90	Ohms
12	Vas(Sd)	138.99	liters
13	Mms	106.74	grams
14	Cms	135	$\mu\text{M}/\text{Newton}$
15	B1	20.95	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.9% (-20% to -50% is recommended).

DAS 15H

MLSSA: Parameters

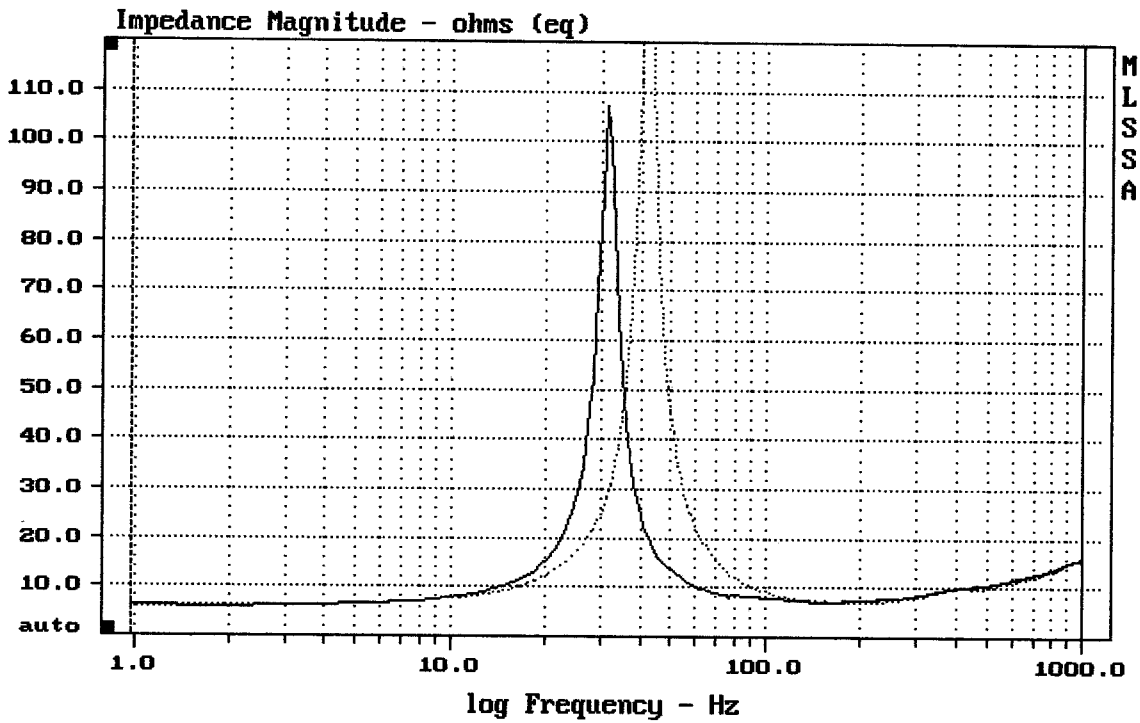

Concurrent pre-average 1 cycles

DTT0

MLSSA: Frequency Domain