


Level (100:3496 Hz) = 99.09 dB SPL/watt (8 ohms, @1.50 meters)

DAS 15HM

MLSSA: Frequency Domain

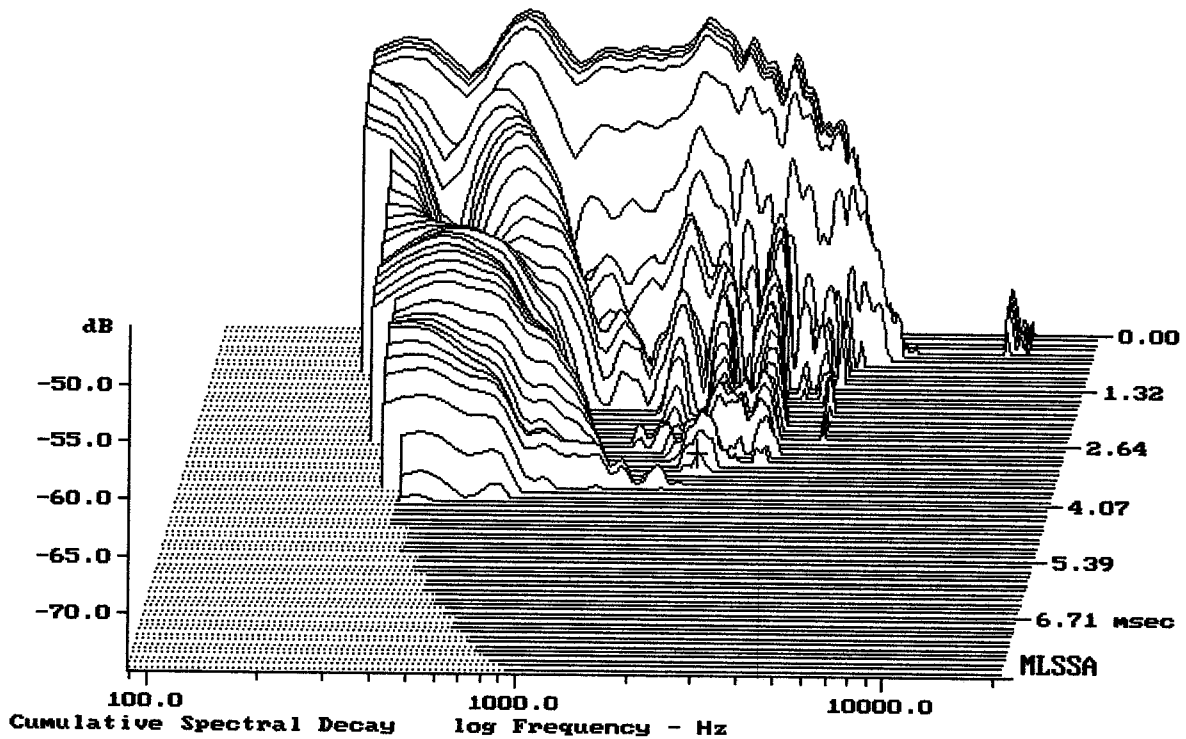

-73.43 dB, 2175 Hz (49), 3.300 msec (31)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	48.41	Hz
3	Re	5.28	Ohms[dc]
4	Res	126.31	Ohms
5	Qms	8.08	
6	Qes	0.34	
7	Qts	0.32	
8	L1	0.79	mH
9	L2	1.37	mH
10	R2	4.88	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	138.96	liters
13	Mms	79.91	grams
14	Cms	135	$\mu\text{M}/\text{Newton}$
15	Bl	19.50	Tesla-M
16	SPLref(Sd)	98.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.9% (-20% to -50% is recommended).

DAS 15HM

MLSSA: Parameters

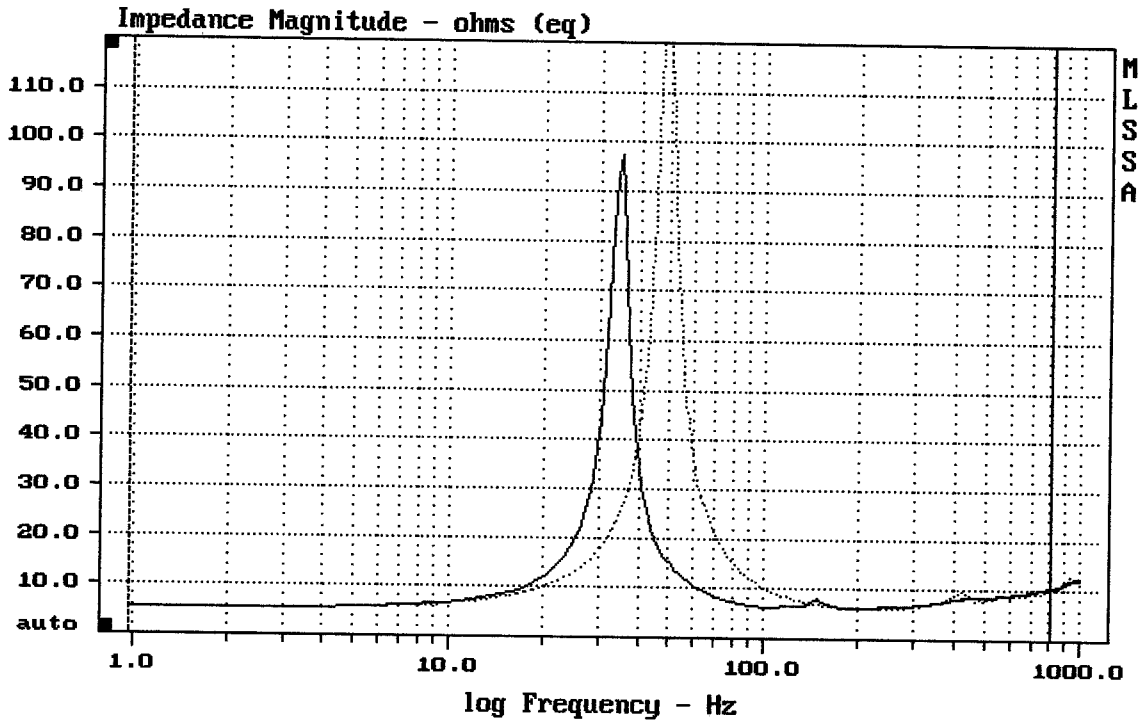

mean: 10.52, rms: 15.92, std: 11.94, max: 128.9, min: 5.371

DTTO

MLSSA: Frequency Domain