


Level (100:5005 Hz) = 100.12 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 15LM

MLSSA: Frequency Domain

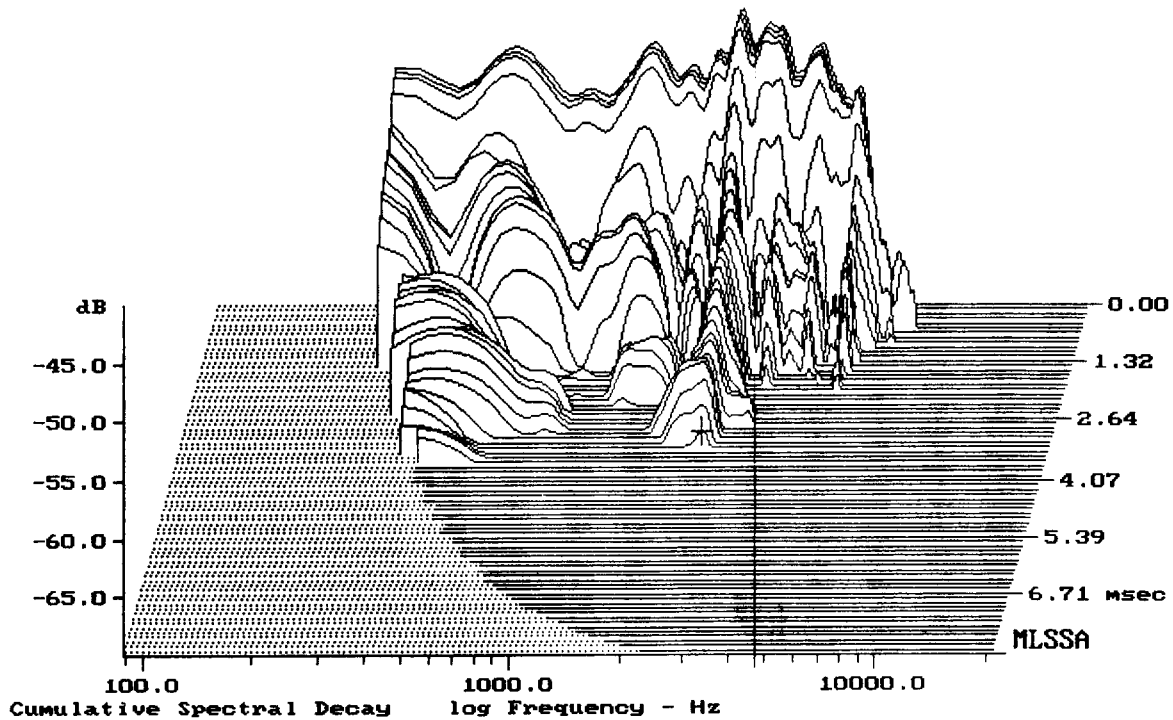

-68.55 dB, 2353 Hz (53), 3.300 msec (31)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	47.26	Hz
3	Re	4.72	Ohms[dc]
4	Res	82.13	Ohms
5	Qms	7.03	
6	Qes	0.40	
7	Qts	0.38	
8	L1	0.71	mH
9	L2	1.09	mH
10	R2	3.48	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	188.84	liters
13	Mms	61.71	grams
14	Cms	184	$\mu\text{M}/\text{Newton}$
15	B1	14.63	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.9% (-20% to -50% is recommended).

D.A.S. 15LM

MLSSA: Parameters

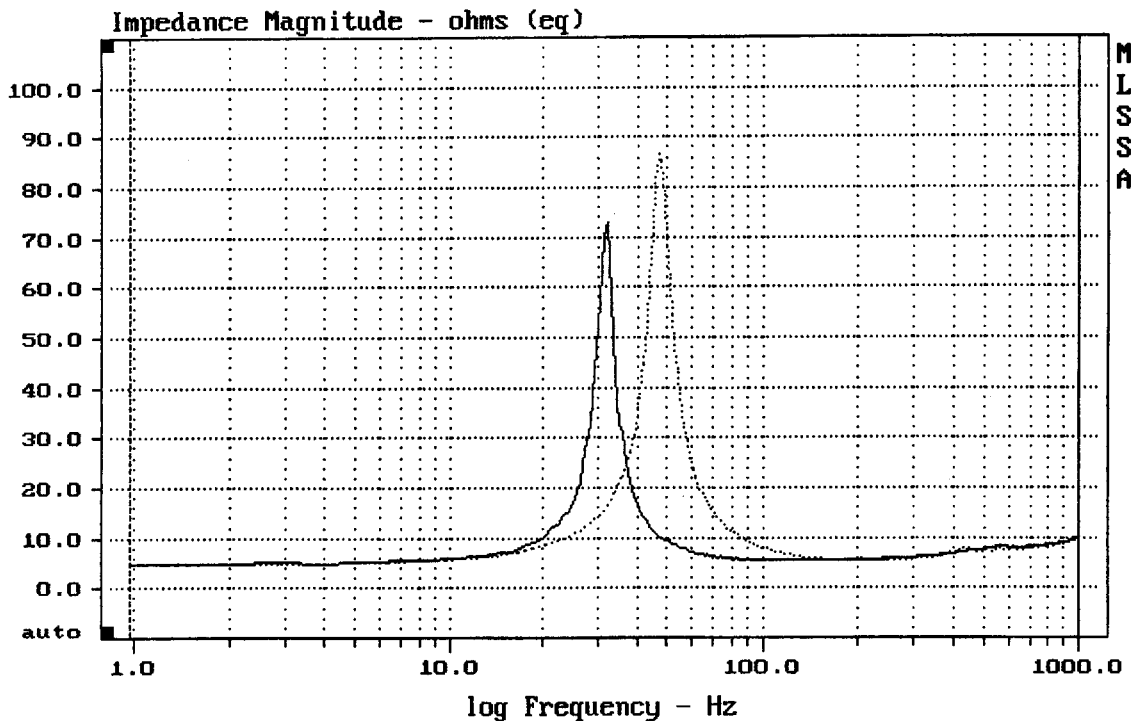

CURSOR: dy = 0.113441 x = 1000.9766 (1025)

D.A.S. 15LM

MLSSA: Frequency Domain