


Level (55:1998 Hz) = 95.44 dB SPL/watt (8 ohms, @1.50 meters)

DAS 18LXN

MLSSA: Frequency Domain

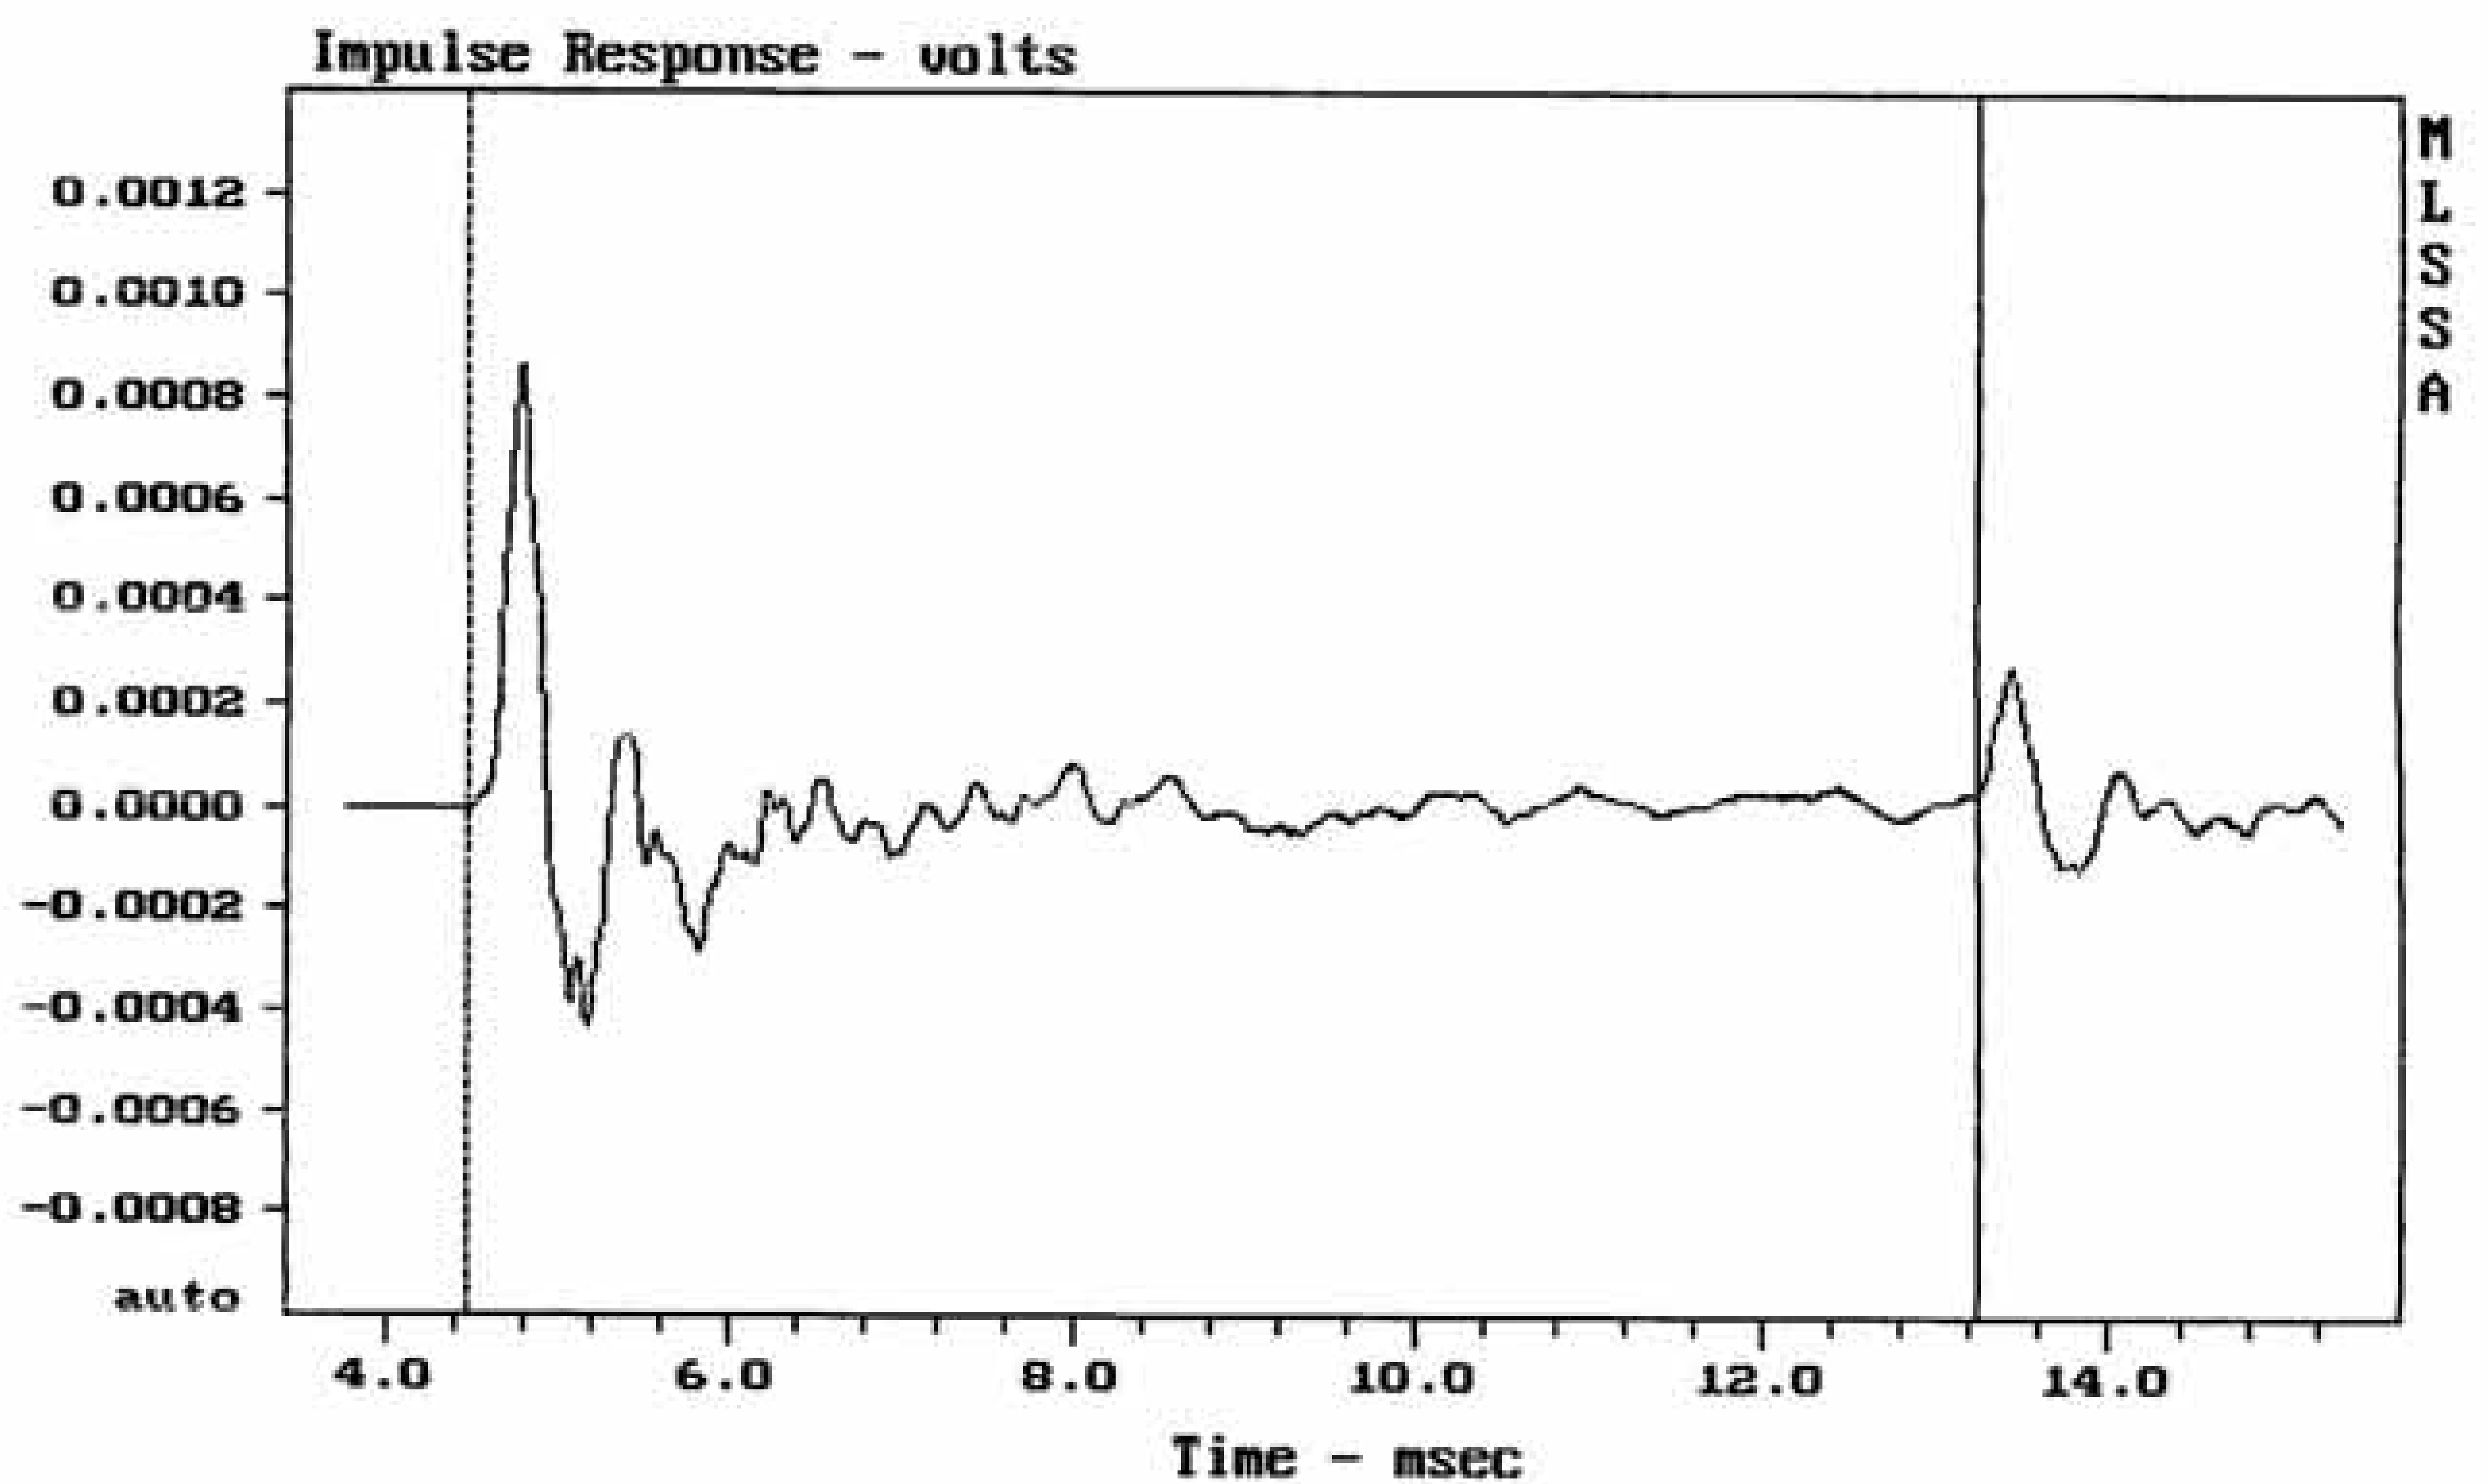

mean: -9.819e-008, rms: 0.0001296, std: 0.0001296, max: 0.0008599, min: -0.000

DAS 18LXN

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	51.43	Hz
3	Re	6.44	Ohms[dc]
4	Res	46.35	Ohms
5	Qms	4.99	
6	Qes	0.69	
7	Qts	0.61	
8	L1	1.29	mH
9	L2	1.84	mH
10	R2	6.89	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	133.26	liters
13	Mms	129.81	grams
14	Cms	74	$\mu\text{M}/\text{Newton}$
15	B1	19.73	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.9% (-20% to -50% is recommended).

DAS 18LXN

MLSSA: Parameters

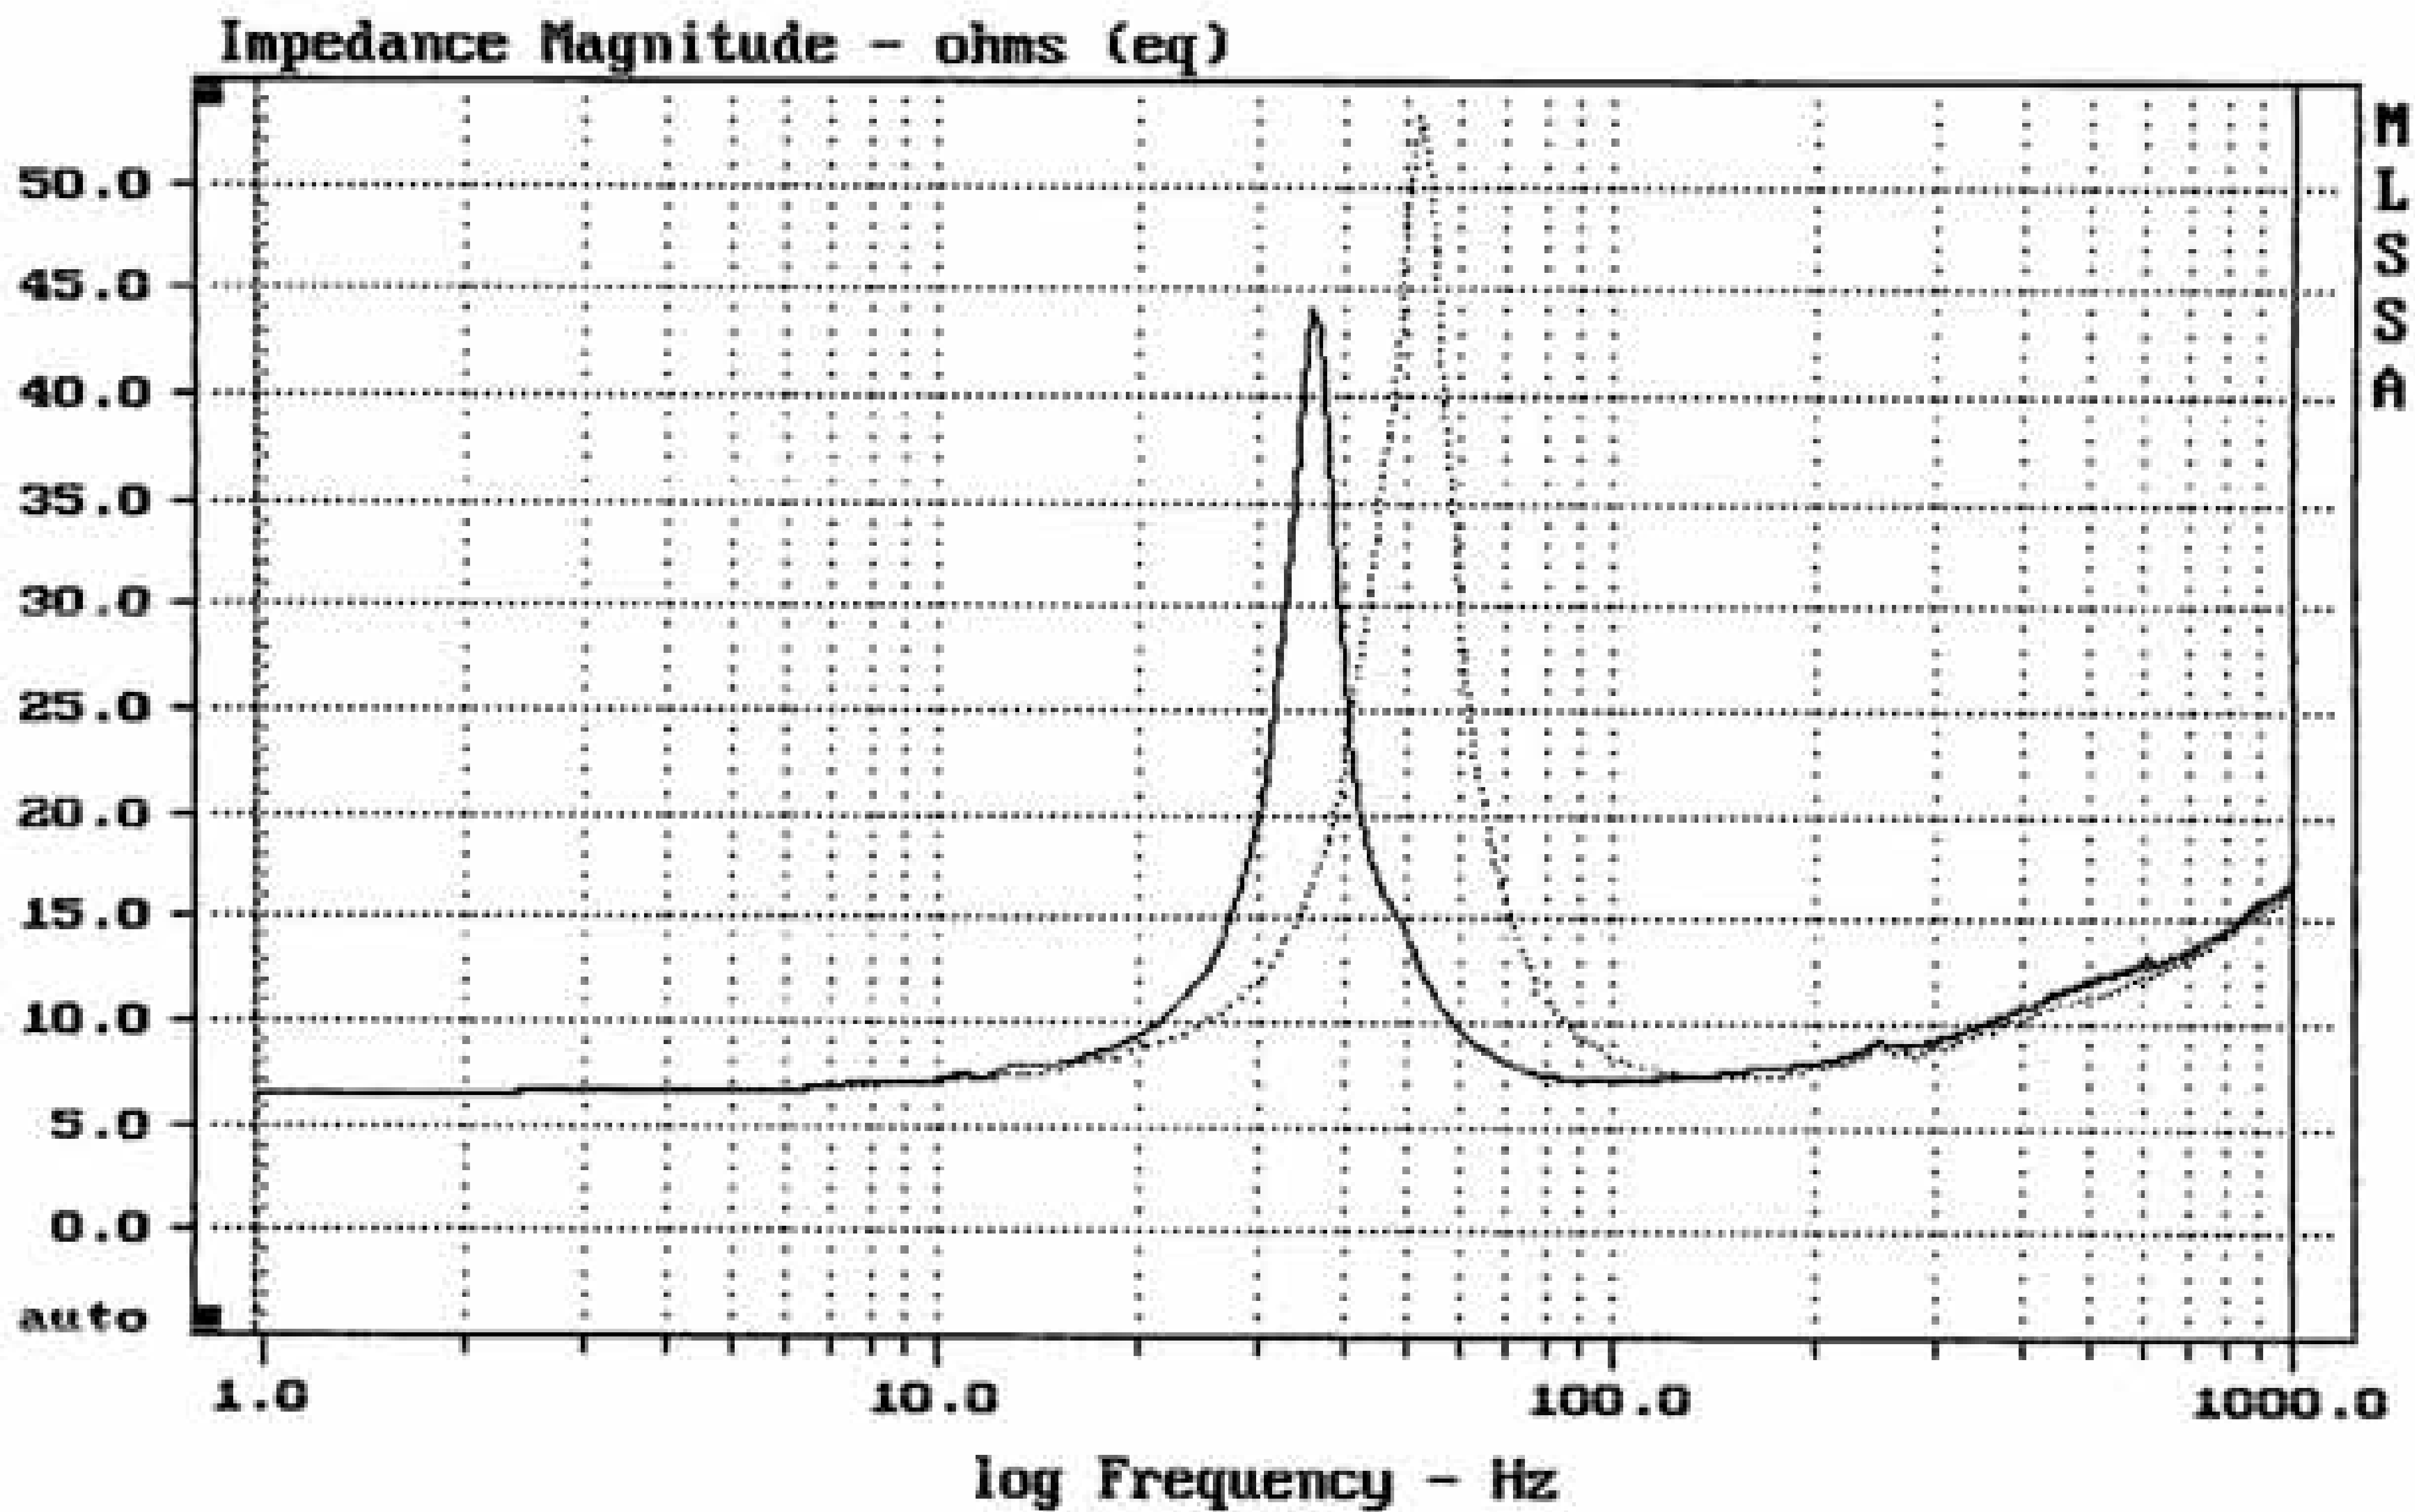

mean: 12.26, rms: 13.22, std: 4.956, max: 53.34, min: 6.487

DTTO

MLSSA: Frequency Domain