

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.81	Ohms
2	Fs	53.63	Hz
3	Re	5.87	Ohms[dc]
4	Res	118.35	Ohms
5	Qms	6.20	
6	Qes	0.31	
7	Qts	0.29	
8	L1	1.07	mH
9	L2	1.60	mH
10	R2	4.58	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	48.77	liters
13	Mms	71.50	grams
14	Cms	123	$\mu\text{M}/\text{Newton}$
15	B1	21.44	Tesla-M
16	SPLref(Sd)	95.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.5% (-20% to -50% is recommended).

D.A.S. 12-G


MLSSA: Parameters

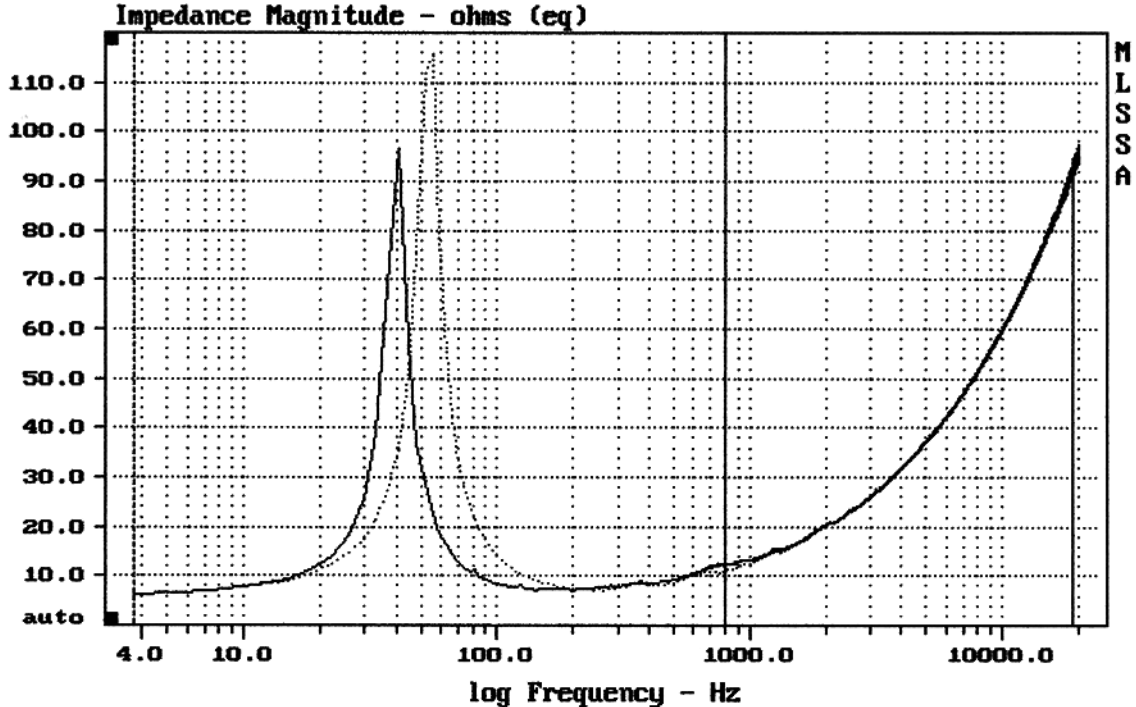

CURSOR: dy = -1.47371 x = 799.0057 (216)

DTTO


MLSSA: Frequency Domain

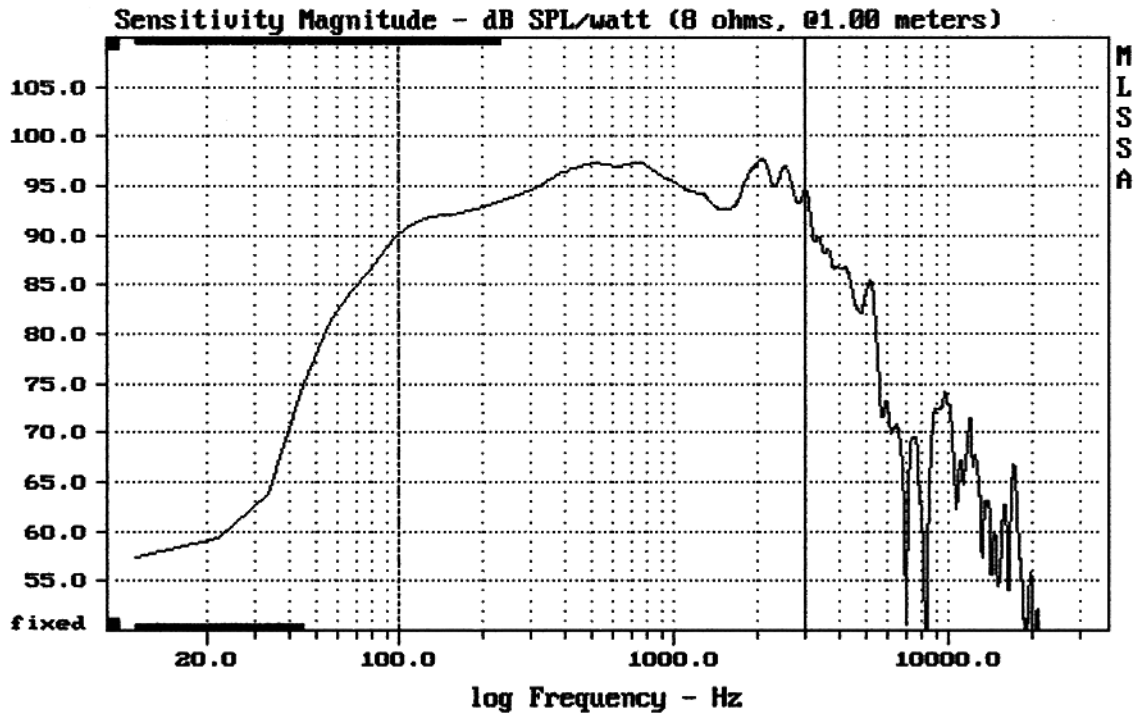

Level (100:3007 Hz) = 95.06 dB SPL/watt (8 ohms, @1.00 meters)

D.A.S. 12G

MLSSA: Frequency Domain

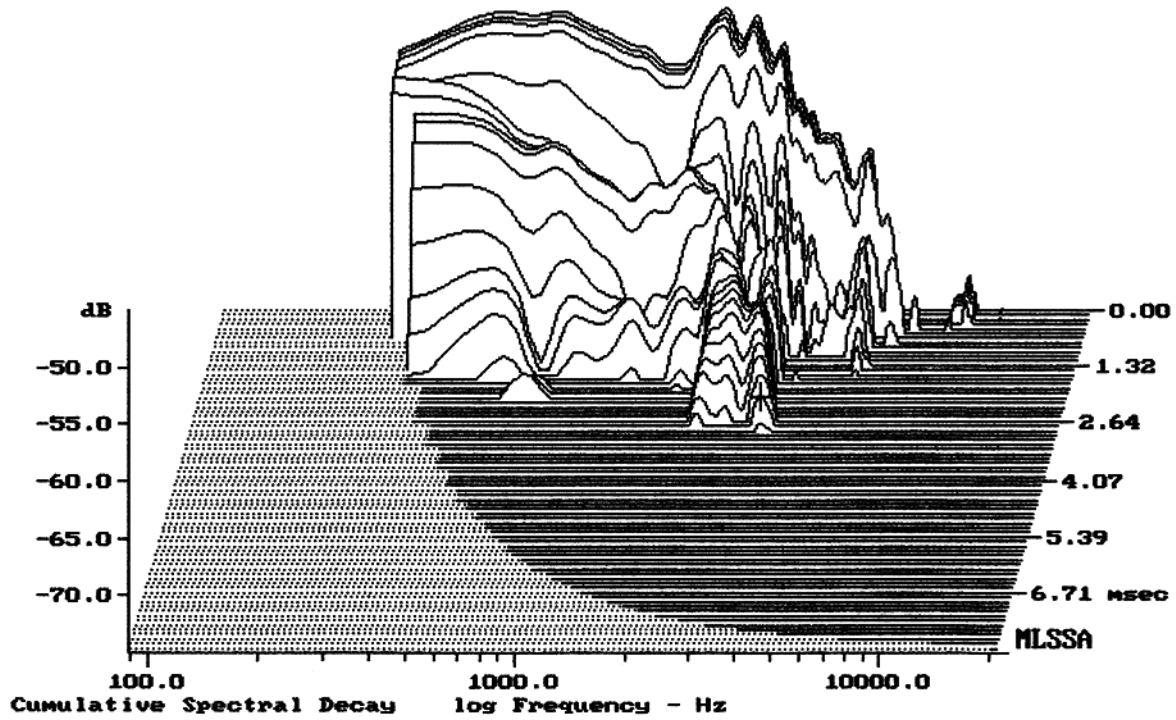

-72.41 dB, 3152 Hz (71), 2.750 msec (26)