

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	49.45	Hz
3	Re	5.97	Ohms[dc]
4	Res	154.76	Ohms
5	Qms	8.93	
6	Qes	0.34	
7	Qts	0.33	
8	L1	0.76	mH
9	L2	0.90	mH
10	R2	4.55	Ohms
11	RMSE-load	0.82	Ohms
12	Vas(Sd)	91.07	liters
13	Mms	45.03	grams
14	Cms	230	$\mu\text{M}/\text{Newton}$
15	Bl	15.57	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.0% (-20% to -50% is recommended).

DAS 12L


MLSSA: Parameters

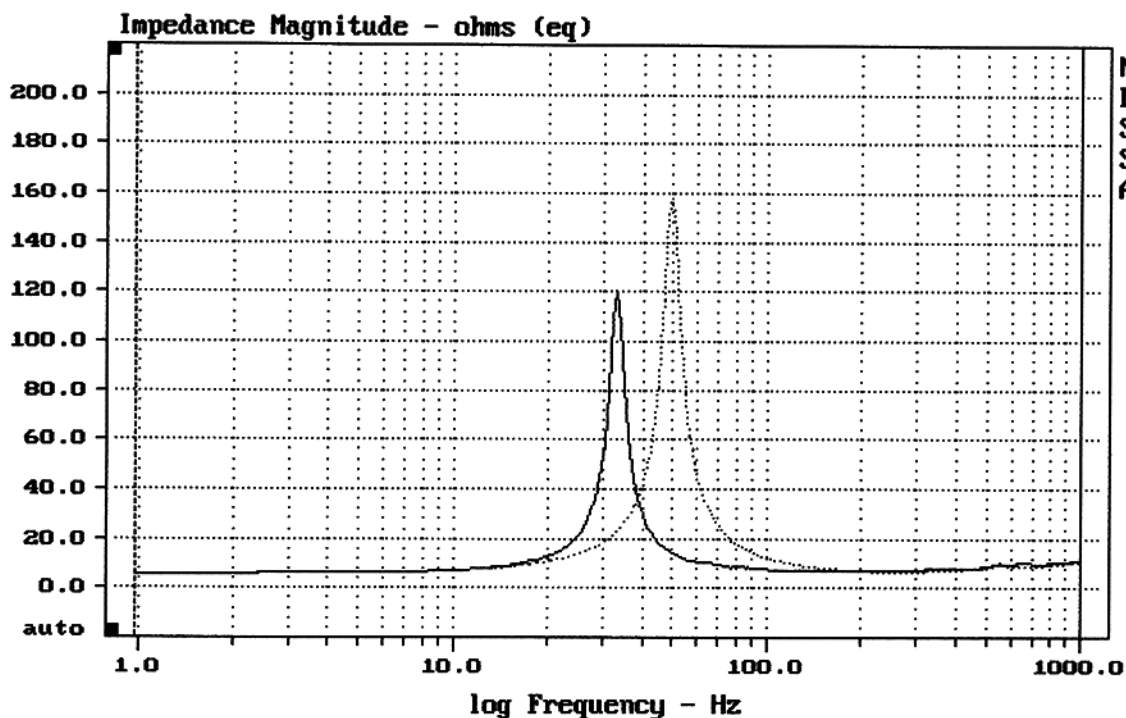

mean: 10.97, rms: 16.94, std: 12.91, max: 158, min: 6.06

DTTO


MLSSA: Frequency Domain

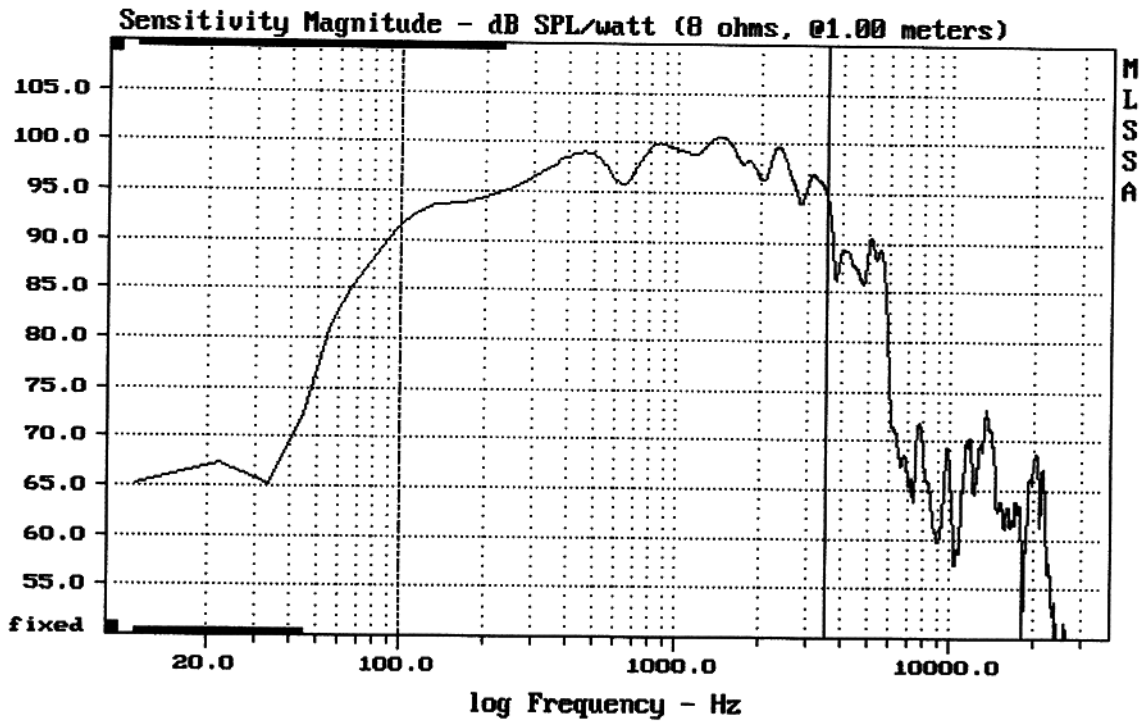

Level (100:3507 Hz) = 97.41 dB SPL/watt (8 ohms, @1.00 meters)

DAS 12L

MLSSA: Frequency Domain

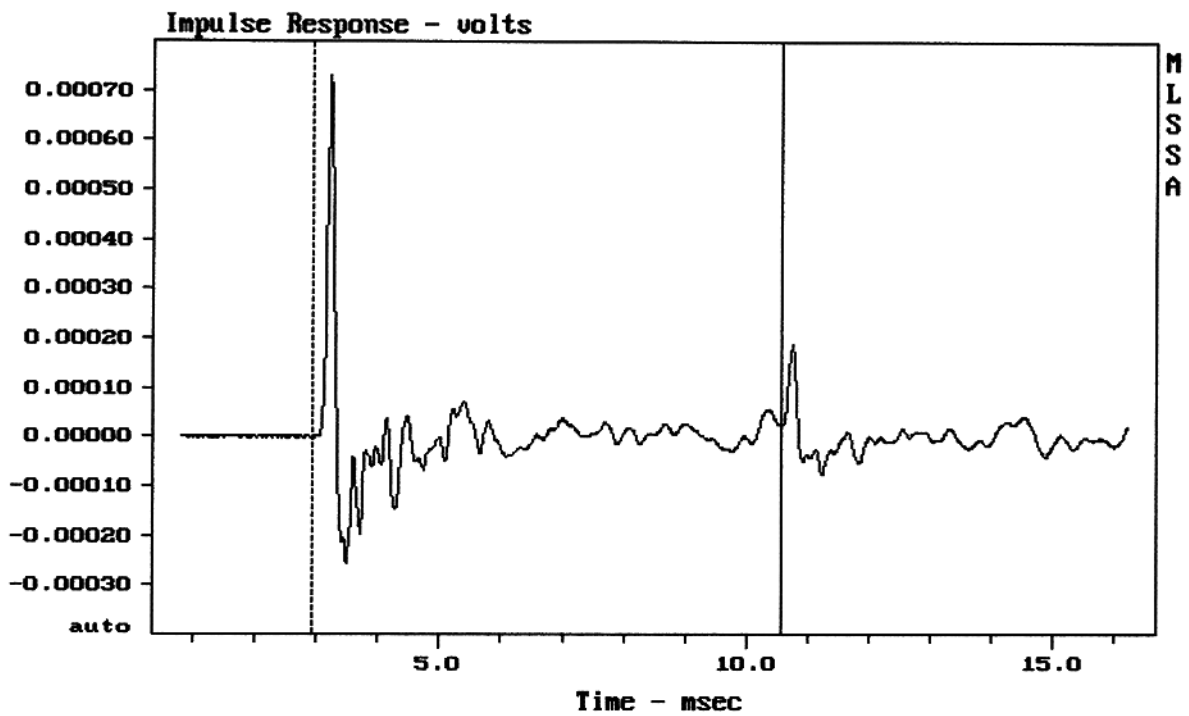

mean: 1.11e-006, rms: 9.319e-005, std: 9.318e-005, max: 0.0007293, min: -0.000

DAS 12L