


Level (100:2996 Hz) = 97.74 dB SPL/watt (8 ohms, @1.50 meters)


D.A.S. 15P

MLSSA: Frequency Domain

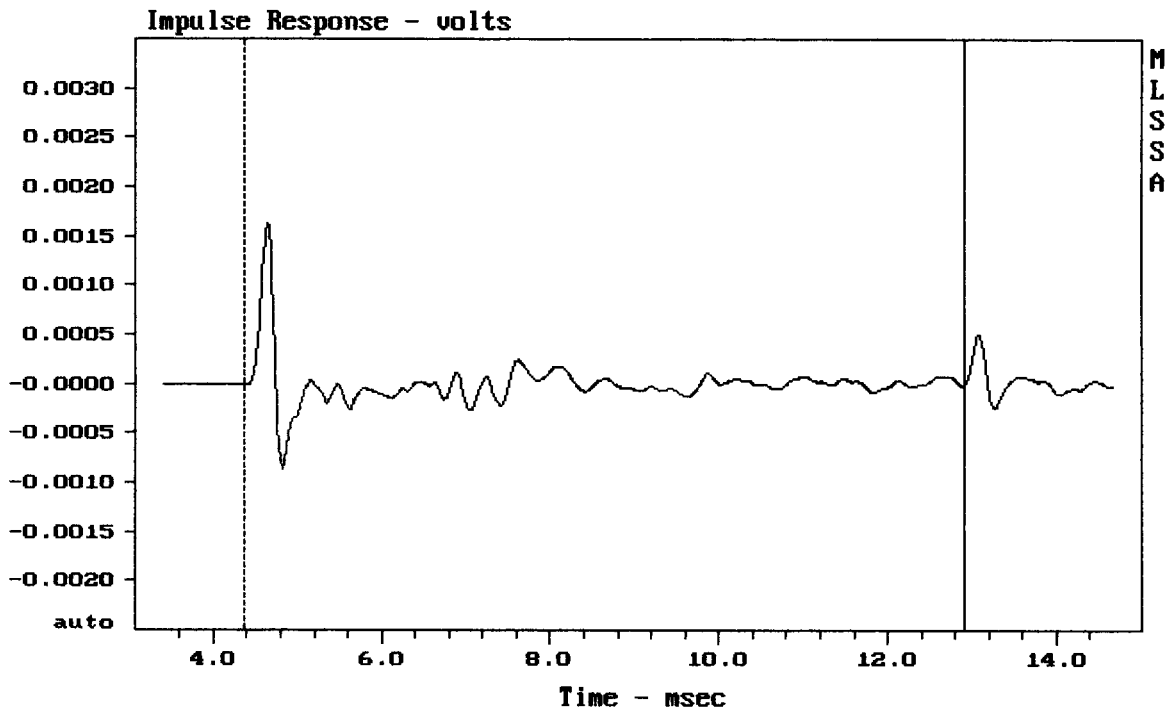

CURSOR: $y = -1.665e-005$ $x = 12.9030$ (1173)


D.A.S. 15P

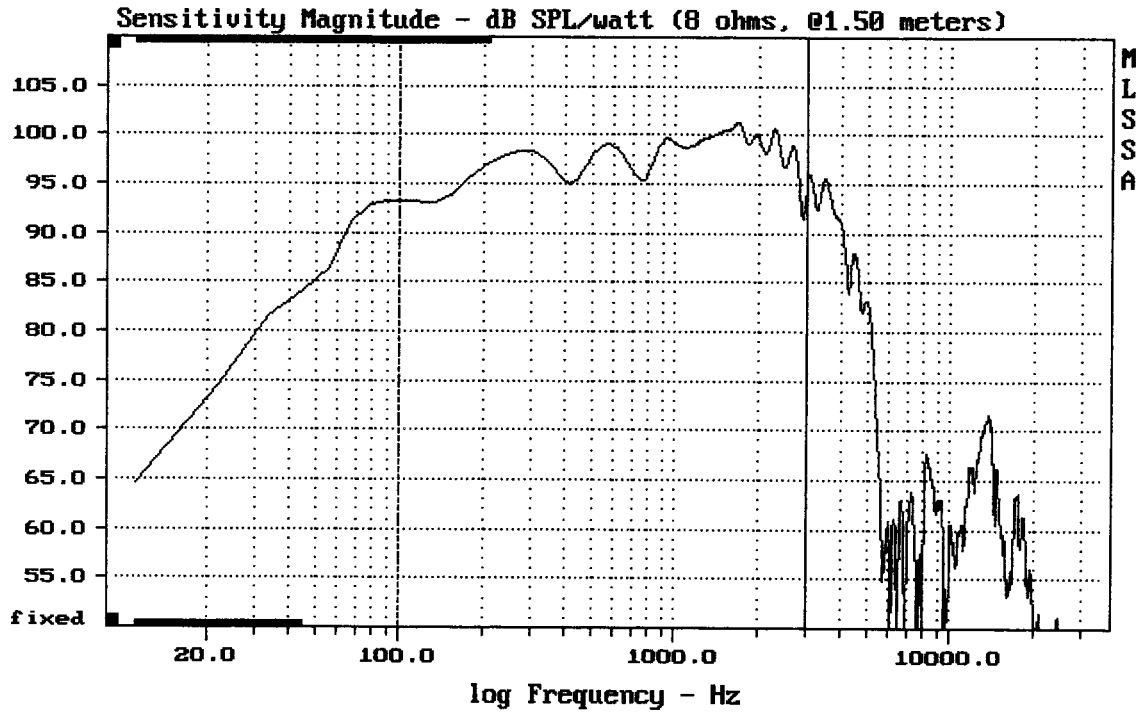

Level (100:2996 Hz) = 97.74 dB SPL/watt (8 ohms, @1.50 meters)


D.A.S. 15P

MLSSA: Frequency Domain

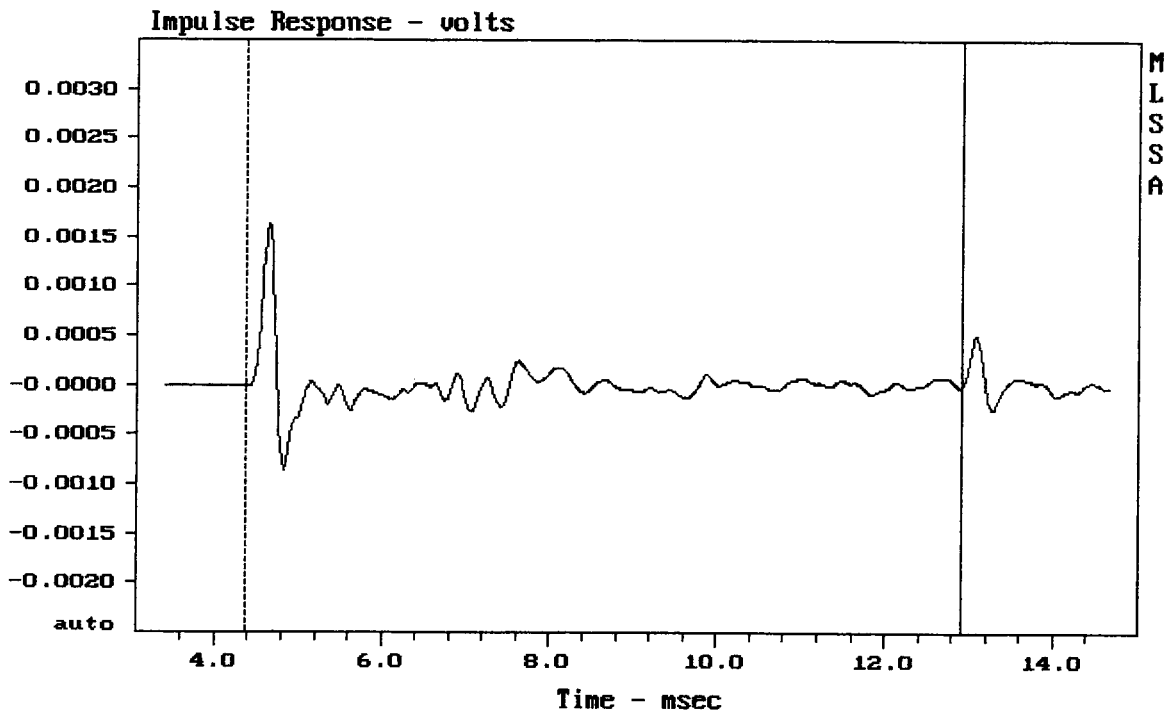

CURSOR: y = -1.665e-005 x = 12.9030 (1173)


D.A.S. 15P

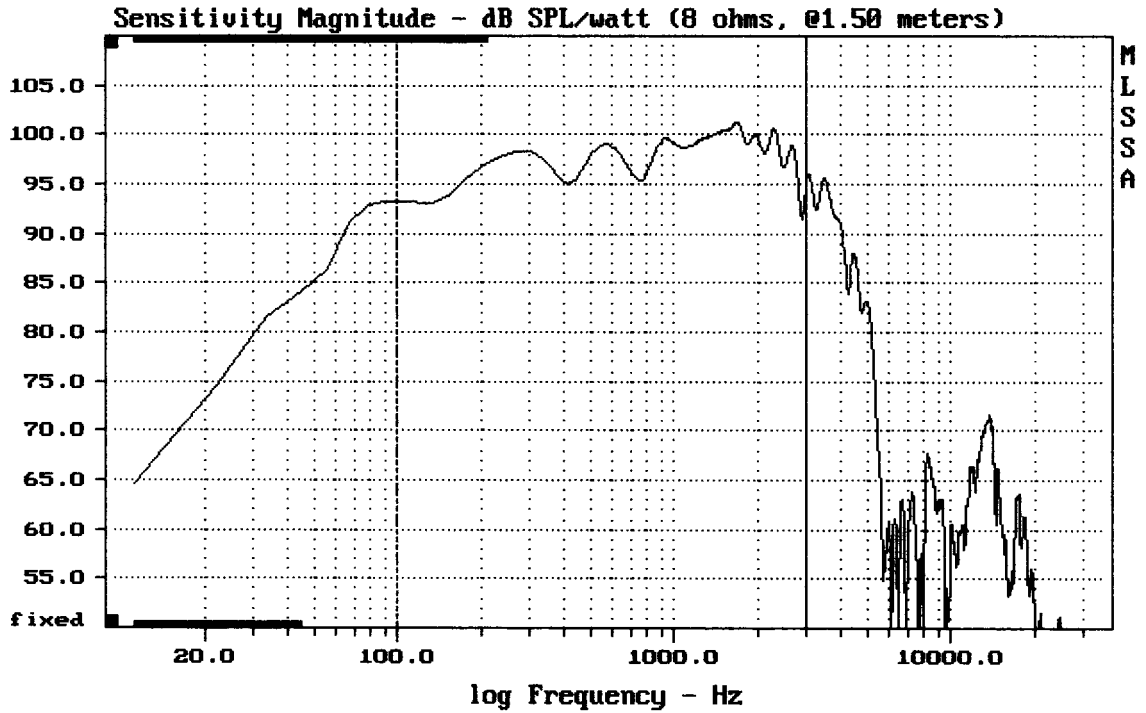

Level (100:2996 Hz) = 97.74 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 15P

MLSSA: Frequency Domain

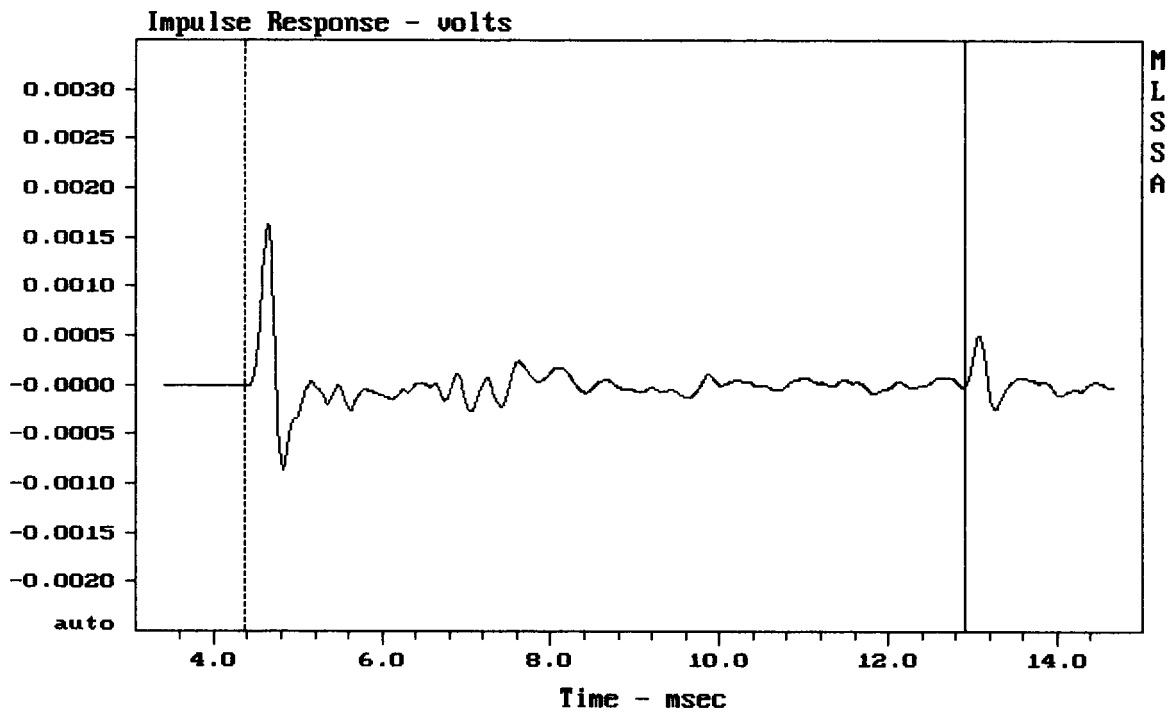

CURSOR: y = -1.665e-005 x = 12.9030 (1173)

D.A.S. 15P

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	34.45	Hz
3	Re	6.31	Ohms[dc]
4	Res	106.07	Ohms
5	Qms	6.41	
6	Qes	0.38	
7	Qts	0.36	
8	L1	0.95	mH
9	L2	1.22	mH
10	R2	3.93	Ohms
11	RMSE-load	0.56	Ohms
12	Vas(Sd)	302.30	liters
13	Mms	68.24	grams
14	Cms	313	$\mu\text{M}/\text{Newton}$
15	B1	15.63	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.1% (-20% to -50% is recommended).

D.A.S. 15P

MLSSA: Parameters

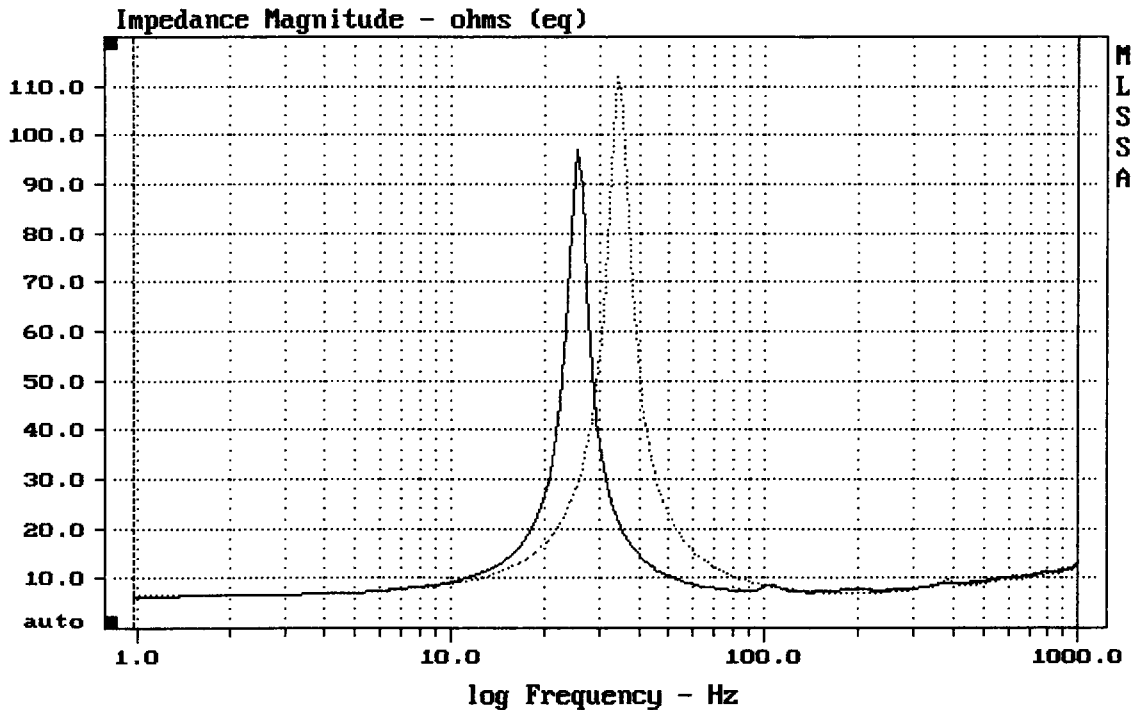

CURSOR: dy = -0.0214157 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain