

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	39.93	Hz
3	Re	5.92	Ohms[dc]
4	Res	132.22	Ohms
5	Qms	7.37	
6	Qes	0.33	
7	Qts	0.32	
8	L1	1.17	mH
9	L2	1.89	mH
10	R2	10.82	Ohms
11	RMSE-load	0.96	Ohms
12	Vas(Sd)	142.83	liters
13	Mms	114.26	grams
14	Cms	139	$\mu\text{M}/\text{Newton}$
15	B1	22.67	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.3% (-20% to -50% is recommended).


DAS 15S

MLSSA: Parameters

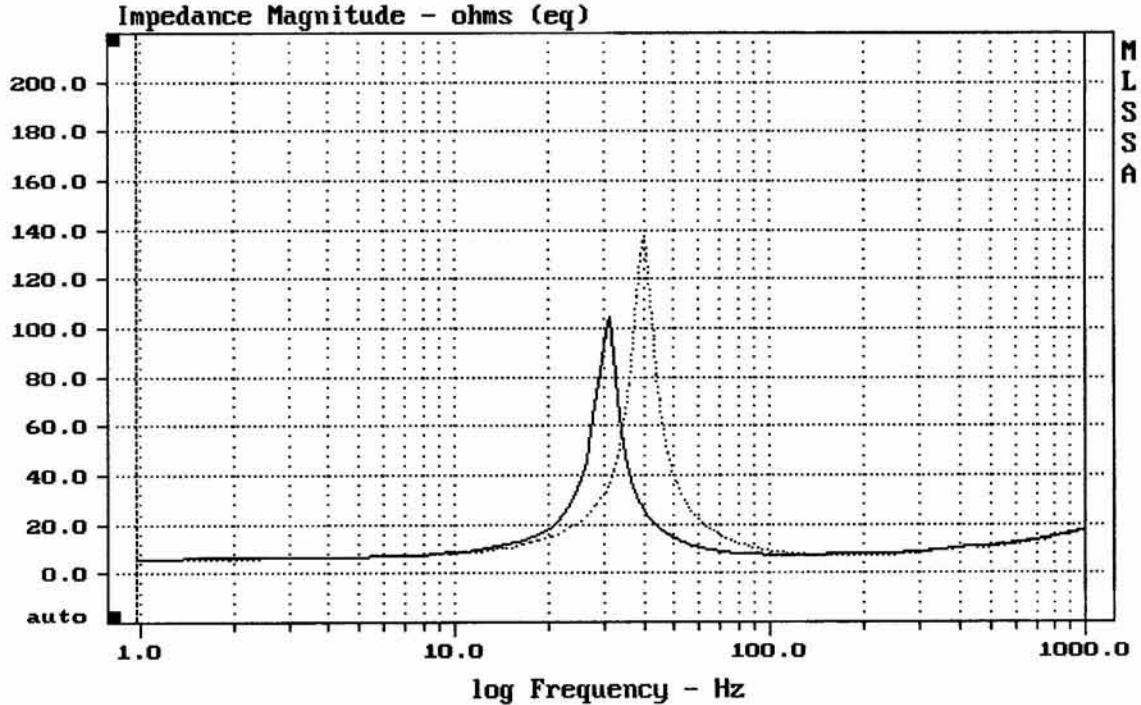

CURSOR: dy = -0.327831 x = 1000.9766 (1025)


MLSSA: Frequency Domain

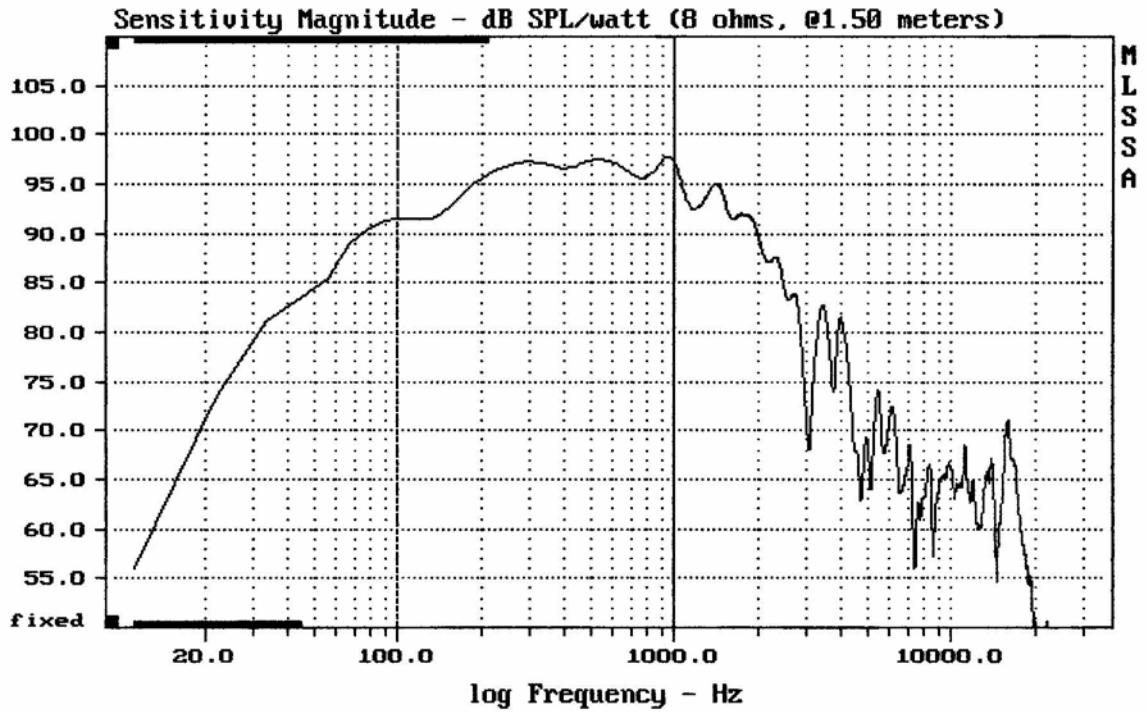

Level (100:999 Hz) = 95.92 dB SPL/watt (8 ohms, @1.50 meters)

DAS 15S

MLSSA: Frequency Domain

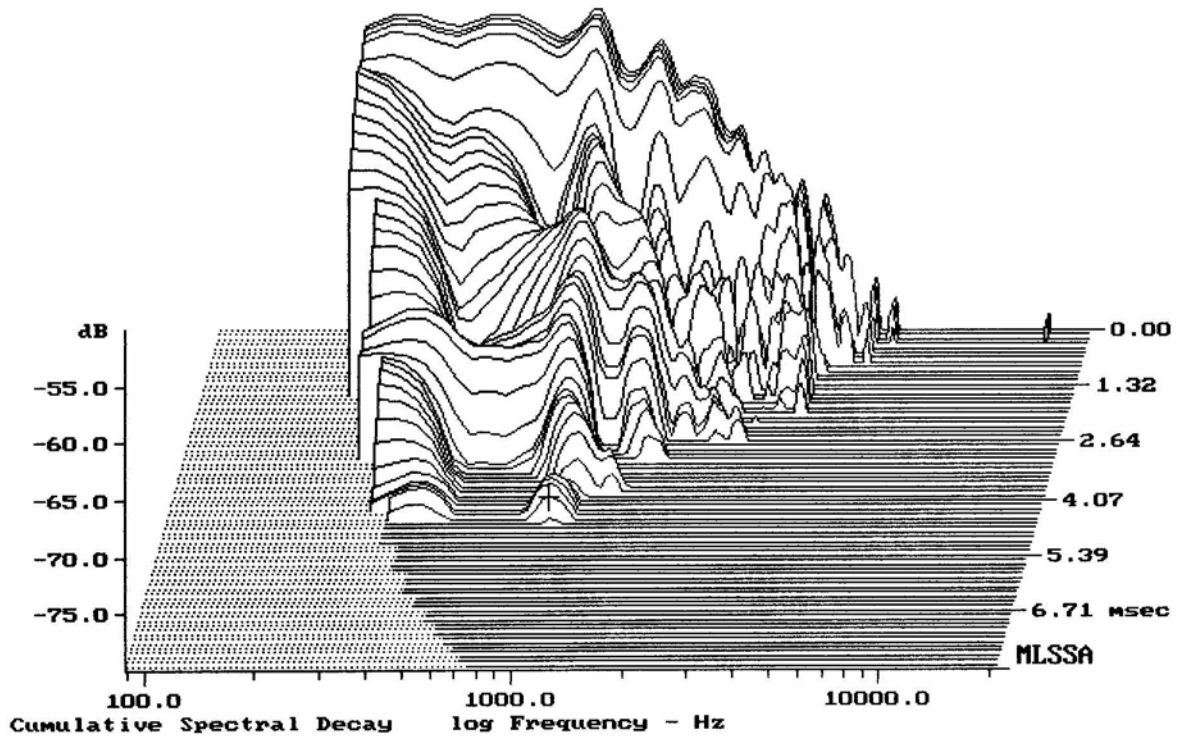

-78.01 dB, 977 Hz (22), 4.510 msec (42)