


Level (100:1898 Hz) = 94.88 dB SPL/watt (8 ohms, @1.50 meters)

DAS 155X

MLSSA: Frequency Domain

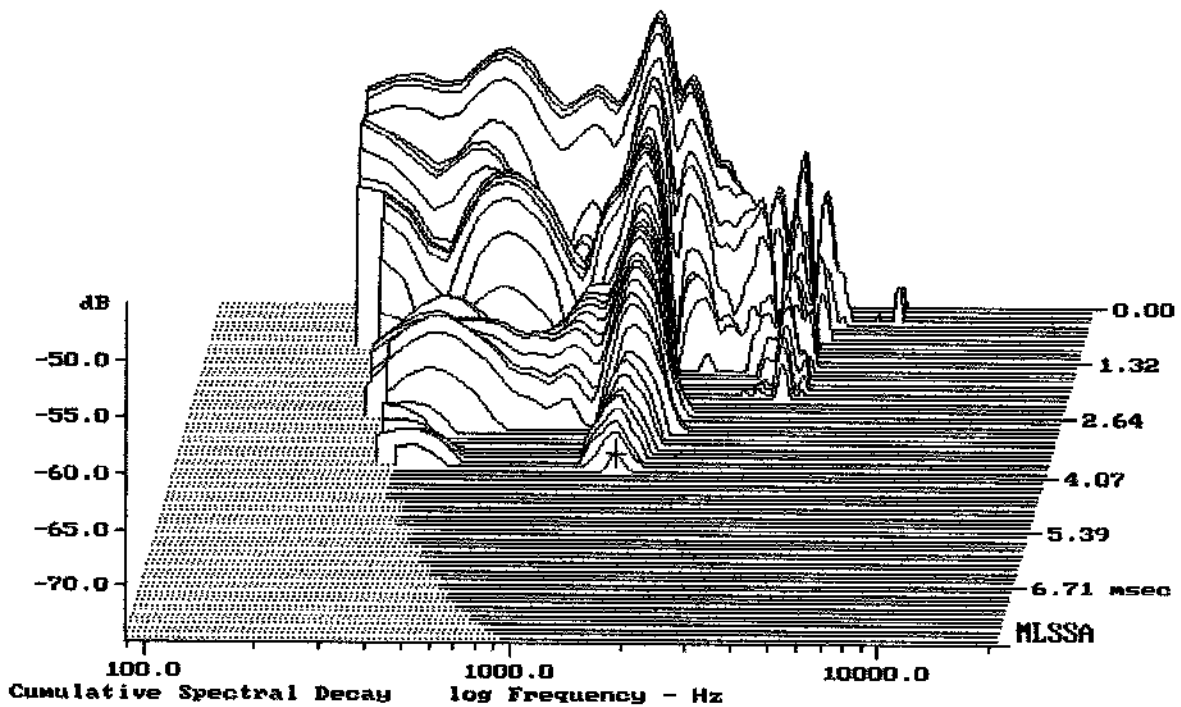

-73.45 dB, 1420 Hz (32), 3.960 msec (37)

## Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.71	Ohms
2	Fs	43.72	Hz
3	Re	6.36	Ohms[dc]
4	Res	50.97	Ohms
5	Qms	3.55	
6	Qes	0.44	
7	Qts	0.39	
8	L1	1.37	mH
9	L2	2.24	mH
10	R2	10.58	Ohms
11	RMSE-load	0.78	Ohms
12	Vas(Sd)	118.02	liters
13	Mms	122.53	grams
14	Cms	108	$\mu\text{M}/\text{Newton}$
15	B1	22.00	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.3% (-20% to -50% is recommended).

DAS 15SX

MLSSA: Parameters

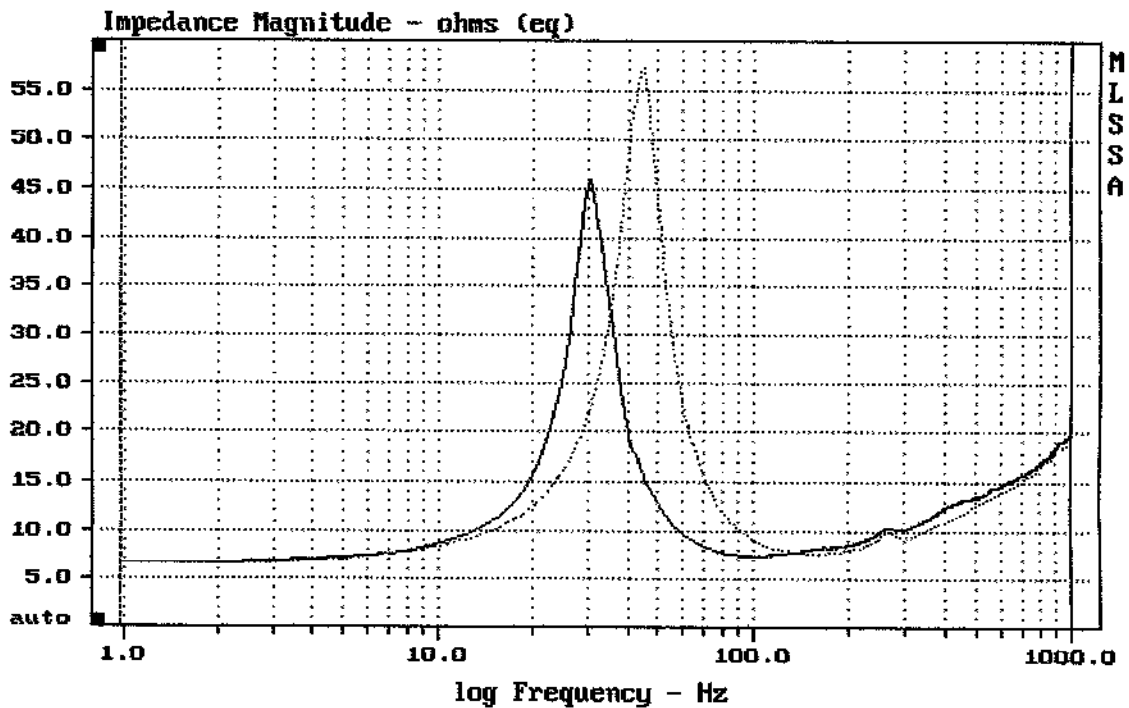


---

mean: 13.84, rms: 15.06, std: 5.947, max: 57.24, min: 6.552

---

MLSSA: Frequency Domain