


Level (55:1998 Hz) = 95.33 dB SPL/watt (8 ohms, @1.50 meters)

DAS18LX

MLSSA: Frequency Domain

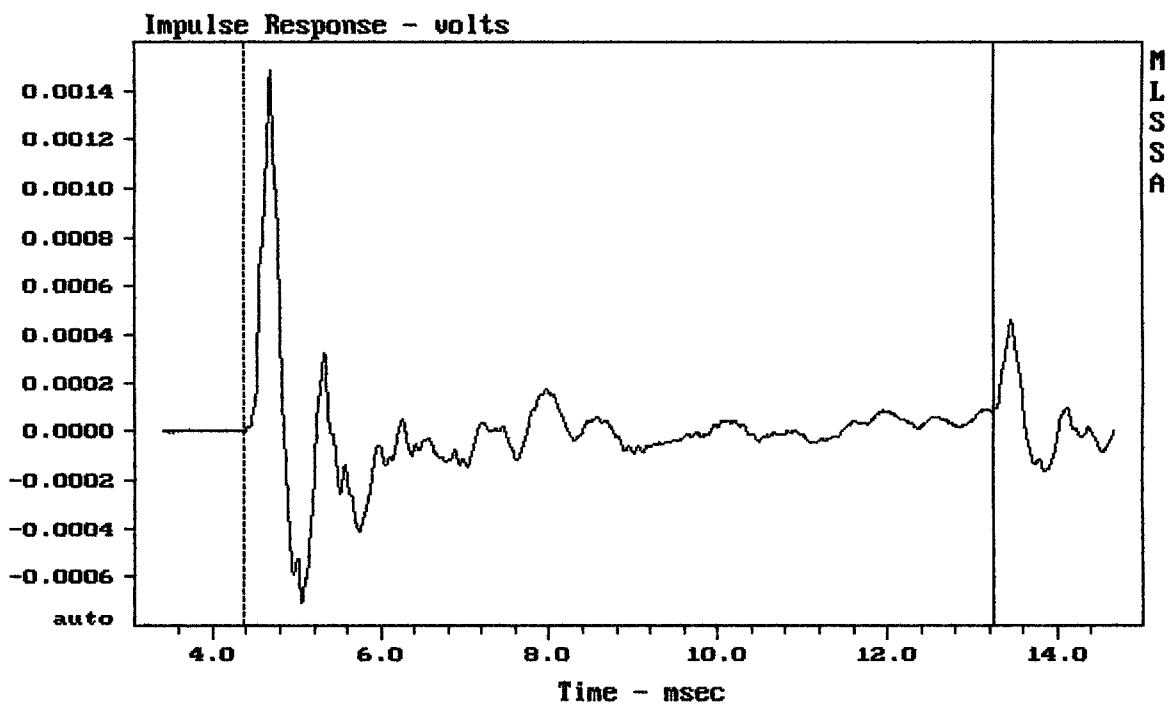

mean: -2.238e-007, rms: 0.0002259, std: 0.0002259, max: 0.001484, min: -0.0007

DAS18LX

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.75	Ohms
2	Fs	40.51	Hz
3	Re	6.52	Ohms[dc]
4	Res	88.39	Ohms
5	Qms	7.46	
6	Qes	0.55	
7	Qts	0.51	
8	L1	1.47	mH
9	L2	2.16	mH
10	R2	9.24	Ohms
11	RMSE-load	0.83	Ohms
12	Vas(Sd)	181.09	liters
13	Mms	153.98	grams
14	Cms	100	$\mu\text{M}/\text{Newton}$
15	B1	21.55	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.5% (-20% to -50% is recommended).

DAS18LX

MLSSA: Parameters

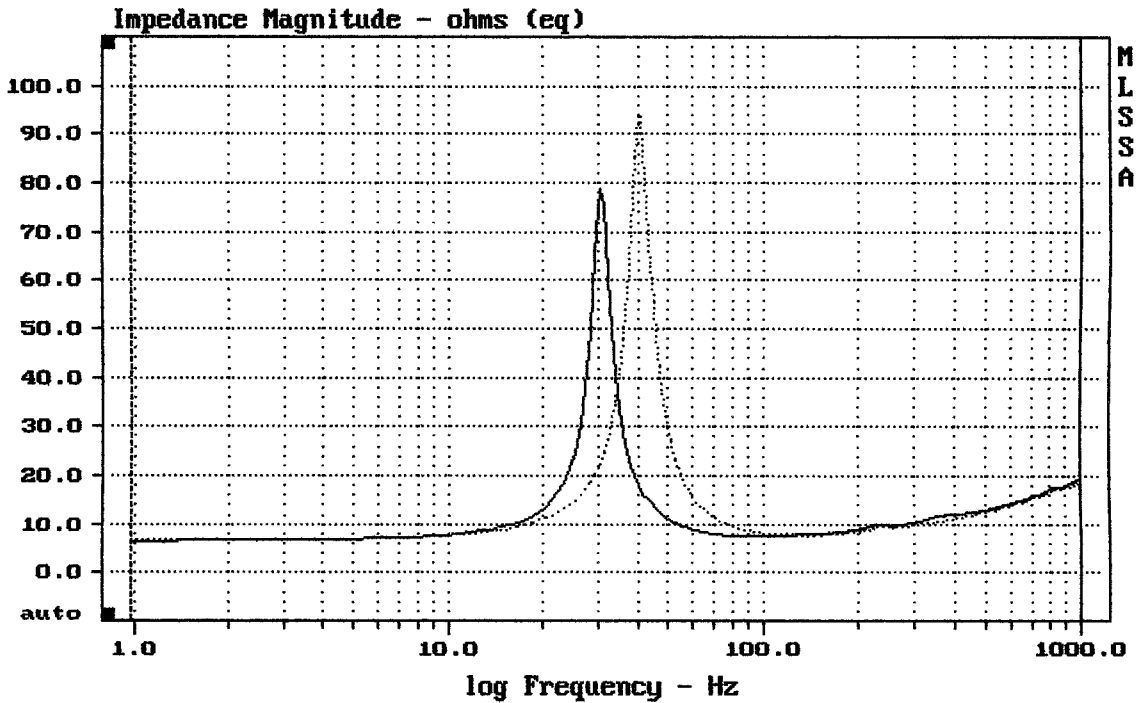

mean: 13.87, rms: 15.66, std: 7.254, max: 93.91, min: 6.589

MLSSA: Frequency Domain