


Level (55:1998 Hz) = 95.91 dB SPL/watt (8 ohms, @1.50 meters)

DAS 18SX

MLSSA: Frequency Domain

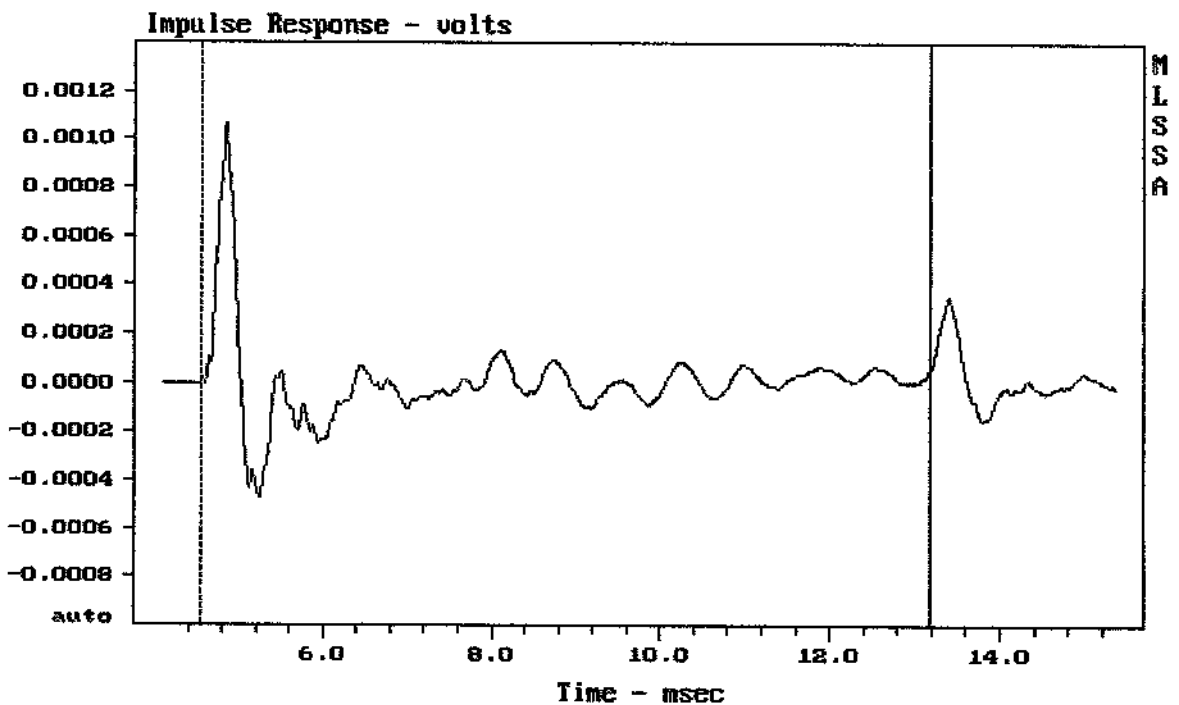

mean: 6.754e-007, rms: 0.0001658, std: 0.0001658, max: 0.001063, min: -0.00047

DAS 18SX

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	49.30	Hz
3	Re	6.30	Ohms[dc]
4	Res	47.87	Ohms
5	Qms	4.86	
6	Qes	0.64	
7	Qts	0.57	
8	L1	1.41	mH
9	L2	2.06	mH
10	R2	8.58	Ohms
11	RMSE-load	0.73	Ohms
12	Vas(Sd)	136.87	liters
13	Mms	144.94	grams
14	Cms	72	$\mu\text{M}/\text{Newton}$
15	B1	21.03	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.3% (-20% to -50% is recommended).

DAS 18SX

MLSSA: Parameters

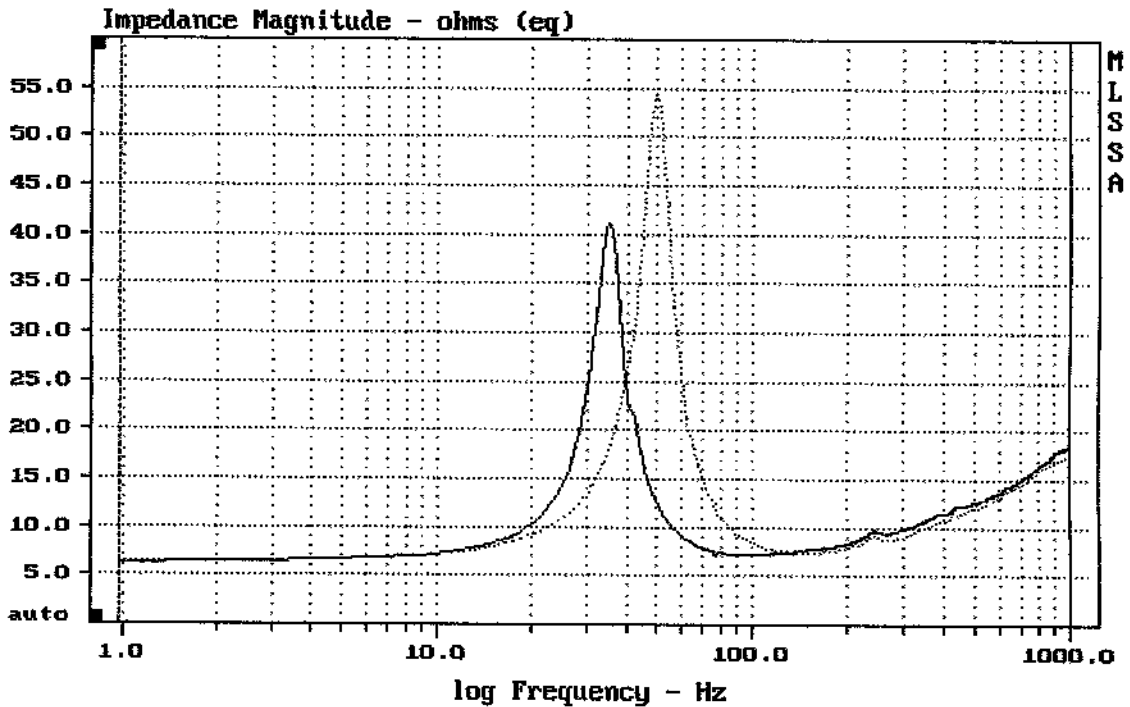

mean: 13.05, rms: 14.06, std: 5.233, max: 54.28, min: 6.334

MLSSA: Frequency Domain