


Level (100:3007 Hz) = 94.40 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTA 12LF

MLSSA: Frequency Domain

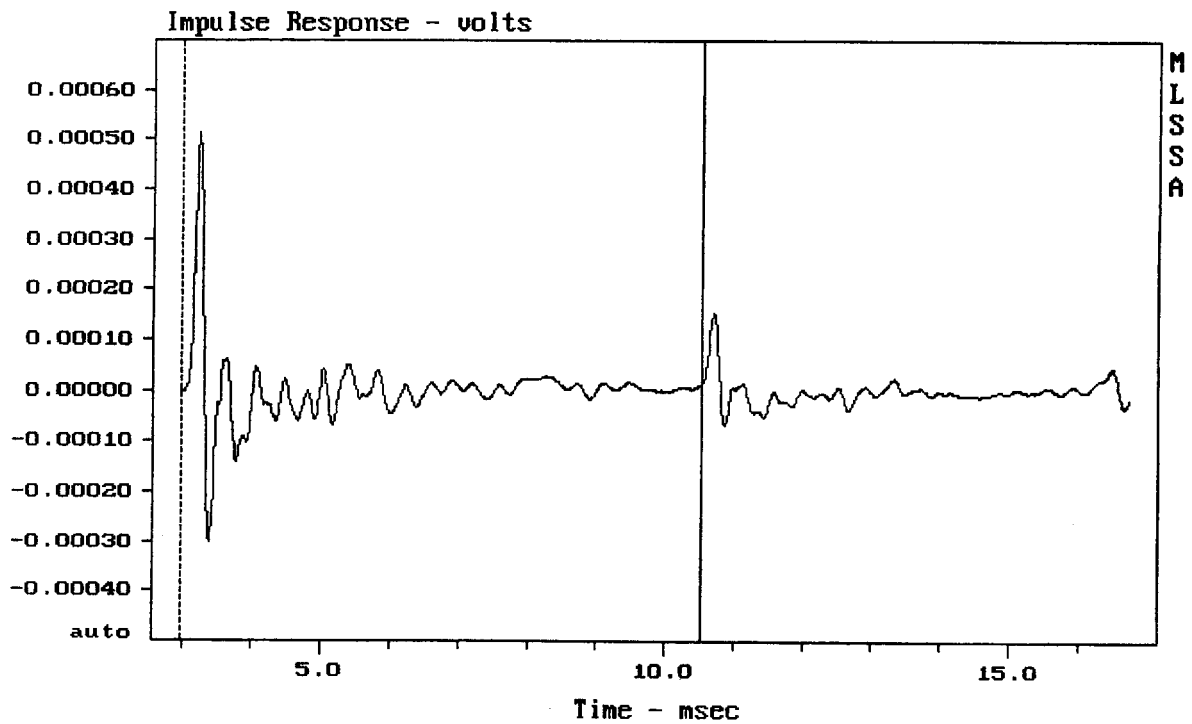

CURSOR: y = 1.46067e-005 x = 10.5380 (958)

EMINENCE DELTA 12LF

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	52.40	Hz
3	Re	6.28	Ohms[dc]
4	Res	88.99	Ohms
5	Qms	7.27	
6	Qes	0.51	
7	Qts	0.48	
8	L1	1.09	mH
9	L2	1.73	mH
10	R2	6.63	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	74.32	liters
13	Mms	49.14	grams
14	Cms	188	$\mu\text{M}/\text{Newton}$
15	B1	14.07	Tesla-M
16	SPLref(Sd)	95.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).

EMINENCE DELTA 12LF

MLSSA: Parameters

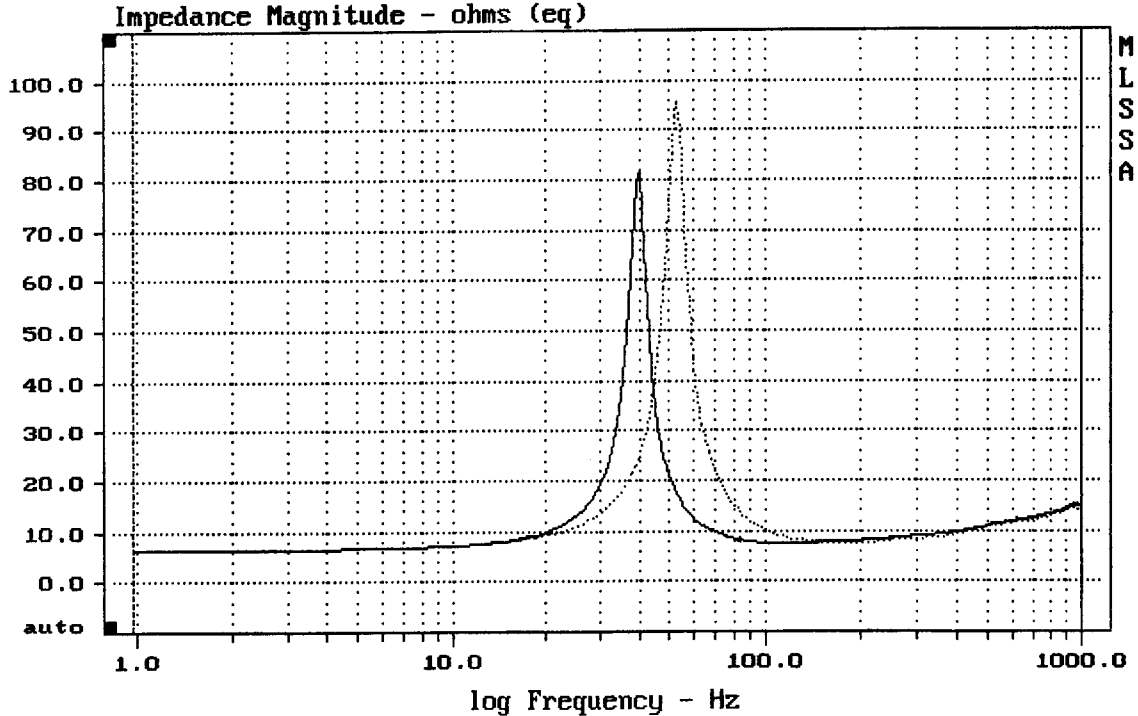

CURSOR: dy = -0.514864 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain