


Level (100:4006 Hz) = 99.93 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DELTA 15

MLSSA: Frequency Domain

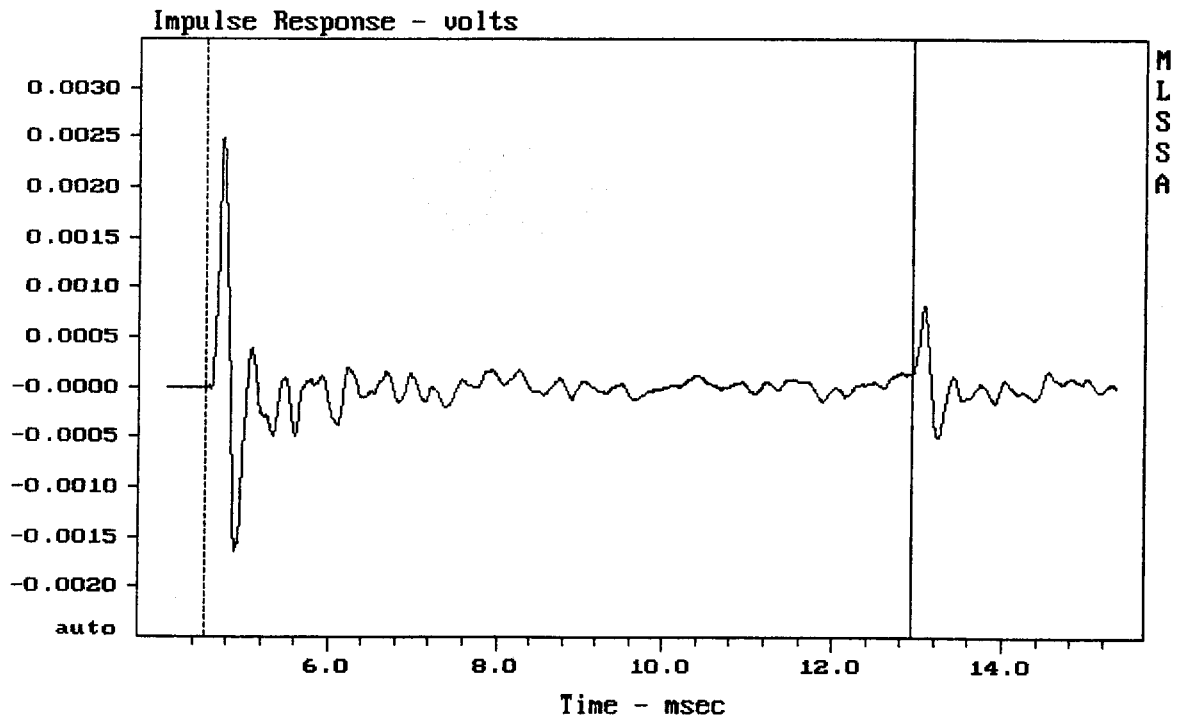

CURSOR: y = 0.00012142 x = 12.9250 (1175)

EMINENCE DELTA 15

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.50	Ohms
2	Fs	39.23	Hz
3	Re	6.26	Ohms[dc]
4	Res	111.45	Ohms
5	Qms	9.82	
6	Qes	0.55	
7	Qts	0.52	
8	L1	0.25	mH
9	L2	1.25	mH
10	R2	7.95	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	259.35	liters
13	Mms	65.19	grams
14	Cms	252	$\mu\text{M}/\text{Newton}$
15	B1	13.51	Tesla-M
16	SPLref(Sd)	96.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.9% (-20% to -50% is recommended).

EMINENCE DELTA 15

MLSSA: Parameters

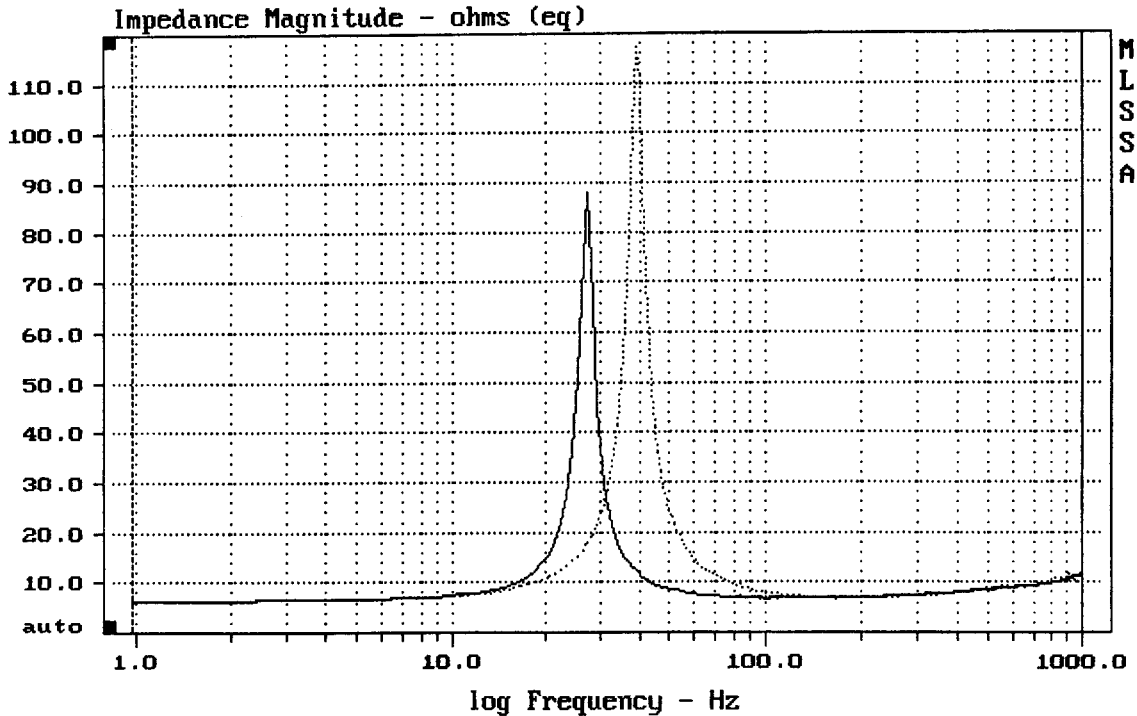

CURSOR: dy = -1.38465 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain