



Level (55:1498 Hz) = 93.58 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DELTA PRO 18

MLSSA: Frequency Domain

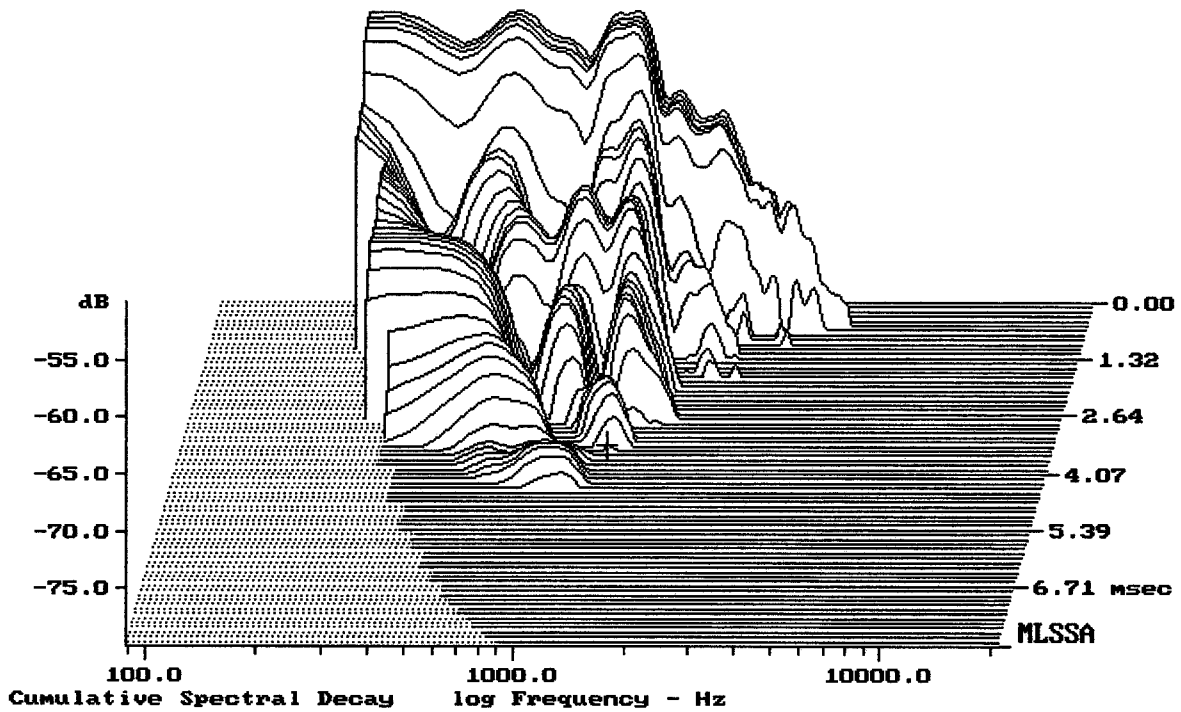

-79.58 dB, 1287 Hz (29), 3.520 msec (33)

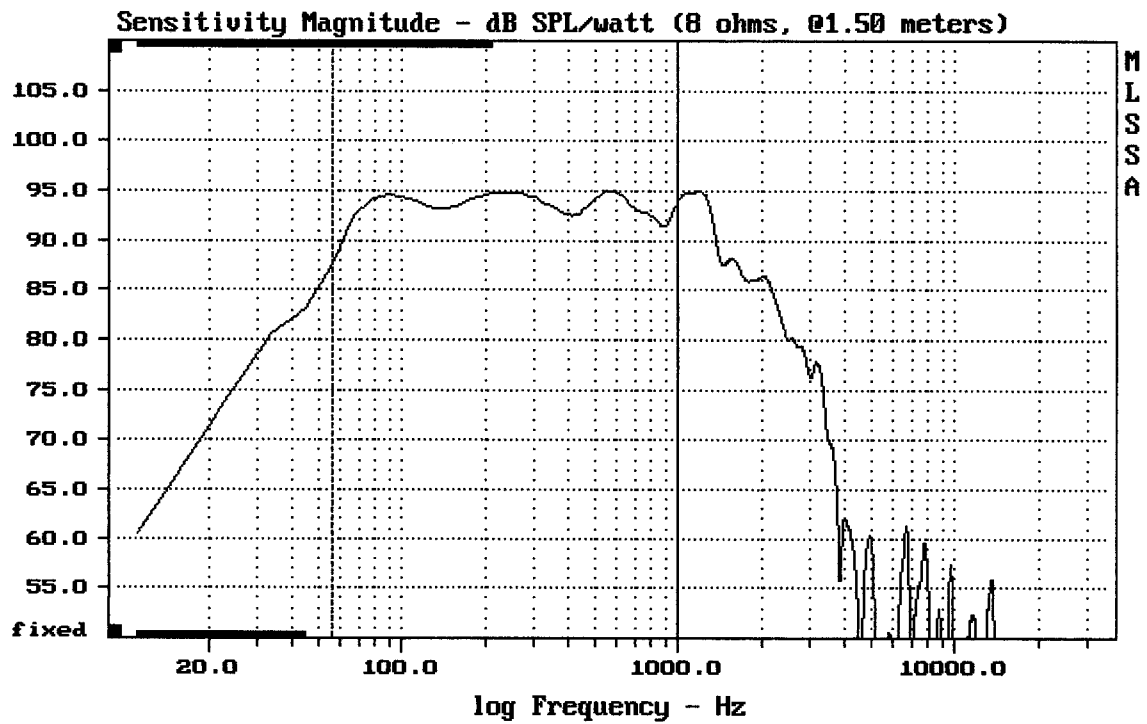



---

Level (55:999 Hz) = 93.58 dB SPL/watt (8 ohms, @1.50 meters)

---

EMINENCE DELTA PRO 18

MLSSA: Frequency Domain

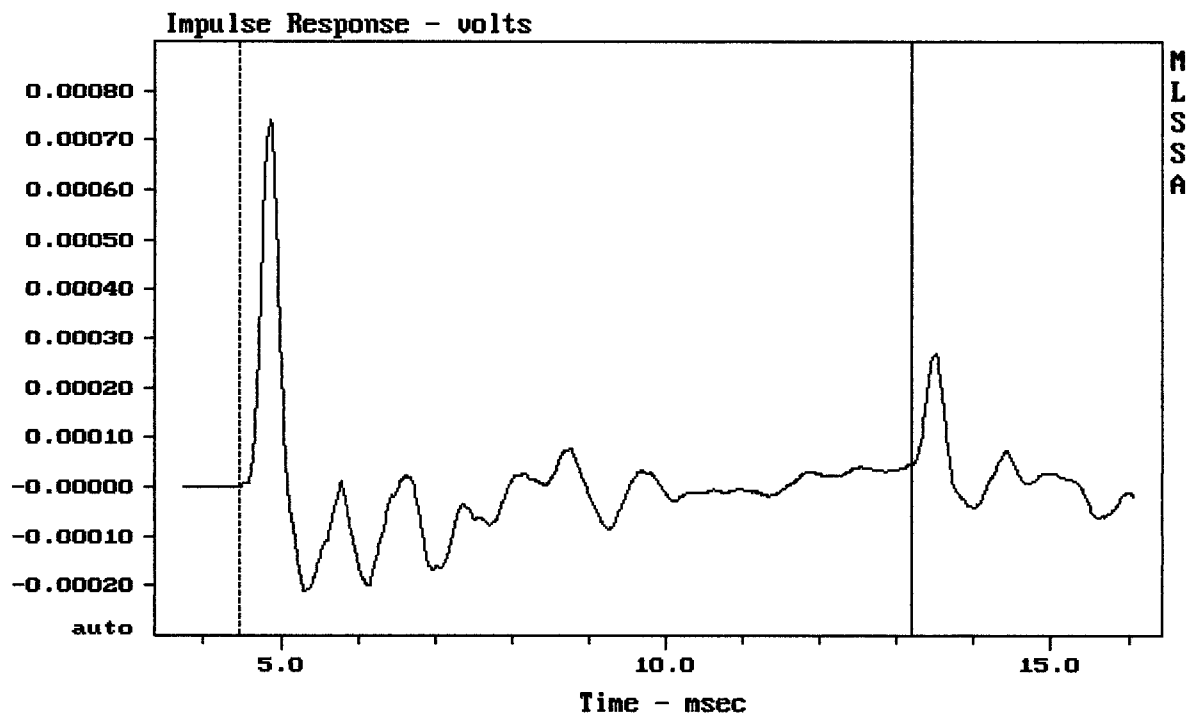


---

mean: -3.36e-006, rms: 0.0001272, std: 0.0001271, max: 0.0007392, min: -0.0002

---

EMINENCE DELTA PRO 18

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.13	Ohms
2	Fs	26.58	Hz
3	Re	5.37	Ohms[dc]
4	Res	173.94	Ohms
5	Qms	10.10	
6	Qes	0.31	
7	Qts	0.30	
8	L1	2.50	mH
9	L2	3.76	mH
10	R2	18.21	Ohms
11	RMSE-load	0.96	Ohms
12	Vas(Sd)	523.60	liters
13	Mms	137.25	grams
14	Cms	261	$\mu\text{M}/\text{Newton}$
15	Bl	19.87	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).

EMINENCE DELTA PRO 18

MLSSA: Parameters

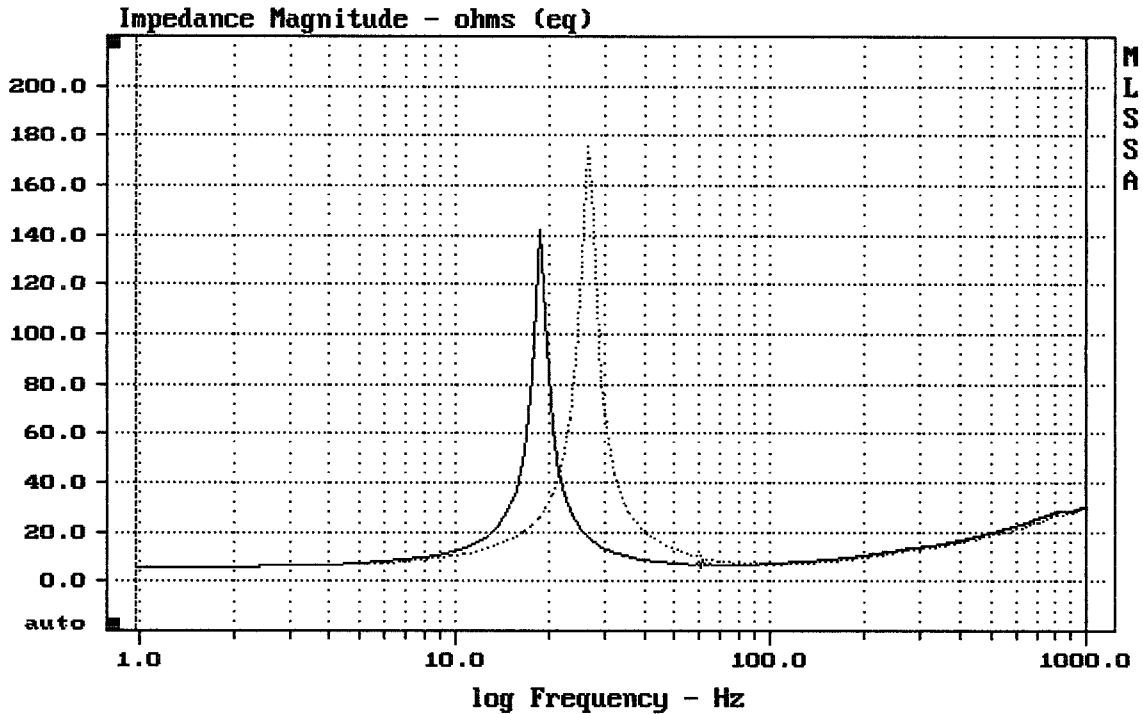

mean: 19.48, rms: 22.57, std: 11.4, max: 175.9, min: 5.507

MLSSA: Frequency Domain