

MLSSA SPO 4.W #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	36.77	Hz
3	Re	6.68	Ohms[dc]
4	Res	35.95	Ohms
5	Qms	3.56	
6	Qes	0.66	
7	Qts	0.56	
8	L1	0.57	mH
9	L2	1.21	mH
10	R2	5.01	Ohms
11	RMSE-load	0.47	Ohms
12	Vas(Sd)	347.39	liters
13	Mms	54.74	grams
14	Cms	342	μ M/Newton
15	B1	11.30	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.01	

EBP: 65,7

Method: Mass-loaded (80.00 grams)

Area (Sd): 850.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.9% (-20% to -50% is recommended).


ME15-200

MLSSA: Parameters

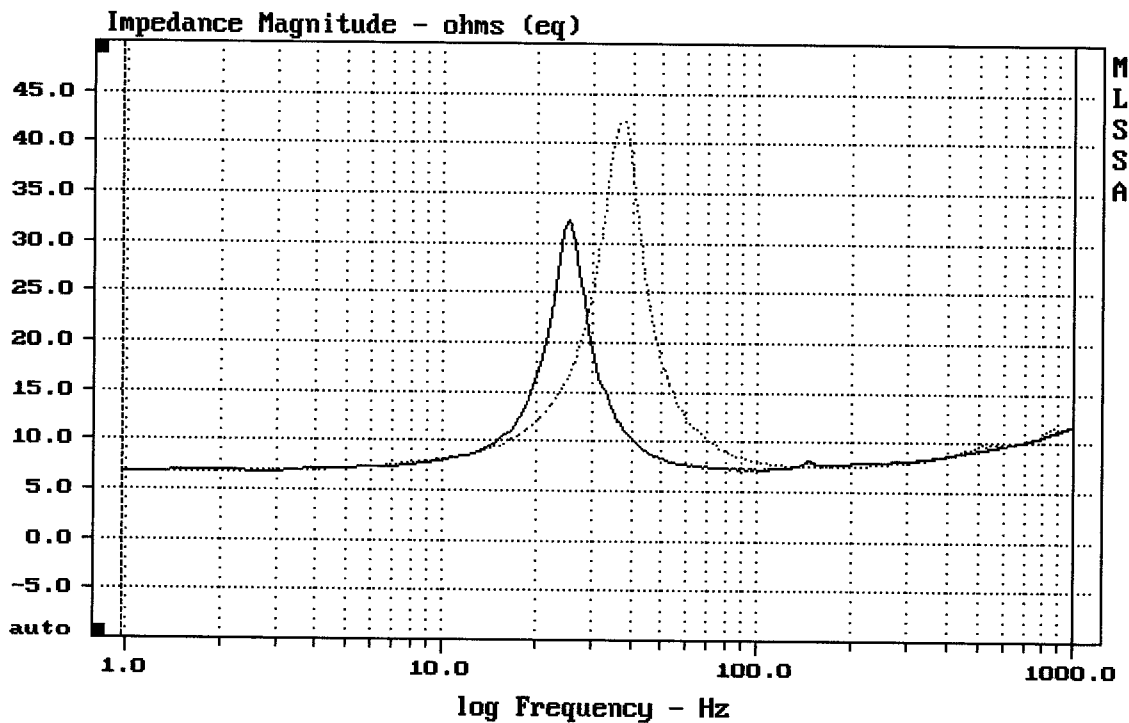

CURSOR: dy = -0.137897 x = 1000.9766 (1025)

MLSSA: Frequency Domain

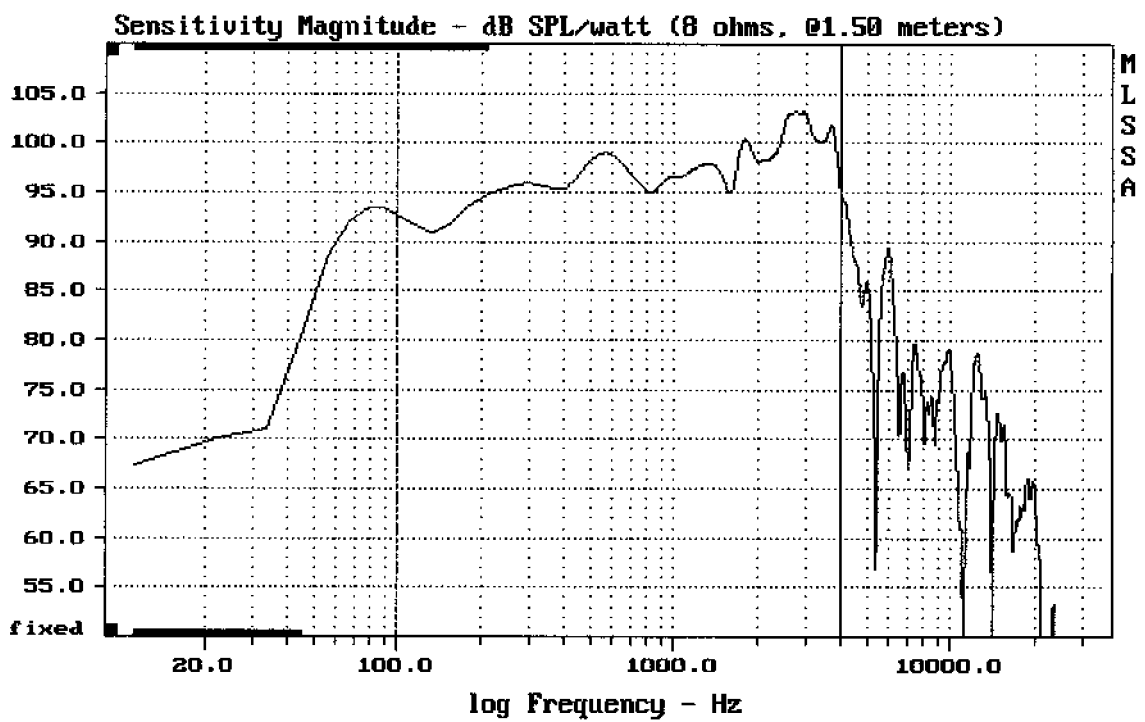

Level (100:4006 Hz) = 97.56 dB SPL/watt (8 ohms, @1.50 meters)

ME 15-200