


Level (100:5005 Hz) = 96.07 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE ALPHA 12

MLSSA: Frequency Domain

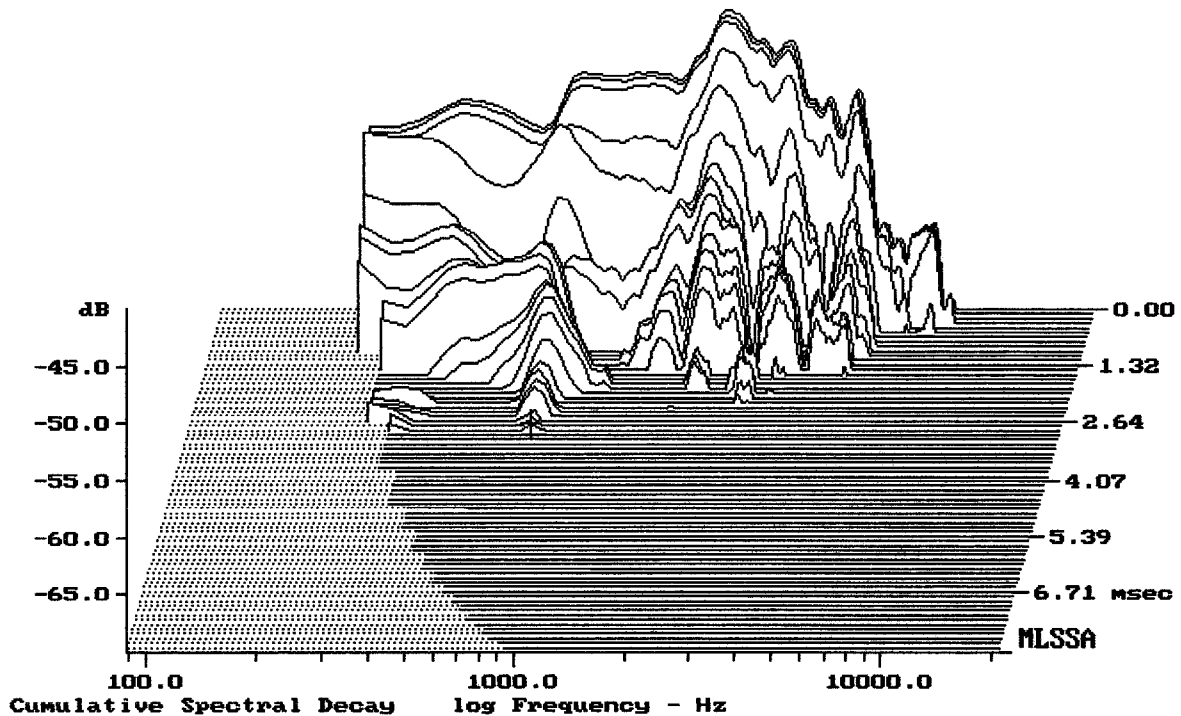

-69.35 dB, 755 Hz (17), 2.860 msec (27)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.30	Ohms
2	Fs	50.51	Hz
3	Re	6.58	Ohms[dc]
4	Res	36.06	Ohms
5	Qms	5.22	
6	Qes	0.95	
7	Qts	0.81	
8	L1	0.70	mH
9	L2	0.87	mH
10	R2	3.23	Ohms
11	RMSE-load	0.27	Ohms
12	Vas(Sd)	127.07	liters
13	Mms	30.93	grams
14	Cms	321	$\mu\text{M}/\text{Newton}$
15	B1	8.24	Tesla-M
16	SPLref(Sd)	94.2	dB[Re]
17	Rub-index	0.10	

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.5% (-20% to -50% is recommended).

EMINENCE ALPHA 12

MLSSA: Parameters

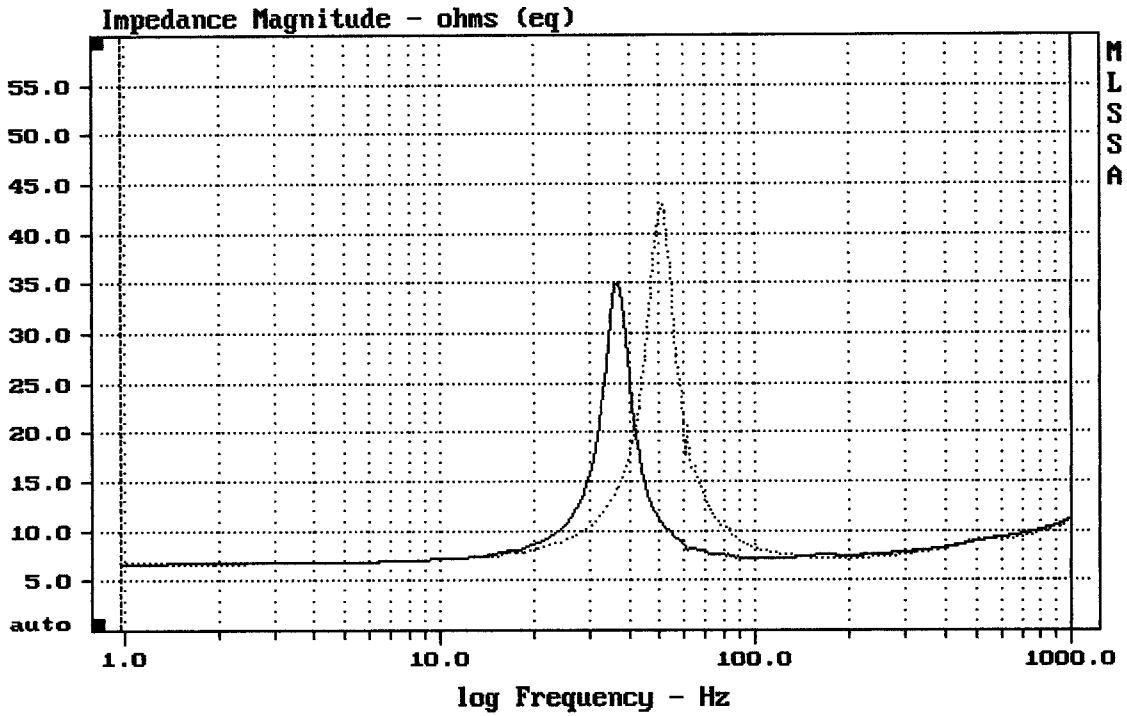

mean: 9.434 std: 3.541, max: 42.89, min: 6.705

MLSSA: Frequency Domain