


Level (100:11800 Hz) = 97.11 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 12LT

MLSSA: Frequency Domain

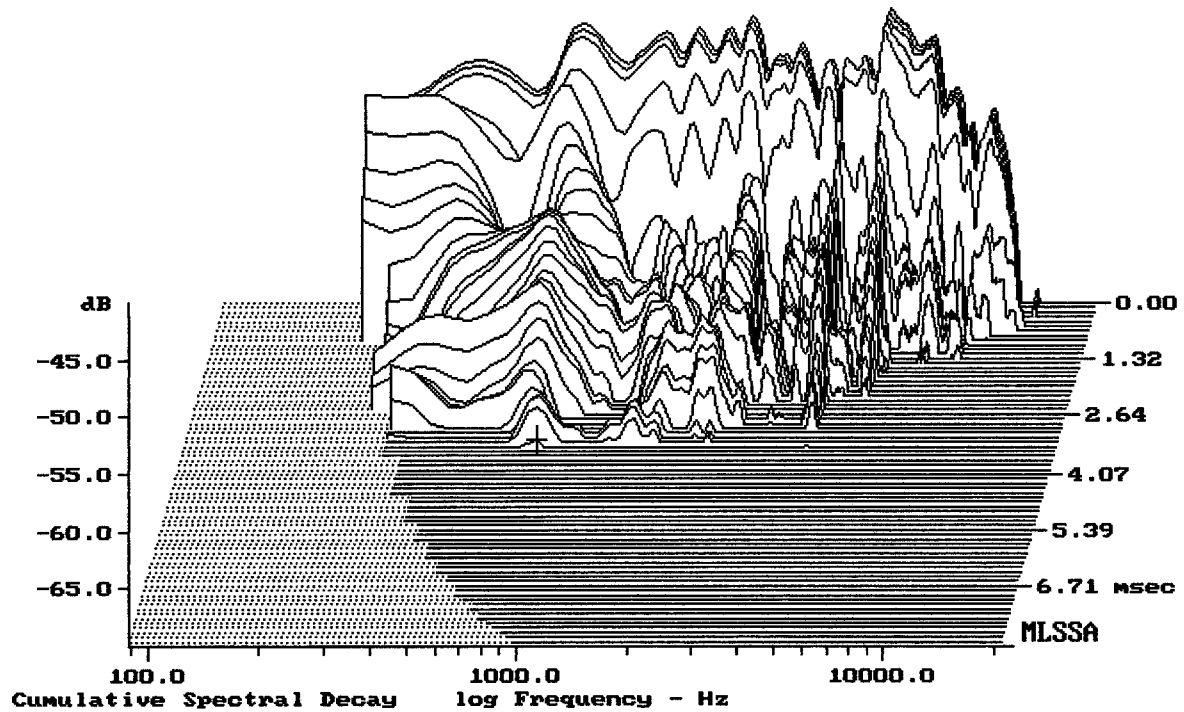

-69.42 dB, 799 Hz (18), 3.410 msec (32)

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	46.48	Hz
3	Re	7.43	Ohms[dc]
4	Res	105.74	Ohms
5	Qms	7.27	
6	Qes	0.51	
7	Qts	0.48	
8	L1	0.72	mH
9	L2	1.07	mH
10	R2	4.58	Ohms
11	RMSE-load	0.29	Ohms
12	Vas(Sd)	129.04	liters
13	Mms	38.83	grams
14	Cms	302	μ M/Newton
15	B1	12.84	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.2% (-20% to -50% is recommended).

EMINENCE BETA 12LT

MLSSA: Parameters

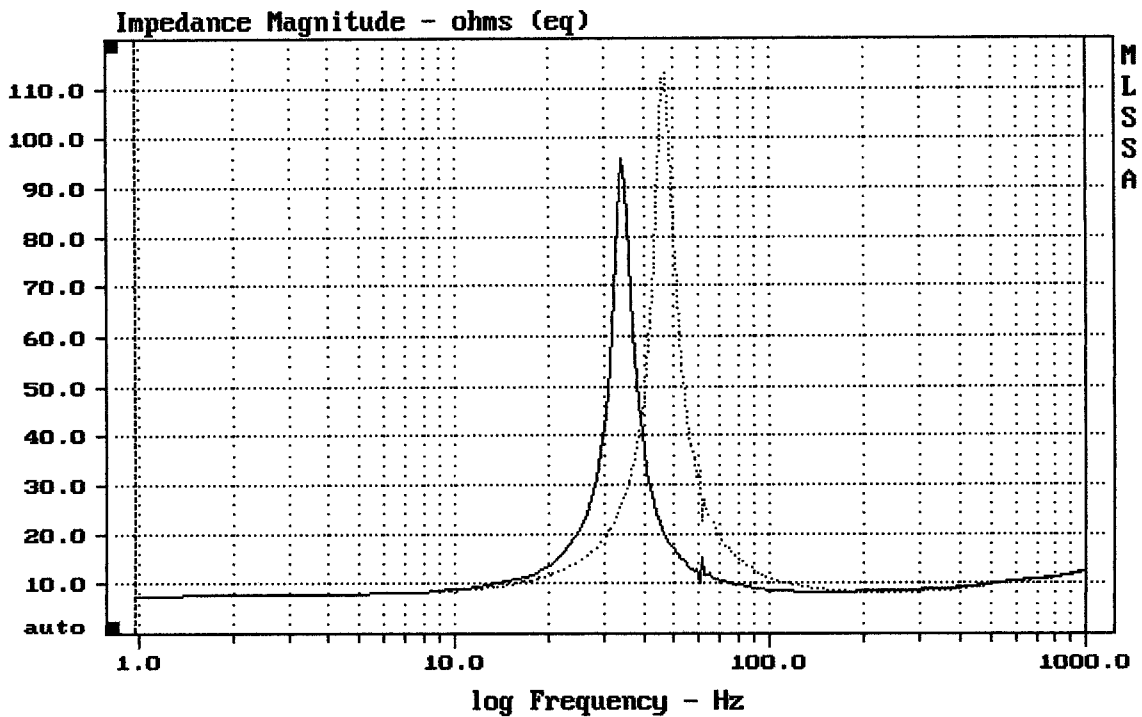

mean: 11.71, rms: 14.85, std: 9.14, max: 112.9, min: 7.565

MLSSA: Frequency Domain