


Level (100:3007 Hz) = 95.02 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DEFINIMAX 4012HO

MLSSA: Frequency Domain

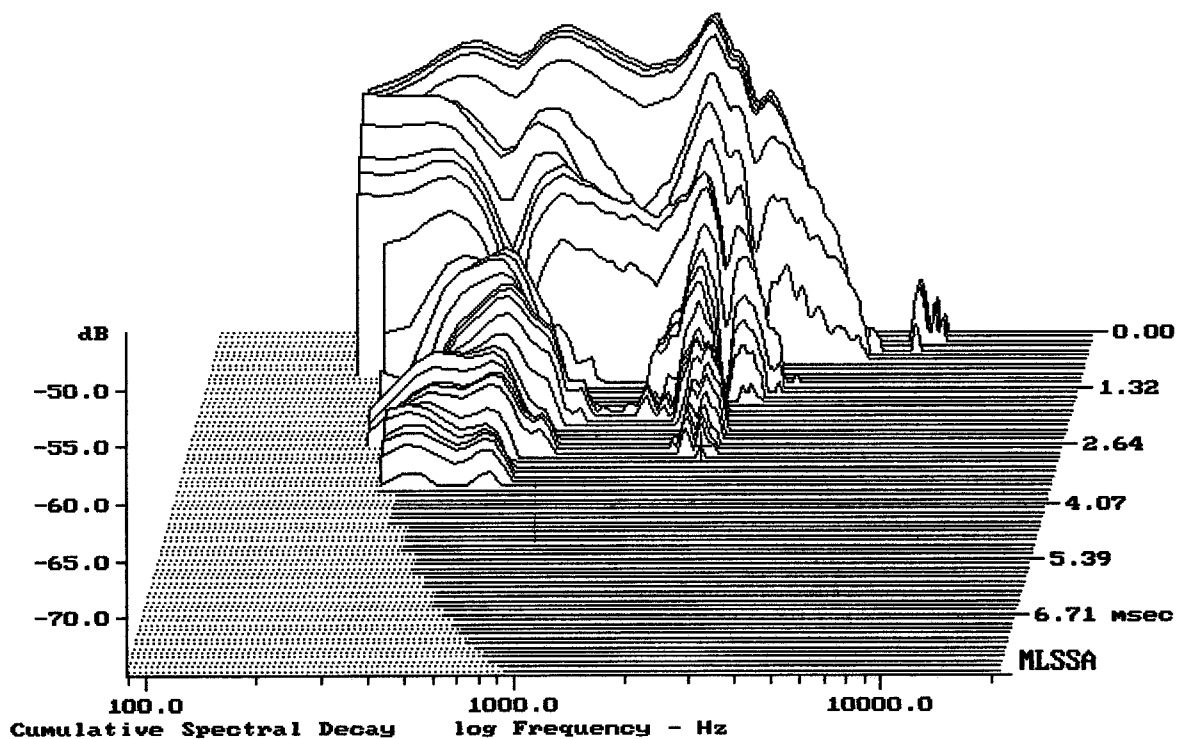

-74.08 dB, 2219 Hz (50), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	49.41	Hz
3	Re	5.68	Ohms[dc]
4	Res	96.12	Ohms
5	Qms	6.02	
6	Qes	0.36	
7	Qts	0.34	
8	L1	1.05	mH
9	L2	1.20	mH
10	R2	4.26	Ohms
11	RMSE-load	0.57	Ohms
12	Vas(Sd)	63.28	liters
13	Mms	70.04	grams
14	Cms	148	$\mu\text{M}/\text{Newton}$
15	B1	18.63	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.08	

Method: Mass-loaded (60.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.2% (-20% to -50% is recommended).

EMINENCE DEFINIMAX 4012HO

MLSSA: Parameters

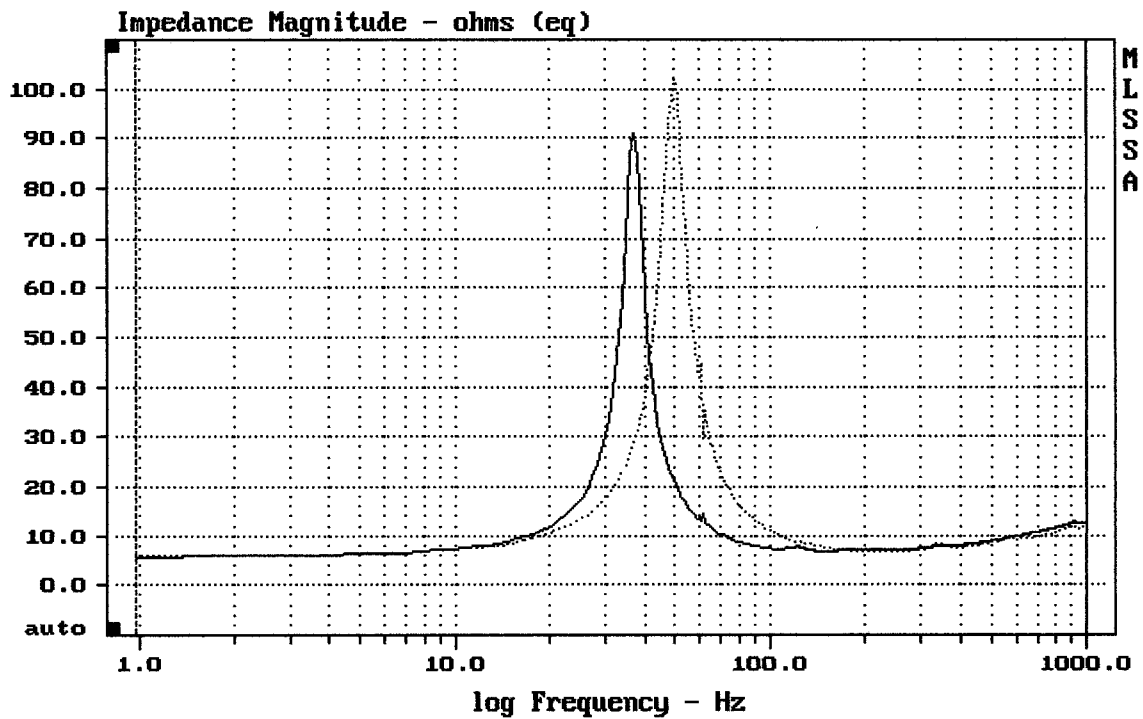

mean: 10.88, rms: 14.31, std: 9.302, max: 102.4, min: 5.855

MLSSA: Frequency Domain