



Level (100:1154 Hz) = 94.39 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DEFINIMAX 4015LF

MLSSA: Frequency Domain

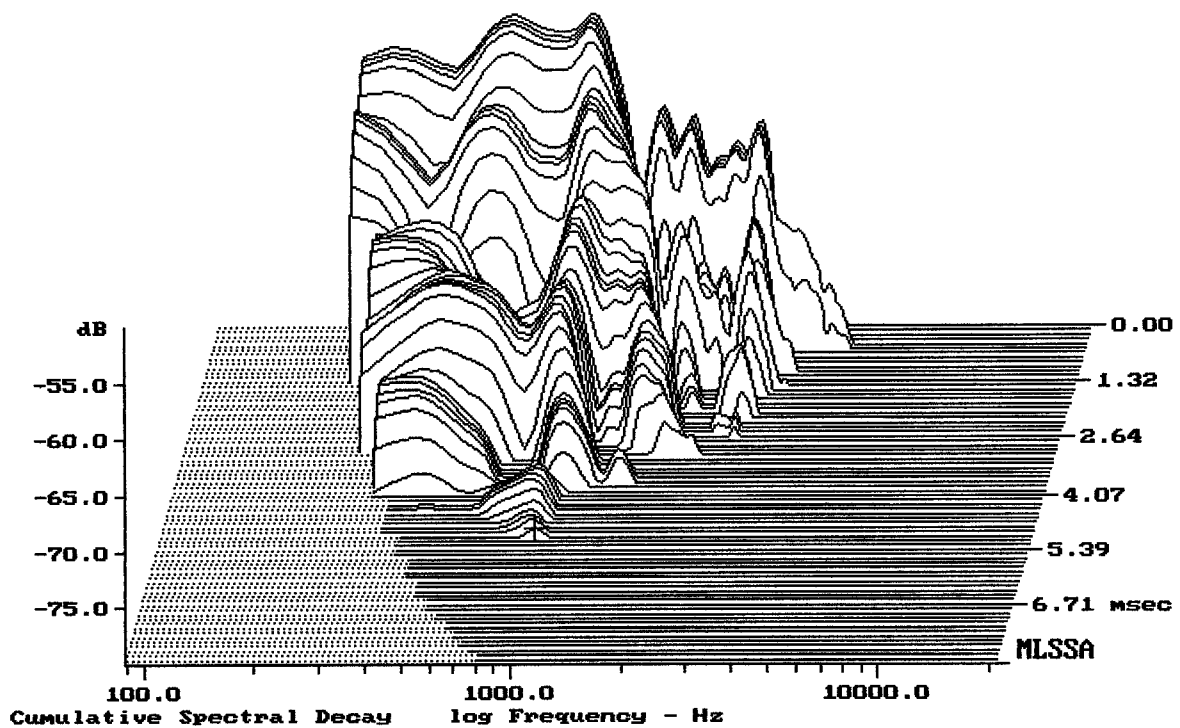


-79.26 dB, 932 Hz (21), 5.060 msec (47)

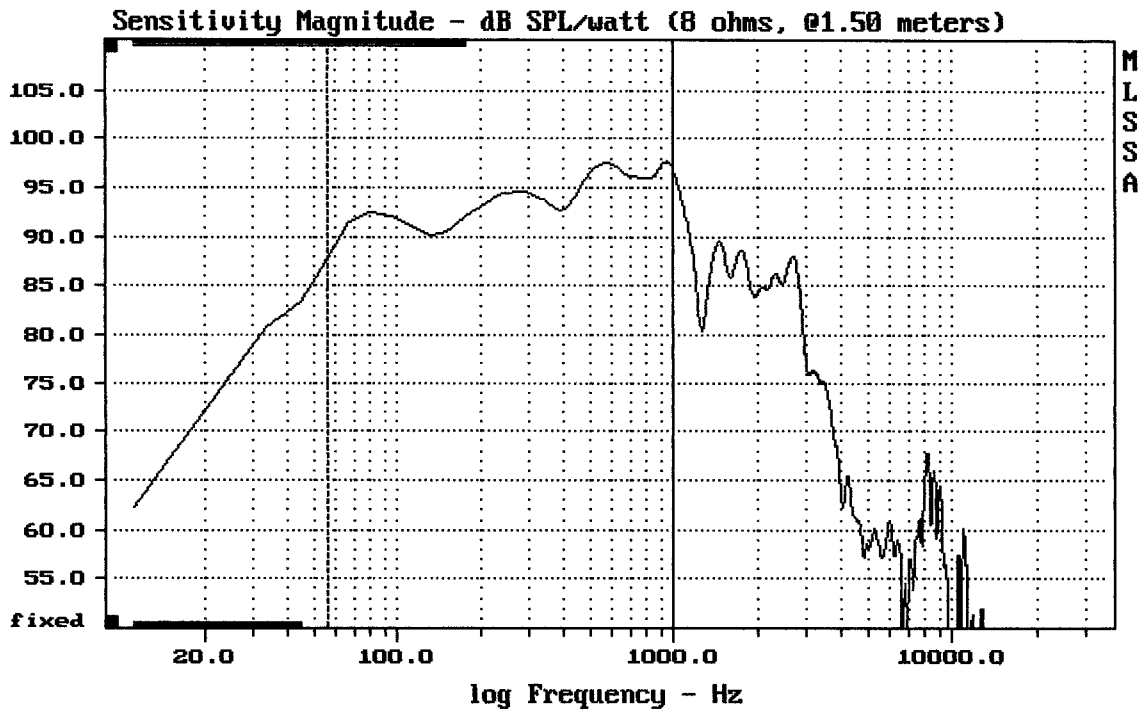

Level (55:999 Hz) = 94.00 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DEFINIMAX 4015LF

MLSSA: Frequency Domain

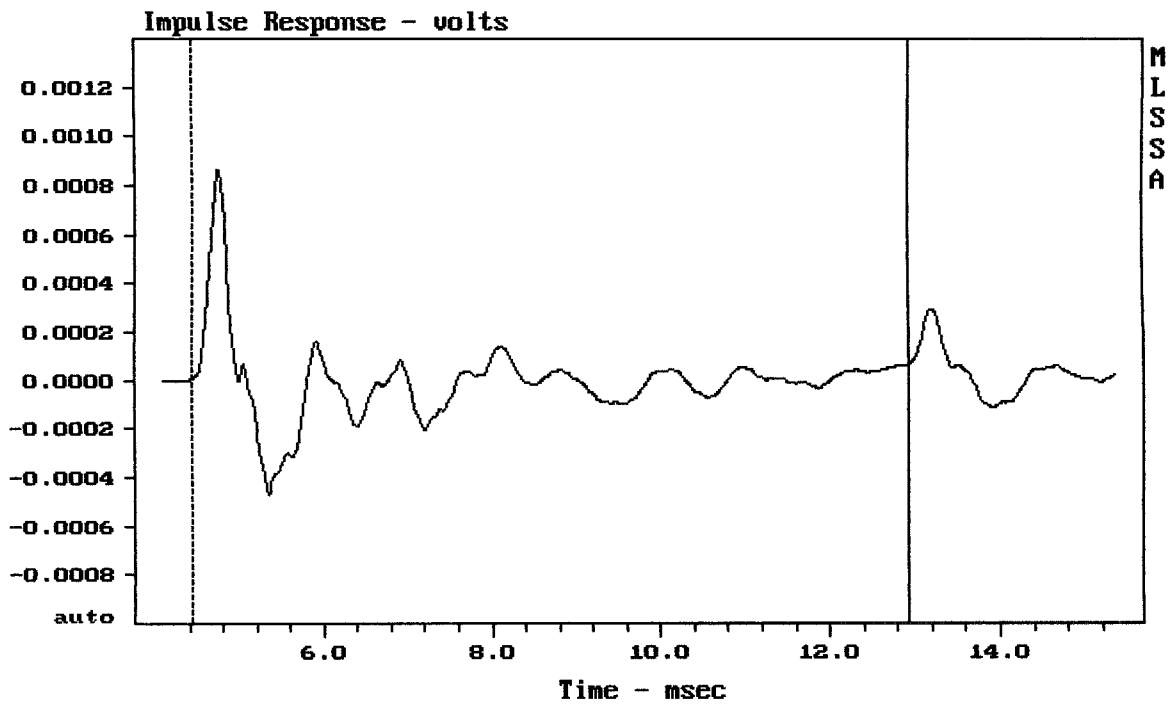

mean: -5.25e-006, rms: 0.0001626, std: 0.0001625, max: 0.000866, min: -0.00046

EMINENCE DEFINIMAX 4015LF

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	39.03	Hz
3	Re	5.20	Ohms[dc]
4	Res	109.23	Ohms
5	Qms	11.64	
6	Qes	0.55	
7	Qts	0.53	
8	L1	1.73	mH
9	L2	1.74	mH
10	R2	5.12	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	145.66	liters
13	Mms	117.30	grams
14	Cms	142	$\mu\text{M}/\text{Newton}$
15	B1	16.43	Tesla-M
16	SPLref(Sd)	93.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.5% (-20% to -50% is recommended).

EMINENCE DEFINIMAX 4015LF

MLSSA: Parameters

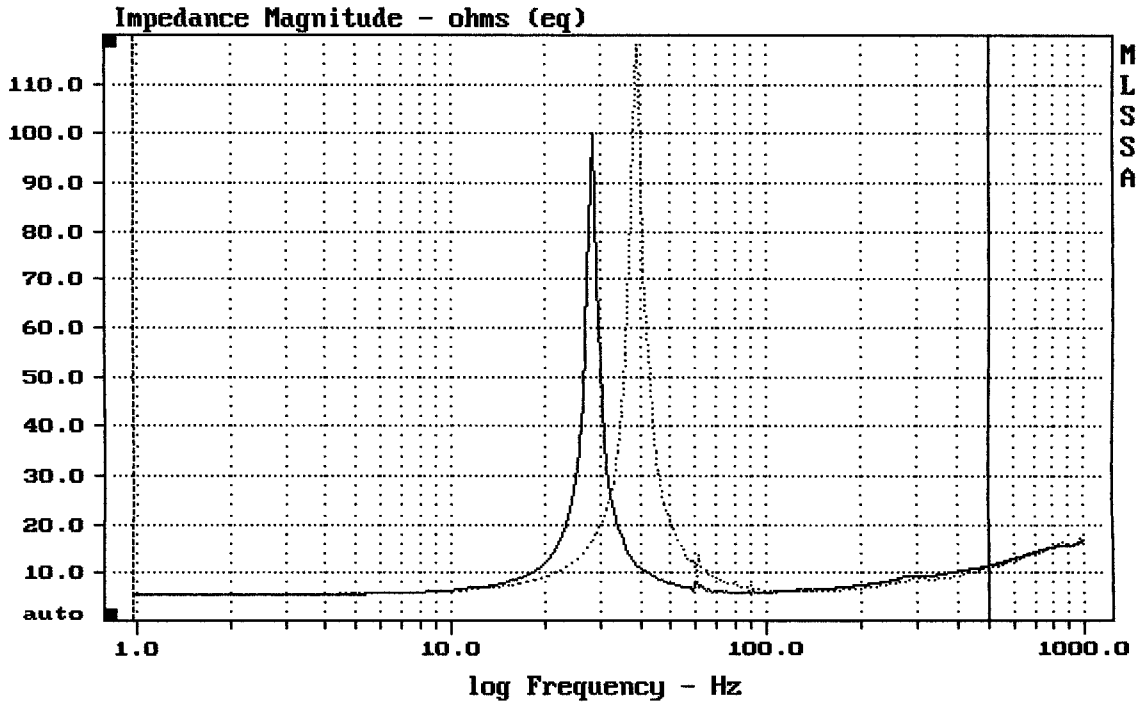

mean: 10.05, rms: 14.05, std: 9.824, max: 118.1, min: 5.346

MLSSA: Frequency Domain