


Level (55:999 Hz) = 91.62 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DEFINIMAX 4018LF

9-7-89 6:33 PM

MLSSA: Frequency Domain

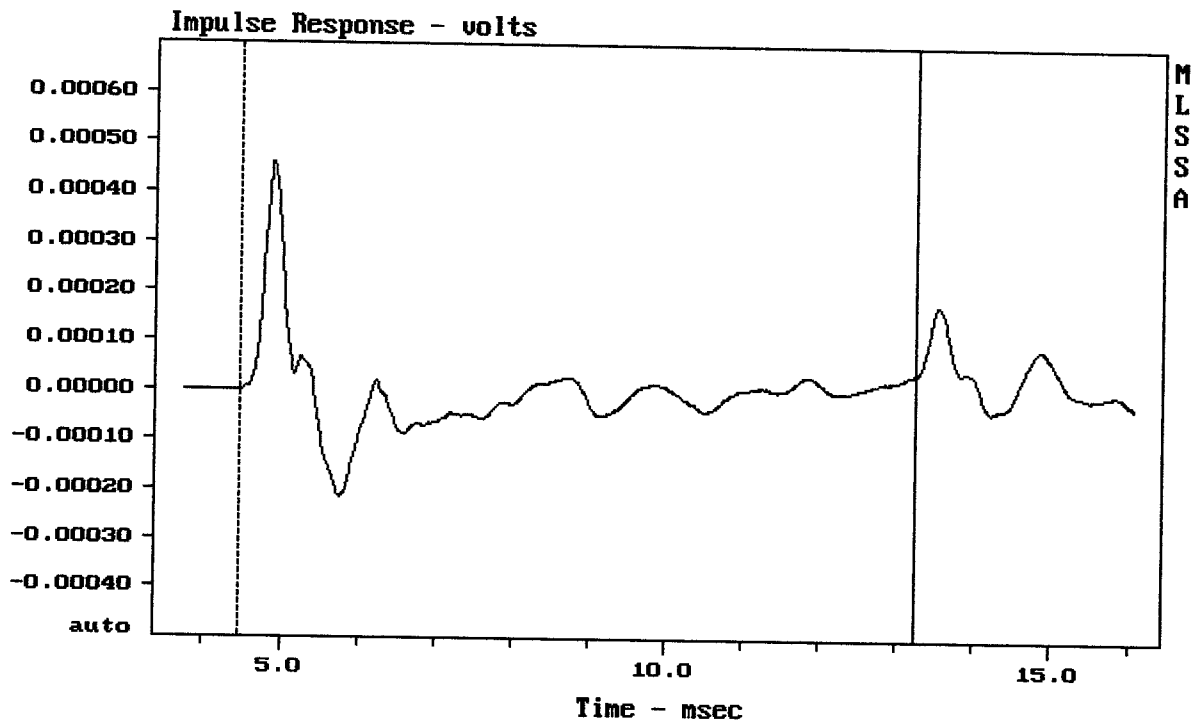

mean: $-4.738e-006$, rms: $8.536e-005$, std: $8.523e-005$, max: 0.0004603 , min: -0.0

EMINENCE DEFINIMAX 4018LF

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.38	Ohms
2	Fs	32.88	Hz
3	Re	6.14	Ohms[dc]
4	Res	169.16	Ohms
5	Qms	11.35	
6	Qes	0.41	
7	Qts	0.40	
8	L1	3.24	mH
9	L2	3.90	mH
10	R2	19.58	Ohms
11	RMSE-load	1.10	Ohms
12	Vas(Sd)	267.16	liters
13	Mms	175.73	grams
14	Cms	133	$\mu\text{M}/\text{Newton}$
15	B1	23.27	Tesla-M
16	SPLref(Sd)	95.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.5% (-20% to -50% is recommended).

EMINENCE DEFINIMAX 4018LF

MLSSA: Parameters

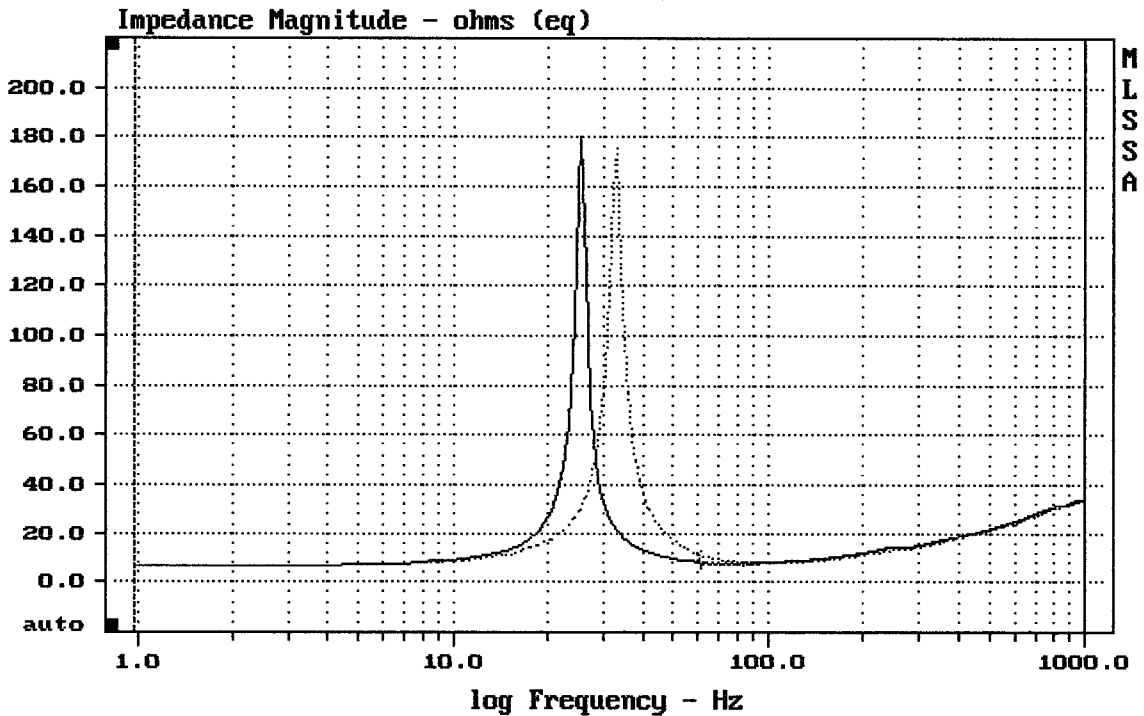

mean: 22.3, rms: 25.41, std: 12.19, max: 175.2, min: 6.218

MLSSA: Frequency Domain