


Level (100:4805 Hz) = 97.54 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTA PRO 12

MLSSA: Frequency Domain

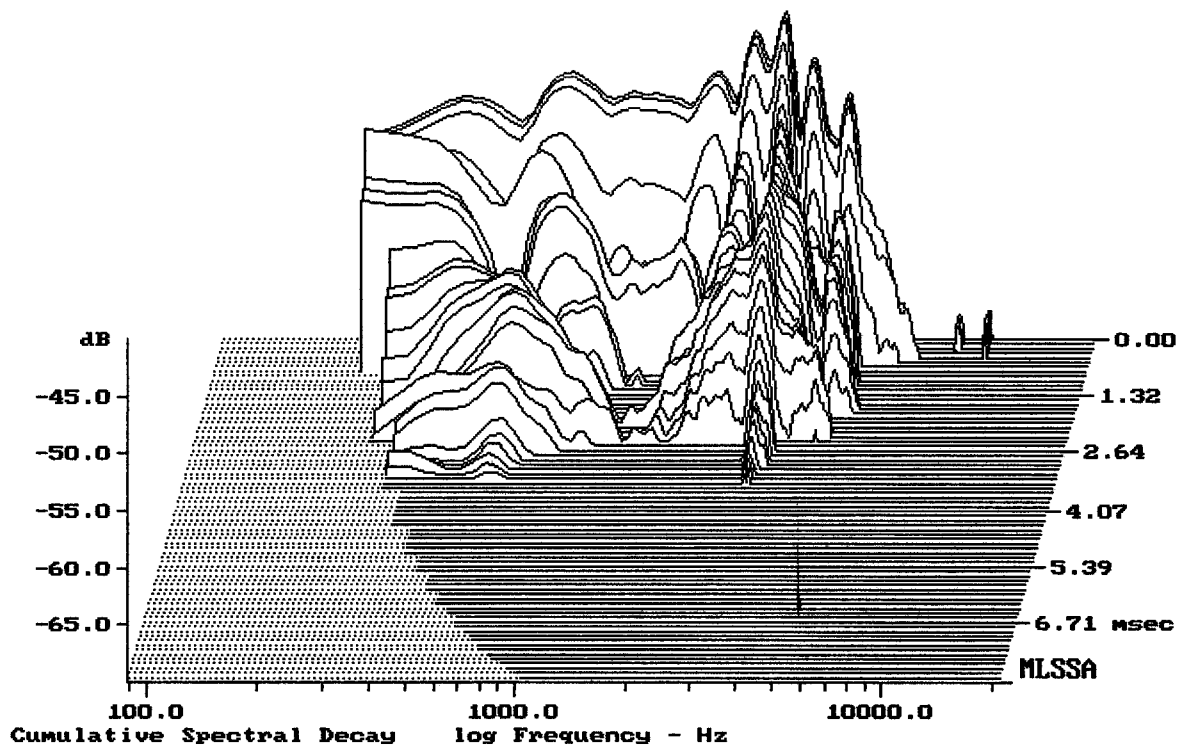

-68.77 dB, 3018 Hz (68), 3.410 msec (32)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	54.33	Hz
3	Re	5.80	Ohms[dc]
4	Res	131.68	Ohms
5	Qms	10.13	
6	Qes	0.45	
7	Qts	0.43	
8	L1	0.69	mH
9	L2	1.18	mH
10	R2	5.92	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	76.87	liters
13	Mms	44.19	grams
14	Cms	194	$\mu\text{M}/\text{Newton}$
15	B1	14.00	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.1% (-20% to -50% is recommended).

EMINENCE DELTA PRO 12

MLSSA: Parameters

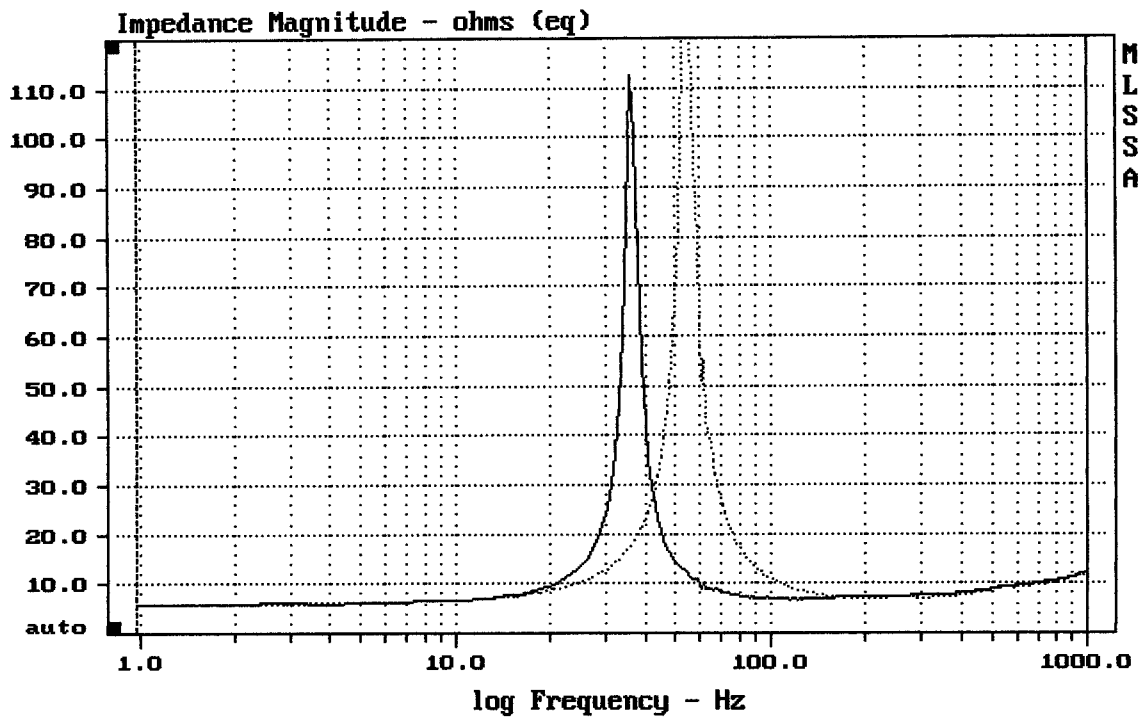

mean: 10.84, rms: 15.22, std: 10.68, max: 138.9, min: 5.934

MLSSA: Frequency Domain