

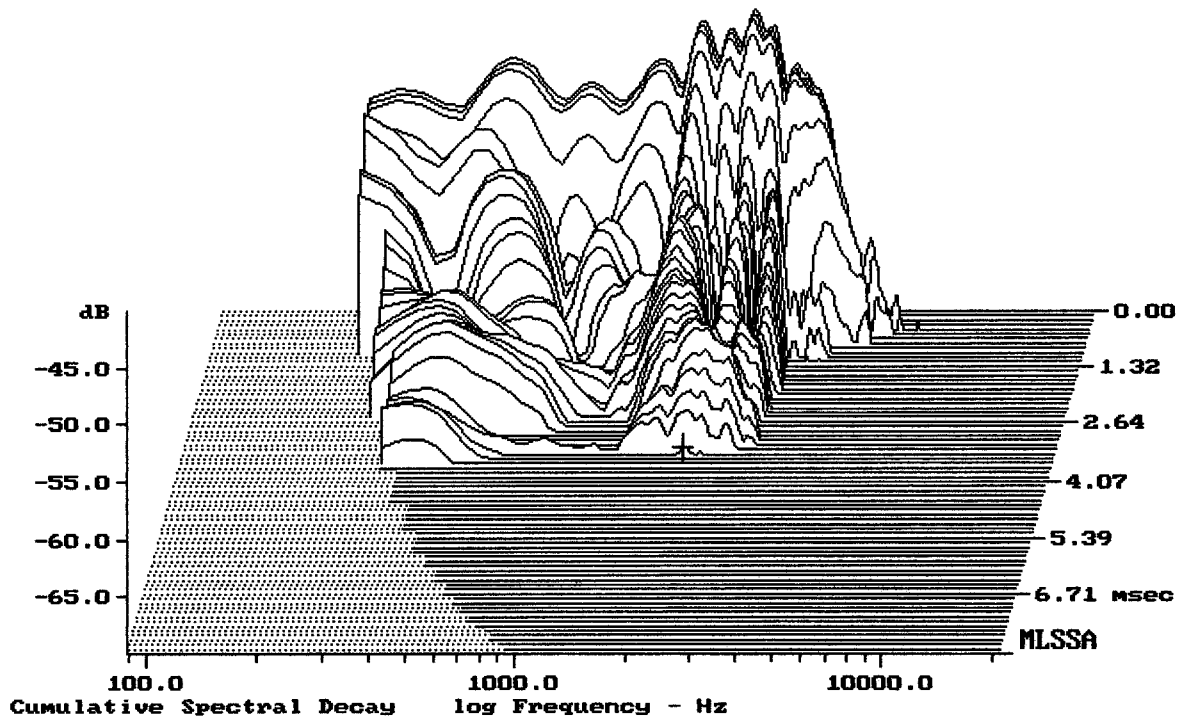

---

Level (100:4106 Hz) = 100.14 dB SPL/watt (8 ohms, @1.50 meters)

---

EMINENCE DELTA PRO 15

MLSSA: Frequency Domain



-69.45 dB, 2042 Hz (46), 3.410 msec (32)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	39.70	Hz
3	Re	5.62	Ohms[dc]
4	Res	106.10	Ohms
5	Qms	8.47	
6	Qes	0.45	
7	Qts	0.43	
8	L1	0.70	mH
9	L2	1.40	mH
10	R2	5.20	Ohms
11	RMSE-load	0.43	Ohms
12	Vas(Sd)	287.21	liters
13	Mms	57.49	grams
14	Cms	280	$\mu$ M/Newton
15	Bl	13.41	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm

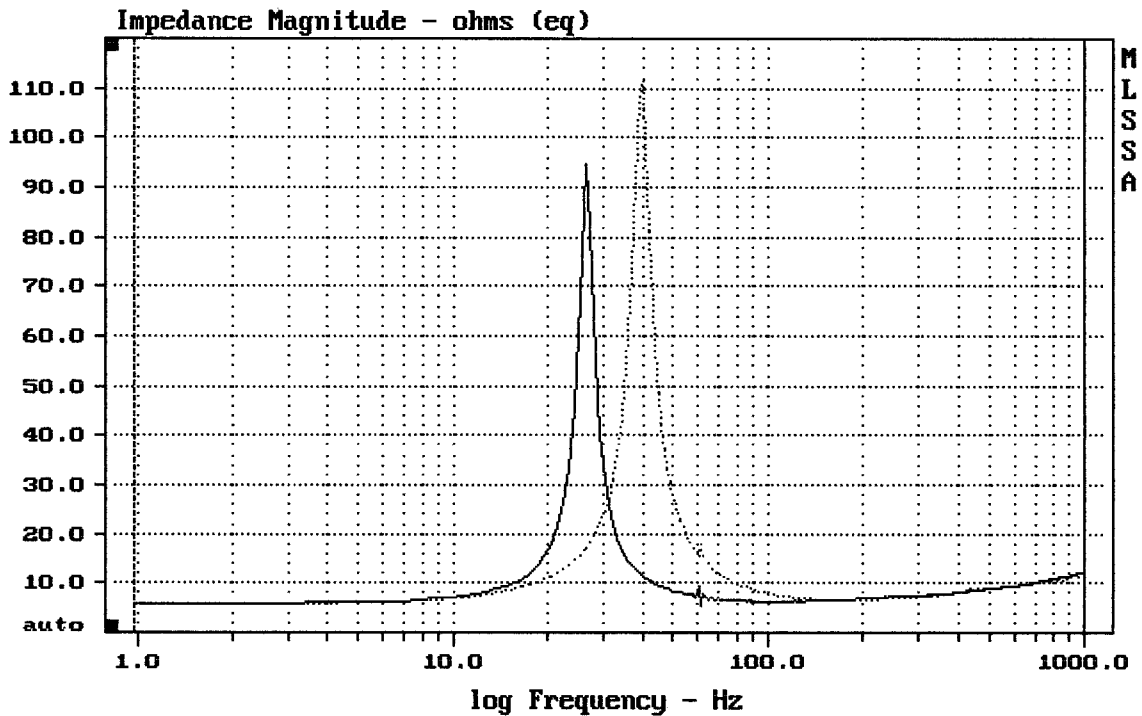
DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.2% (-20% to -50% is recommended).

EMINENCE DELTA PRO 15

MLSSA: Parameters



mean: 10.23, rms: 12.96, std: 7.956, max: 111.3, min: 5.681

MLSSA: Frequency Domain