


Level (100:5005 Hz) = 97.90 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE KAPPA 12

MLSSA: Frequency Domain

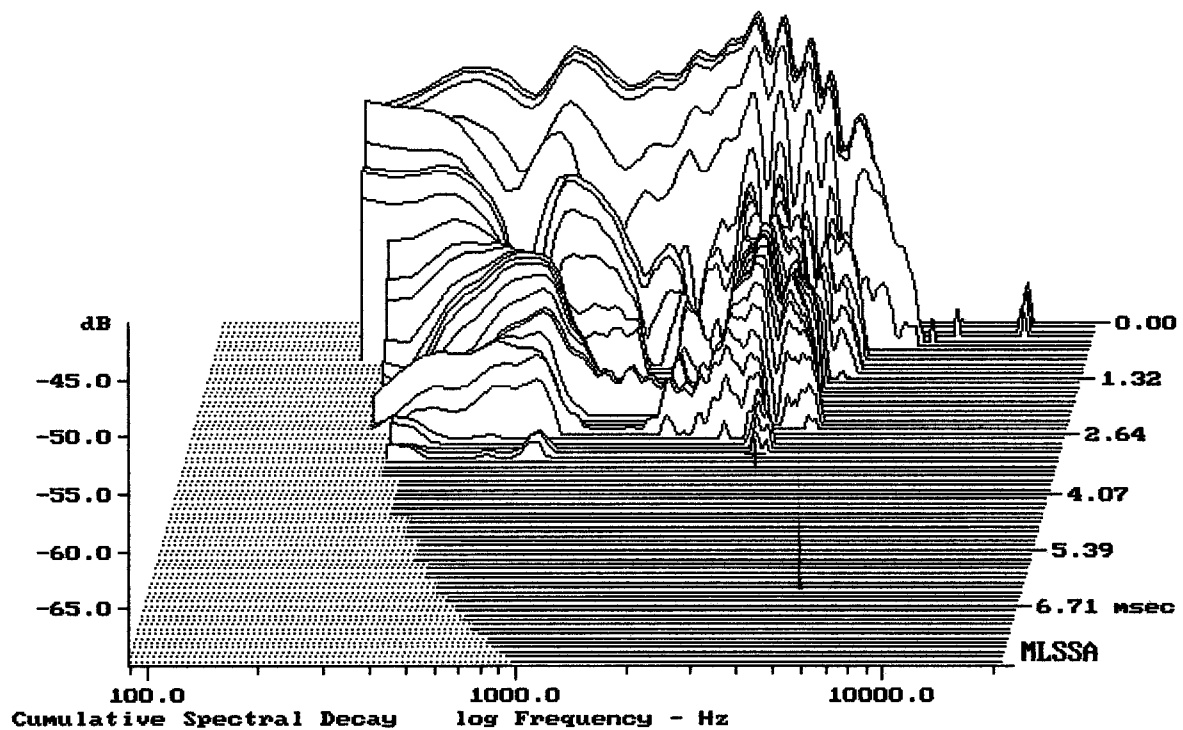

-69.68 dB, 3107 Hz (70), 3.190 msec (30)

Line	Parameter	Value	Units
1	RMSE-free	0.48	Ohms
2	Fs	48.78	Hz
3	Re	5.42	Ohms[dc]
4	Res	121.01	Ohms
5	Qms	7.17	
6	Qes	0.32	
7	Qts	0.31	
8	L1	0.77	mH
9	L2	1.32	mH
10	R2	4.27	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	101.22	liters
13	Mms	41.63	grams
14	Cms	256	$\mu\text{M}/\text{Newton}$
15	B1	14.67	Tesla-M
16	SPLref(Sd)	97.5	dB[Re]
17	Rub-index	0.04	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.3% (-20% to -50% is recommended).

EMINENCE KAPPA 12

MLSSA: Parameters

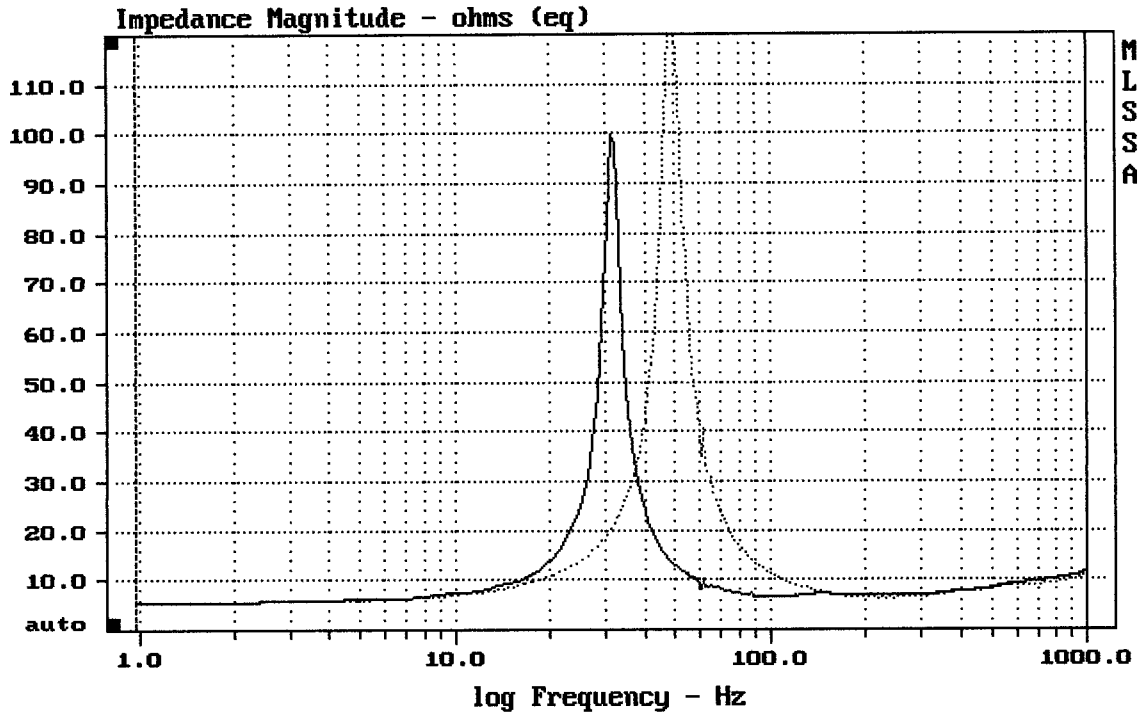

mean: 10.61, rms: 15.21, std: 10.9, max: 125.5, min: 5.554

MLSSA: Frequency Domain