


Level (100:2308 Hz) = 93.92 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE KAPPALITE 3012LF

9-3-89 1:22 PM

MLSSA: Frequency Domain

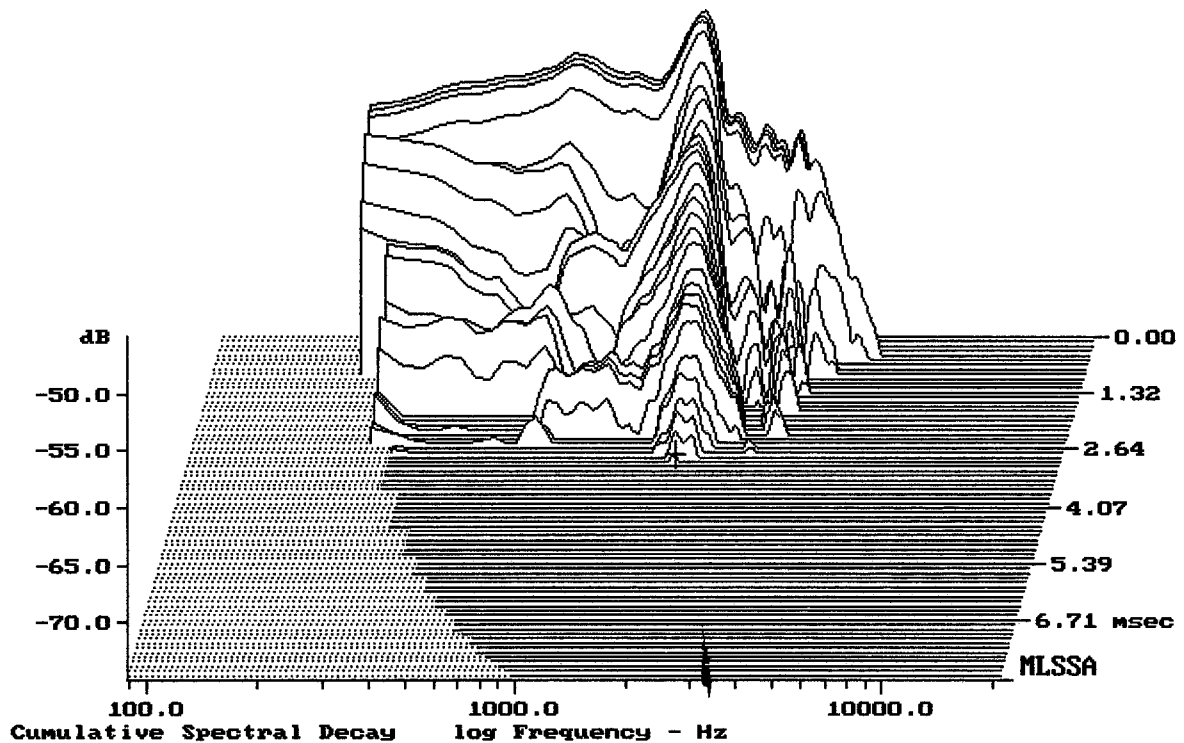

-74.31 dB, 1864 Hz (42), 2.970 msec (28)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	36.99	Hz
3	Re	5.51	Ohms[dc]
4	Res	128.73	Ohms
5	Qms	9.26	
6	Qes	0.40	
7	Qts	0.38	
8	L1	0.95	mH
9	L2	1.53	mH
10	R2	5.24	Ohms
11	RMSE-load	0.62	Ohms
12	Vas(Sd)	122.84	liters
13	Mms	64.38	grams
14	Cms	288	$\mu\text{M}/\text{Newton}$
15	B1	14.43	Tesla-M
16	SPLref(Sd)	93.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.8% (-20% to -50% is recommended).

EMINENCE KAPPALITE 3012LF

MLSSA: Parameters

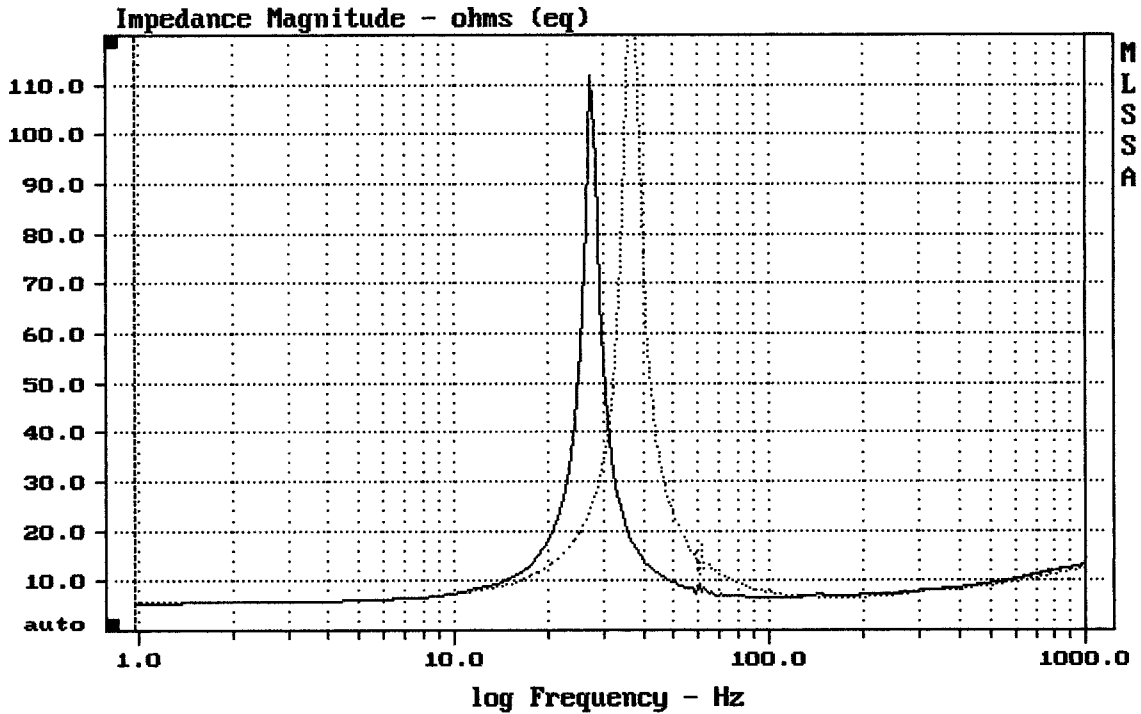

mean: 10.77, rms: 14.05, std: 9.028, max: 133.4, min: 5.672

MLSSA: Frequency Domain