


Level (100:3207 Hz) = 95.35 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE KAPPA PRO 12

MLSSA: Frequency Domain

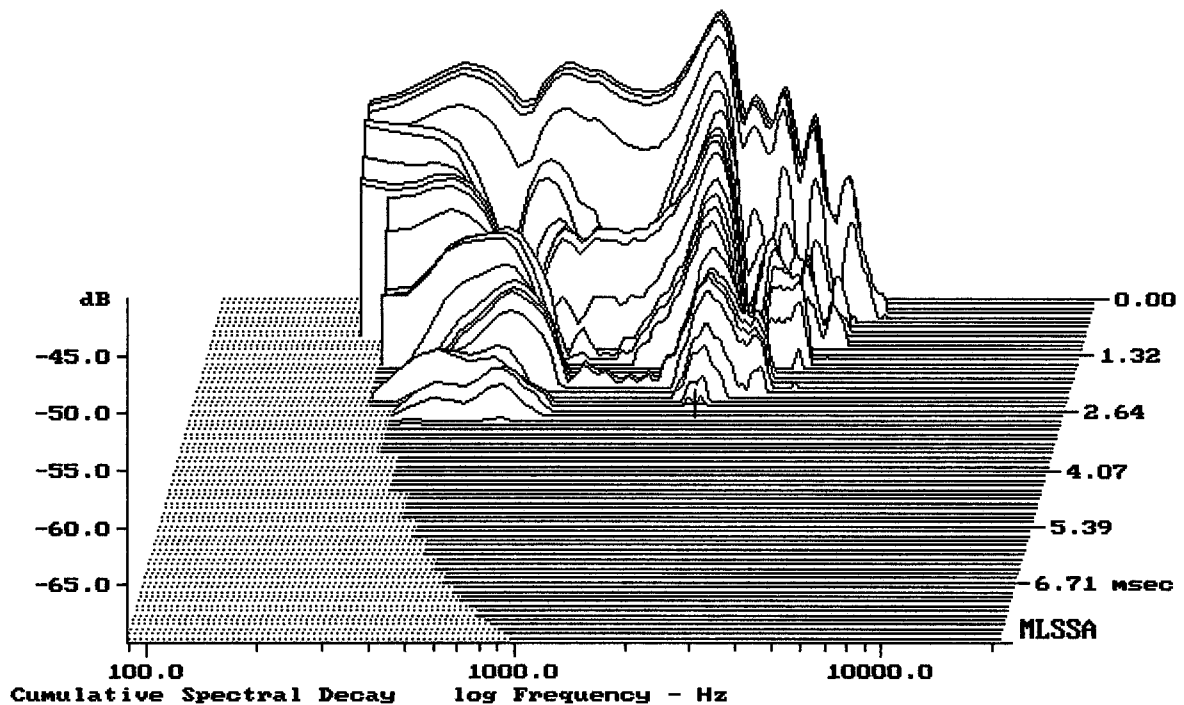

-69.84 dB, 2042 Hz (46), 2.530 msec (24)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	49.39	Hz
3	Re	5.85	Ohms[dc]
4	Res	216.37	Ohms
5	Qms	11.98	
6	Qes	0.32	
7	Qts	0.32	
8	L1	1.15	mH
9	L2	1.56	mH
10	R2	6.05	Ohms
11	RMSE-load	0.71	Ohms
12	Vas(Sd)	73.27	liters
13	Mms	56.11	grams
14	Cms	185	$\mu\text{M}/\text{Newton}$
15	B1	17.73	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).

EMINENCE KAPPA PRO 12

MLSSA: Parameters

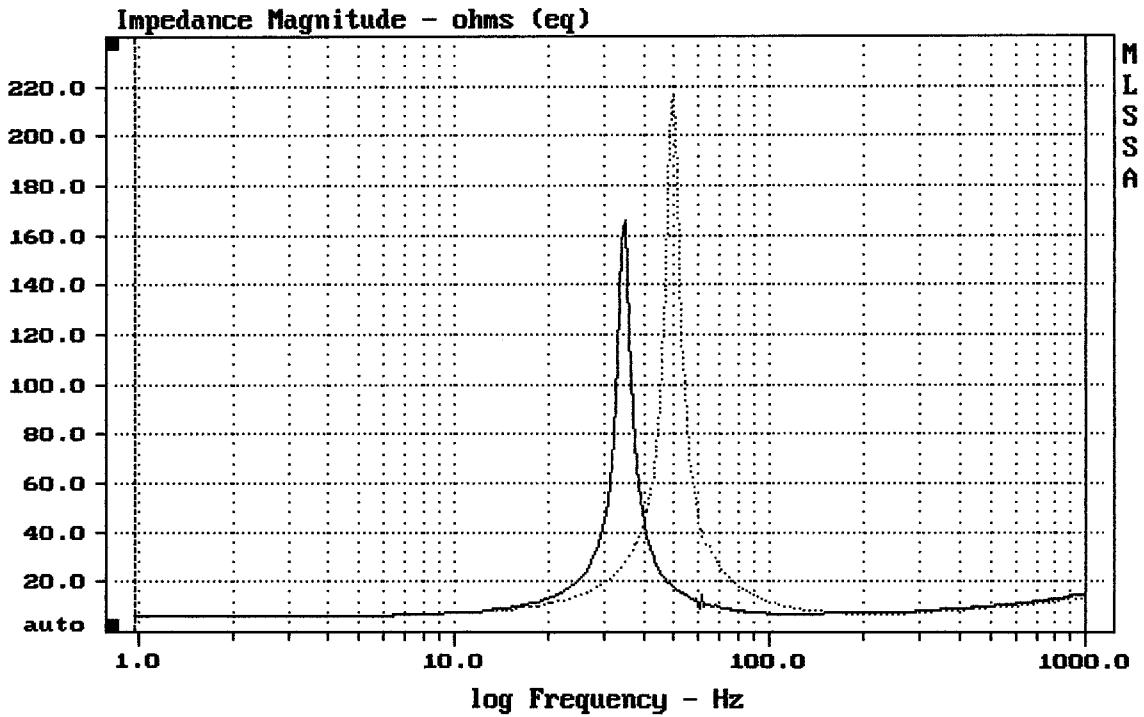

mean: 12.84, rms: 20.32, std: 15.75, max: 216.5, min: 5.966

MLSSA: Frequency Domain