


Level (100:4705 Hz) = 99.64 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE KAPPALITE 3012HO

MLSSA: Frequency Domain

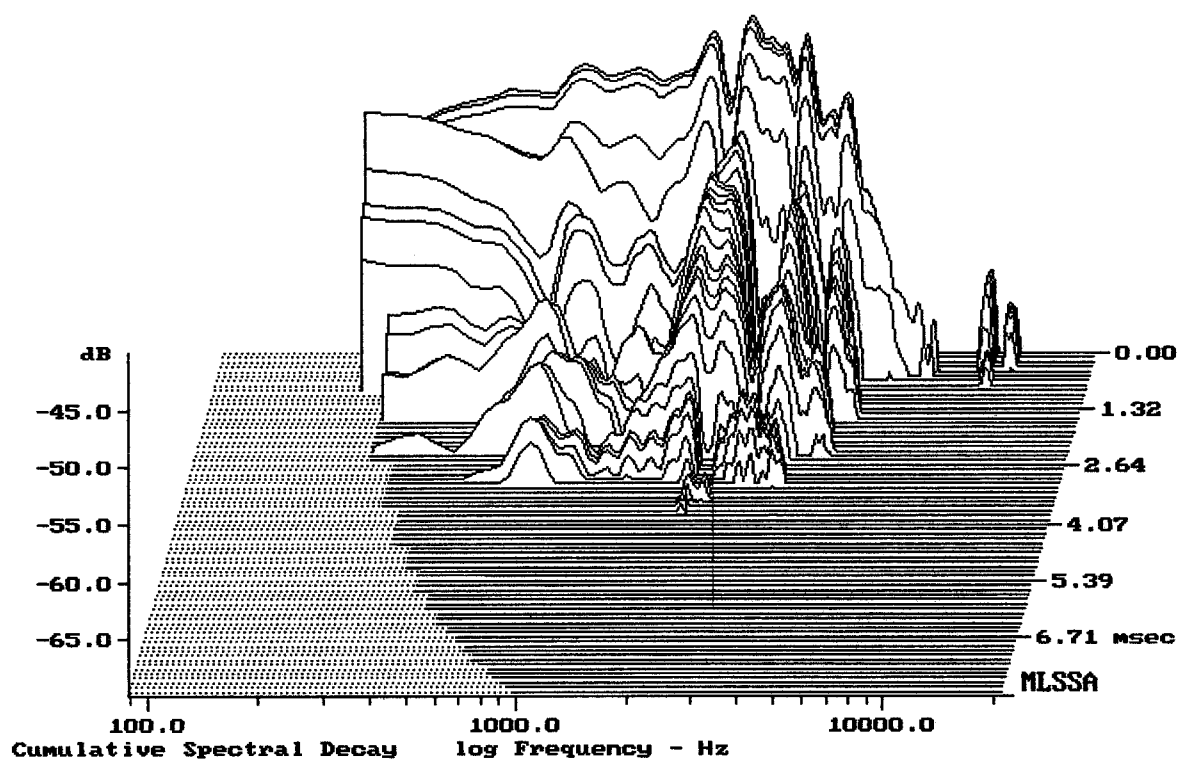

-69.38 dB, 2086 Hz (47), 3.630 msec (34)

Line	Parameter	Value	Units
1	RMSE-free	0.85	Ohms
2	Fs	48.75	Hz
3	Re	5.46	Ohms[dc]
4	Res	160.19	Ohms
5	Qms	10.13	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.46	mH
9	L2	0.78	mH
10	R2	4.72	Ohms
11	RMSE-load	0.85	Ohms
12	Vas(Sd)	94.58	liters
13	Mms	44.62	grams
14	Cms	239	$\mu\text{M}/\text{Newton}$
15	B1	14.70	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.1% (-20% to -50% is recommended).

EMINENCE KAPPALITE 3012HO

MLSSA: Parameters

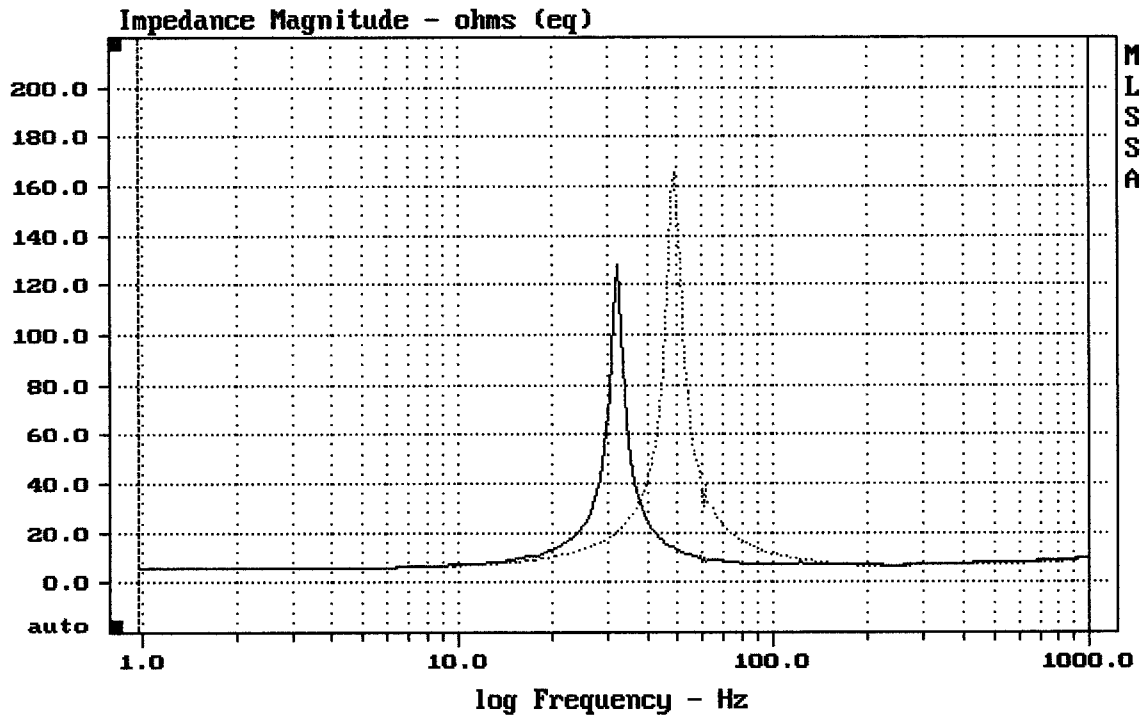

mean: 10.08, rms: 16.13, std: 12.59, max: 165.7, min: 5.602

MLSSA: Frequency Domain