


Level (100:2808 Hz) = 95.39 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE OMEGA PRO 15

MLSSA: Frequency Domain

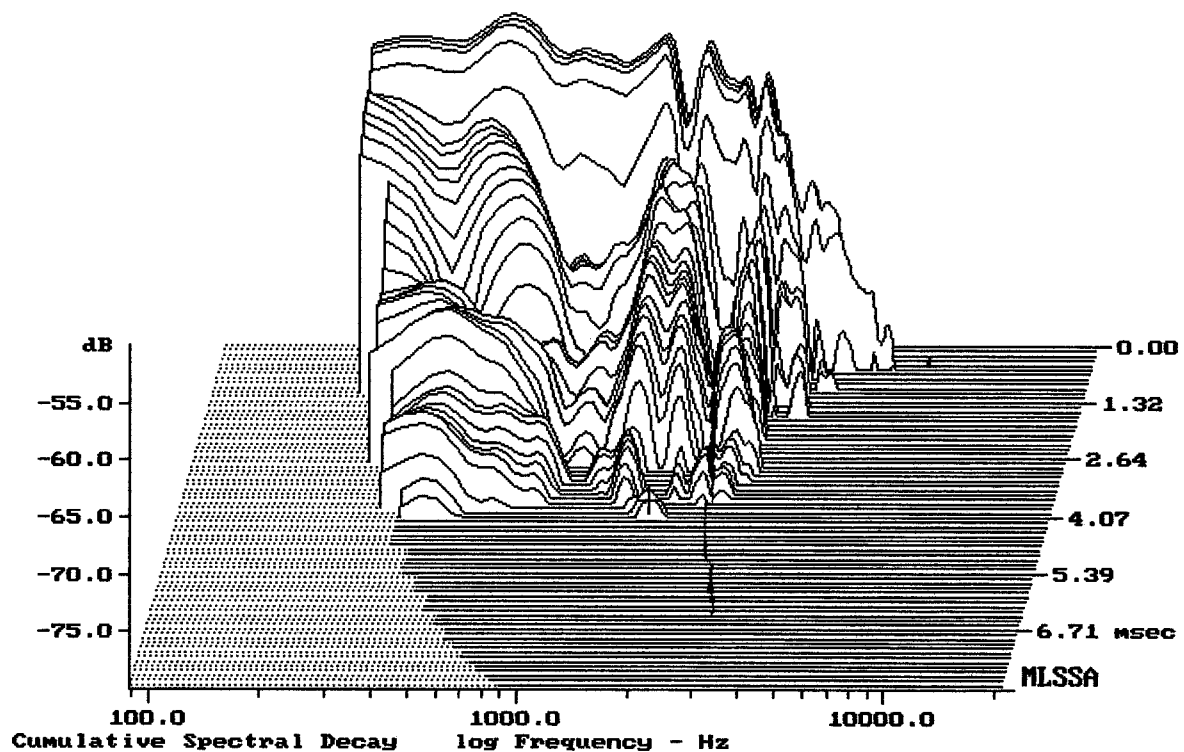

-78.45 dB, 1687 Hz (38), 4.070 msec (38)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.57	Ohms
2	Fs	33.16	Hz
3	Re	5.35	Ohms[dc]
4	Res	189.66	Ohms
5	Qms	11.30	
6	Qes	0.32	
7	Qts	0.31	
8	L1	1.37	mH
9	L2	2.21	mH
10	R2	7.96	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	260.93	liters
13	Mms	90.70	grams
14	Cms	254	$\mu\text{M}/\text{Newton}$
15	B1	17.81	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).

EMINENCE OMEGA PRO 15

MLSSA: Parameters

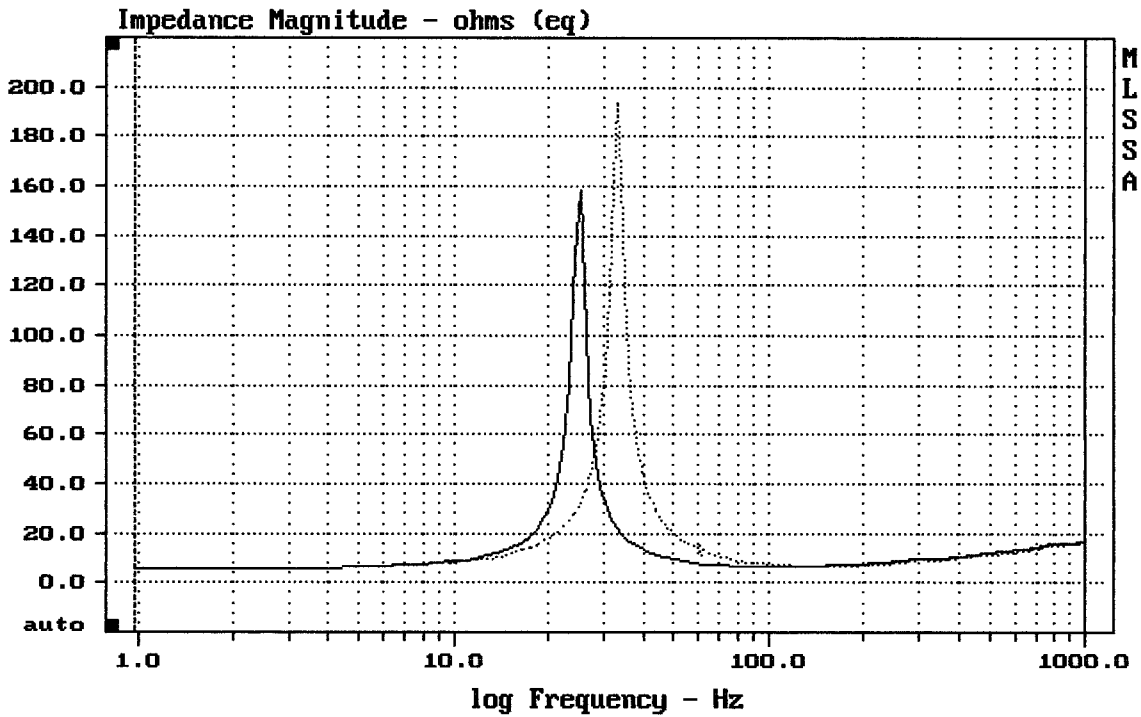

mean: 12.98, rms: 17.47, std: 11.69, max: 193.4, min: 5.655

MLSSA: Frequency Domain