

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.26	Ohms
2	Fs	104.93	Hz
3	Re	6.64	Ohms[dc]
4	Res	73.24	Ohms
5	Qms	12.43	
6	Qes	1.13	
7	Qts	1.03	
8	L1	0.36	mH
9	L2	0.90	mH
10	R2	6.13	Ohms
11	RMSE-load	0.71	Ohms
12	Vas(Sd)	34.11	liters
13	Mms	24.71	grams
14	Cms	93	$\mu$ M/Newton
15	B1	9.80	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (60.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -43.3% (-20% to -50% is recommended).


FANE AX12

MLSSA: Parameters

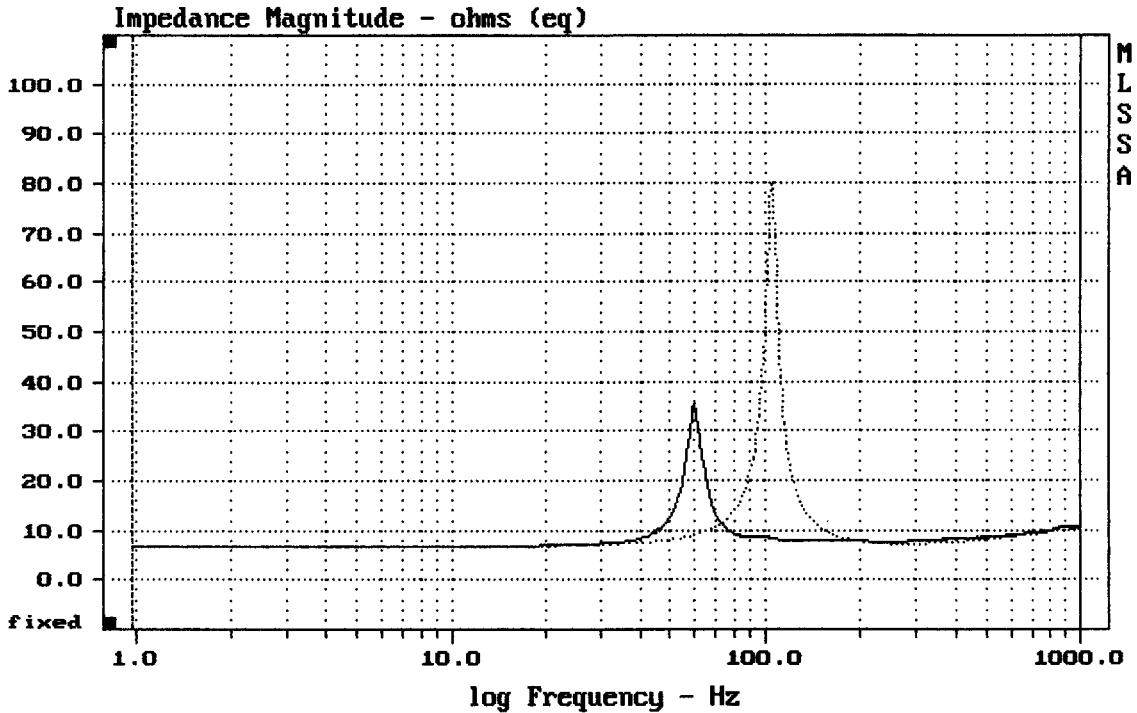

mean: 10.01, rms: 12.3, std: 7.151, max: 80.07, min: 6.652


MLSSA: Frequency Domain

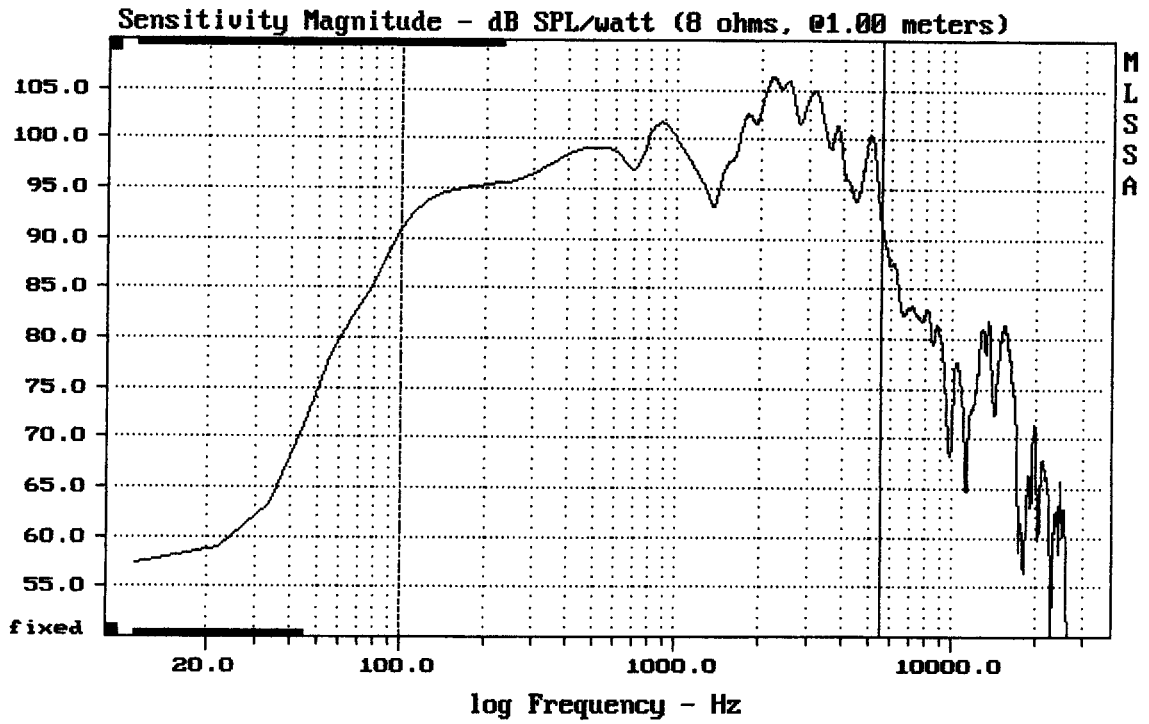

Level (100:5504 Hz) = 99.60 dB SPL/watt (8 ohms, @1.00 meters)

FANE AX12

MLSSA: Frequency Domain

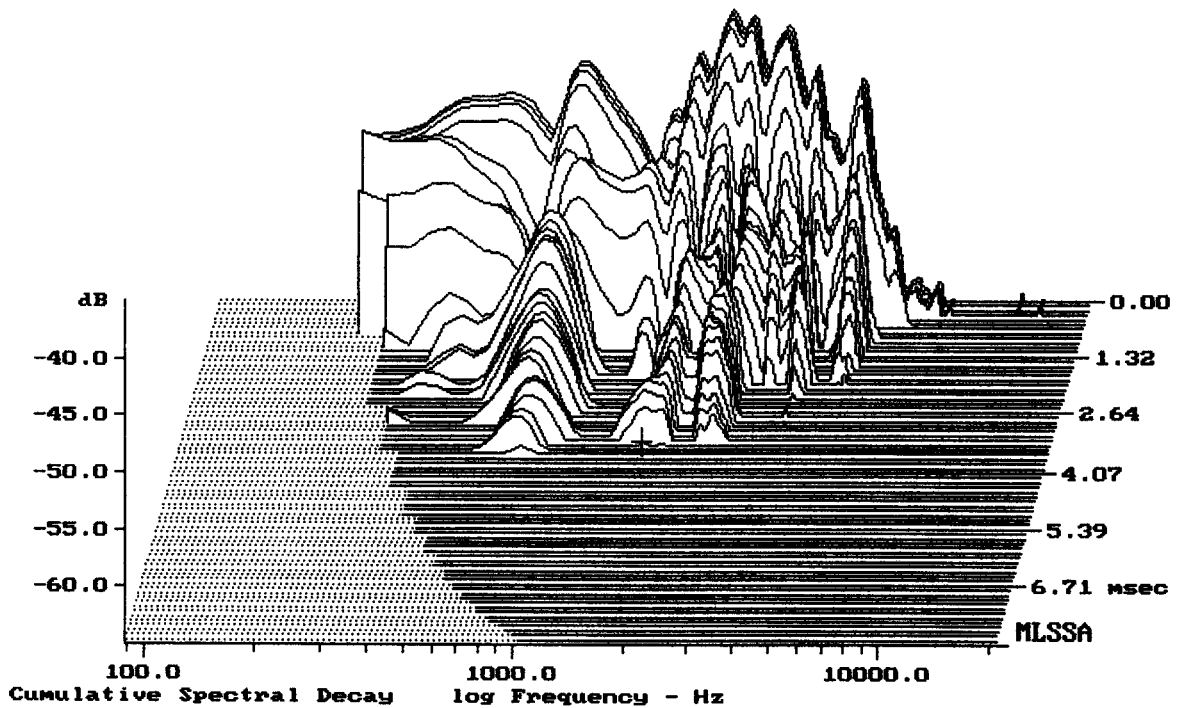

-64.77 dB, 1598 Hz (36), 3.410 msec (32)