


Level (100:6004 Hz) = 99.26 dB SPL/watt (8 ohms, @1.00 meters)

FANE ALNICO 12 NEW

11-21-88 6:10 PM

MLSSA: Frequency Domain

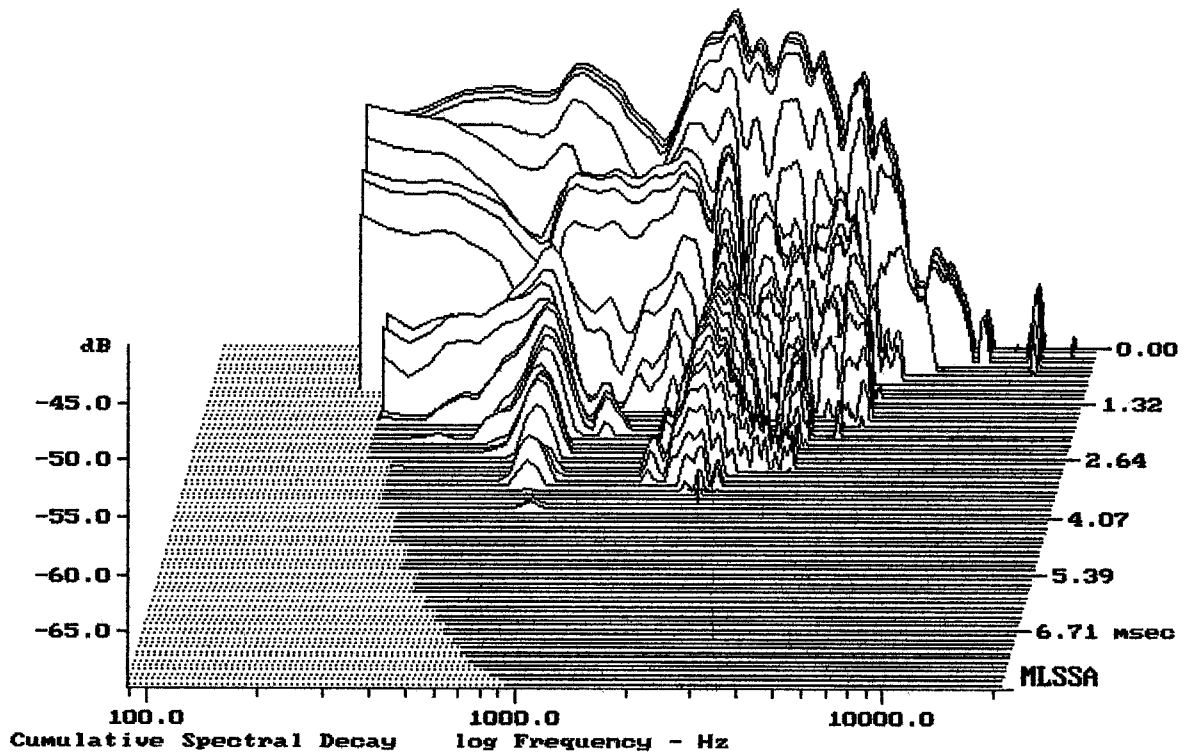

-69.57 dB, 2219 Hz (50), 3.520 msec (33)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.19	Ohms
2	Fs	98.07	Hz
3	Re	6.62	Ohms[dc]
4	Res	82.26	Ohms
5	Qms	12.71	
6	Qes	1.02	
7	Qts	0.95	
8	L1	0.53	mH
9	L2	0.86	mH
10	R2	4.58	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	39.01	liters
13	Mms	26.73	grams
14	Cms	99	μ M/Newton
15	Bl	10.32	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.8% (-20% to -50% is recommended).

FANE ALNICO 12 NEW

MLSSA: Parameters

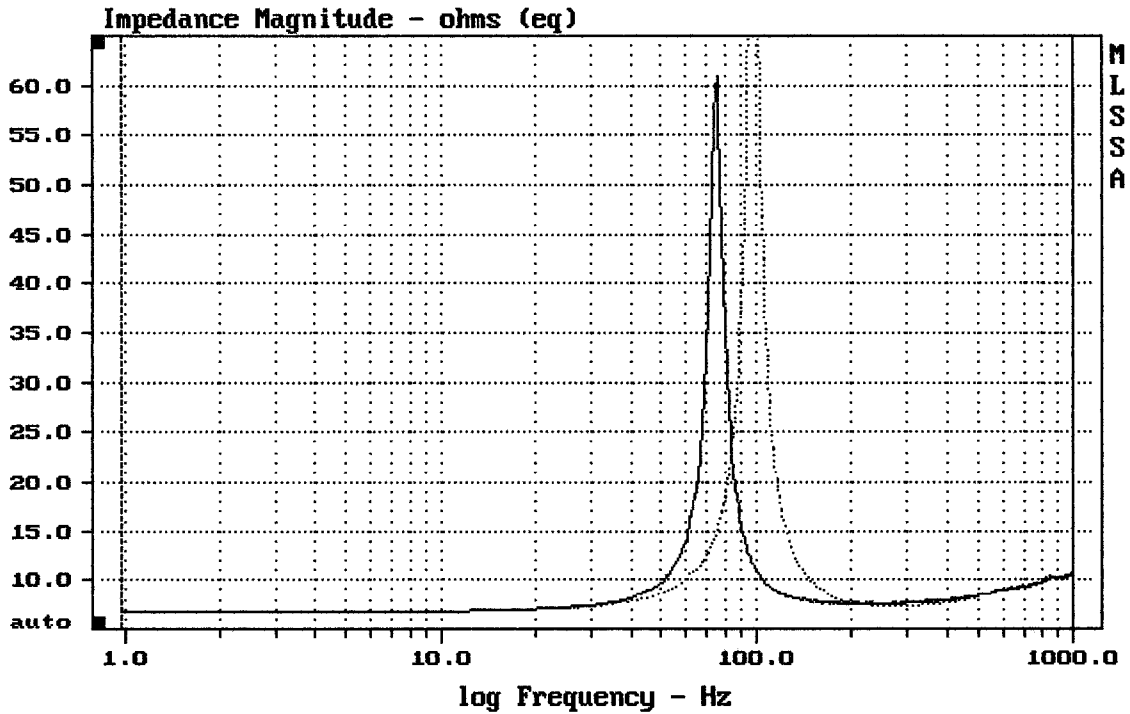

mean: 10.21, rms: 12.81, std: 7.741, max: 87.99, min: 6.729

DTTO

11-20-88 5:43 PM

MLSSA: Frequency Domain