


Level (100:9000 Hz) = 98.74 dB SPL/watt (8 ohms, @1.50 meters)

AX15-300B

MLSSA: Frequency Domain

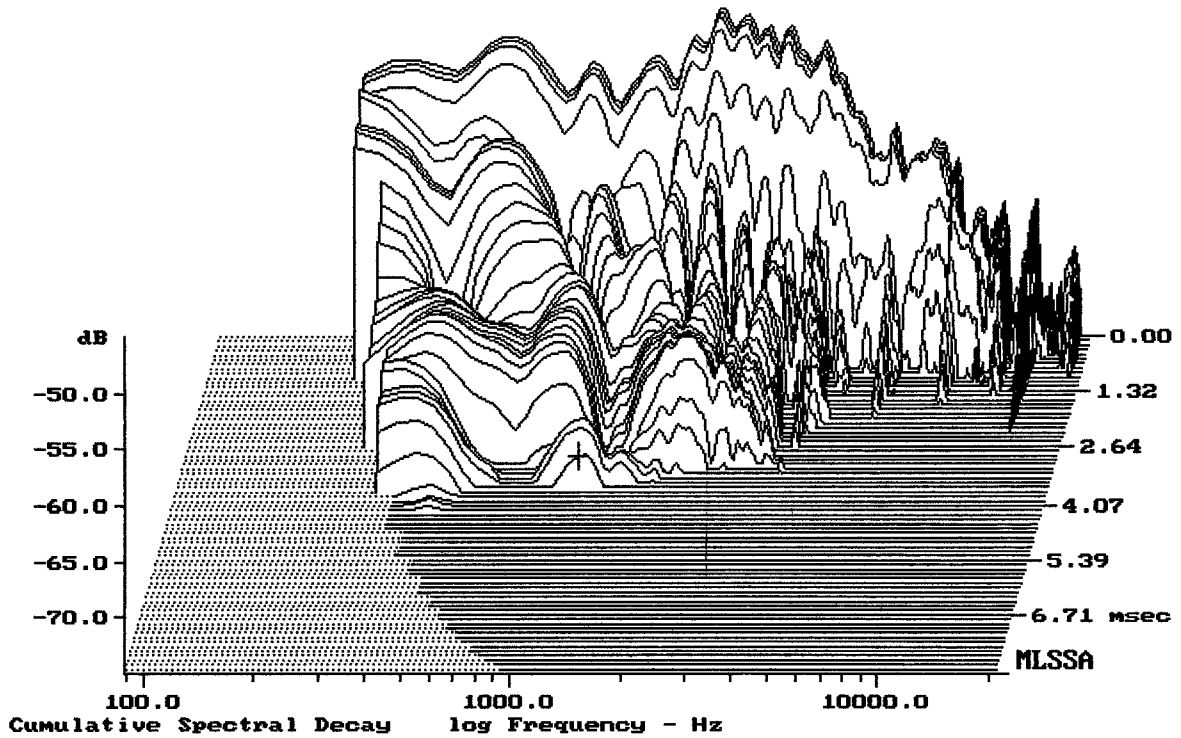

-72.17 dB, 1110 Hz (25), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	56.90	Hz
3	Re	6.32	Ohms[dc]
4	Res	135.24	Ohms
5	Qms	10.00	
6	Qes	0.47	
7	Qts	0.45	
8	L1	0.35	mH
9	L2	1.77	mH
10	R2	4.78	Ohms
11	RMSE-load	0.80	Ohms
12	Vas(Sd)	124.11	liters
13	Mms	60.94	grams
14	Cms	128	$\mu\text{M}/\text{Newton}$
15	B1	17.16	Tesla-M
16	SPLref(Sd)	98.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.2% (-20% to -50% is recommended).

FANE AX15-300B

MLSSA: Parameters

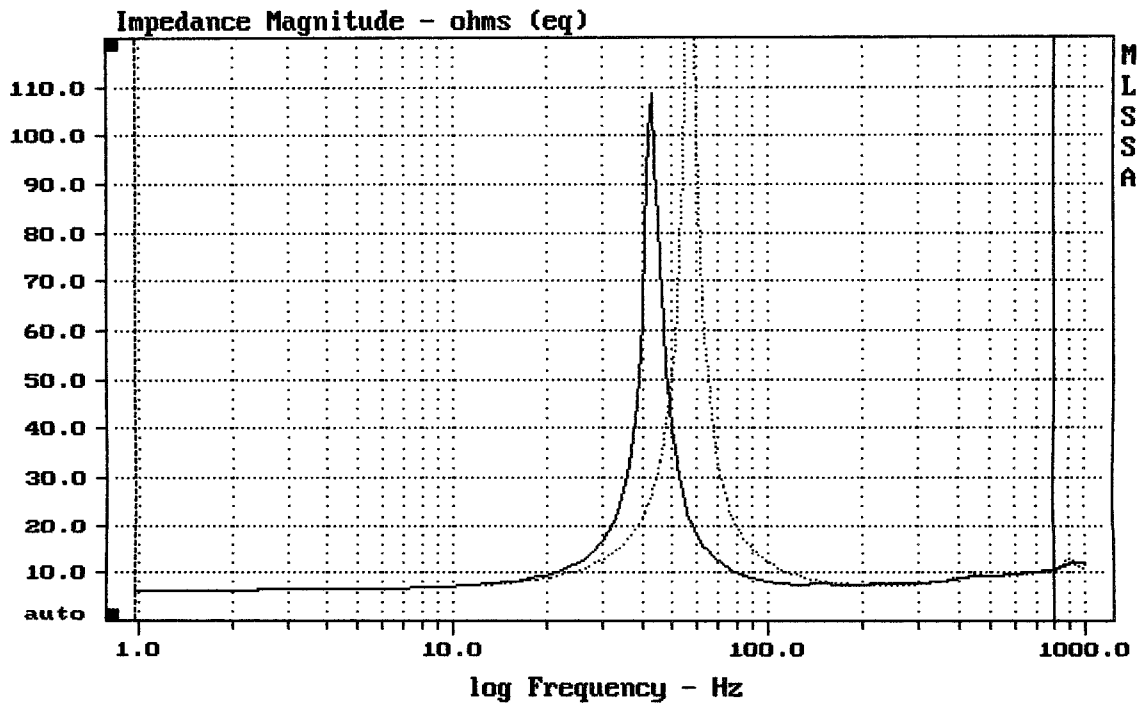

mean: 11.49, rms: 16.98, std: 12.5, max: 141.2, min: 6.309

MLSSA: Frequency Domain