


Level (100:5005 Hz) = 97.71 dB SPL/watt (4 ohms, @1.50 meters)

AX15-300BASS/4

7-9-89 7:07 PM

MLSSA: Frequency Domain

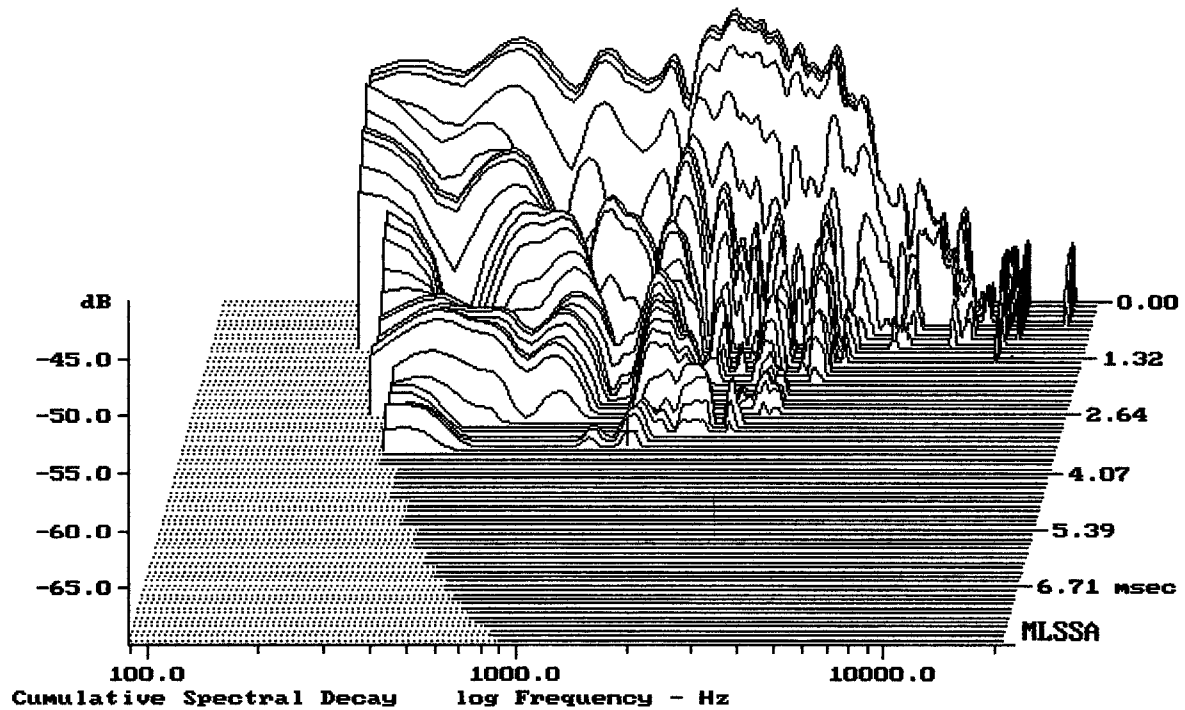

-68.74 dB, 1420 Hz (32), 3.410 msec (32)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.96	Ohms
2	Fs	59.72	Hz
3	Re	3.85	Ohms[dc]
4	Res	55.54	Ohms
5	Qms	9.30	
6	Qes	0.65	
7	Qts	0.60	
8	L1	0.21	mH
9	L2	0.85	mH
10	R2	3.35	Ohms
11	RMSE-load	0.36	Ohms
12	Vas(Sd)	138.05	liters
13	Mms	52.87	grams
14	Cms	134	$\mu\text{M}/\text{Newton}$
15	B1	10.88	Tesla-M
16	SPLref(Sd)	98.4	dB[Re]
17	Rub-index	0.30	

Method: Mass-loaded (60.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.8% (-20% to -50% is recommended).

AX15-300BASS-4

MLSSA: Parameters

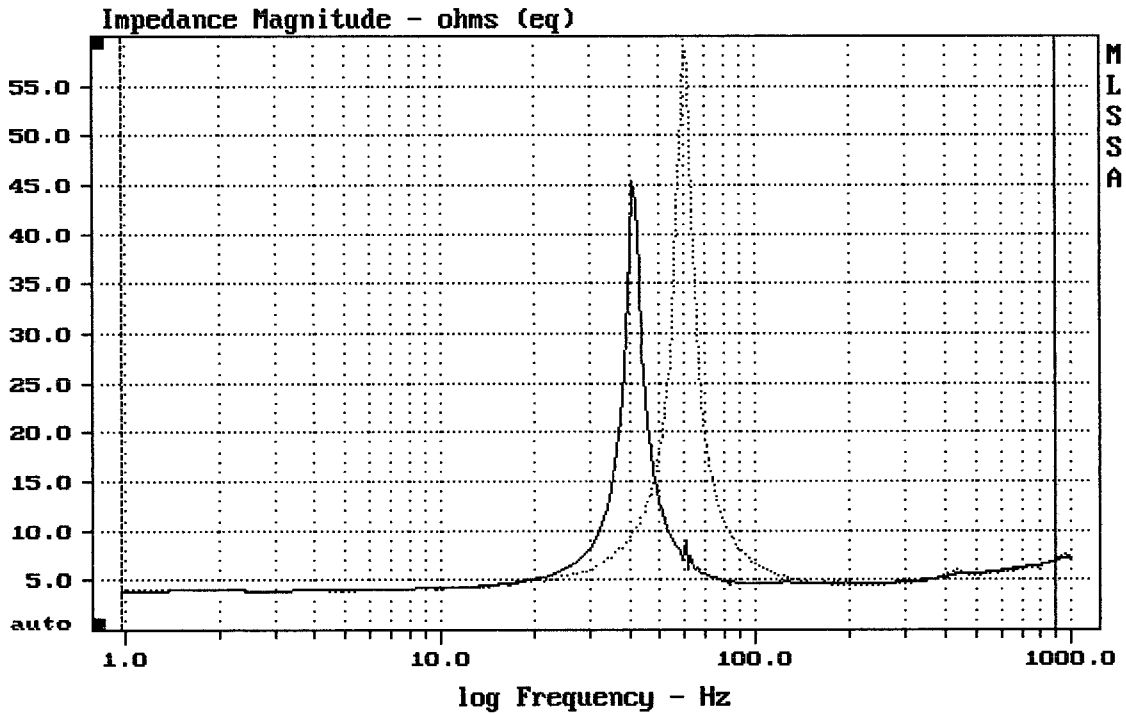

mean: 6.485, rms: 8.249, std: 5.099, max: 59.6, min: 3.934

7-7-89 10:53 PM

MLSSA: Frequency Domain