

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.88	Ohms
2	Fs	47.52	Hz
3	Re	5.72	Ohms[dc]
4	Res	162.19	Ohms
5	Qms	7.72	
6	Qes	0.27	
7	Qts	0.26	
8	L1	1.34	mH
9	L2	1.78	mH
10	R2	6.45	Ohms
11	RMSE-load	0.77	Ohms
12	Vas(Sd)	101.21	liters
13	Mms	107.12	grams
14	Cms	105	μ M/Newton
15	B1	25.93	Tesla-M
16	SPLref(Sd)	97.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.2% (-20% to -50% is recommended).


FANE COL15B NEW

MLSSA: Parameters

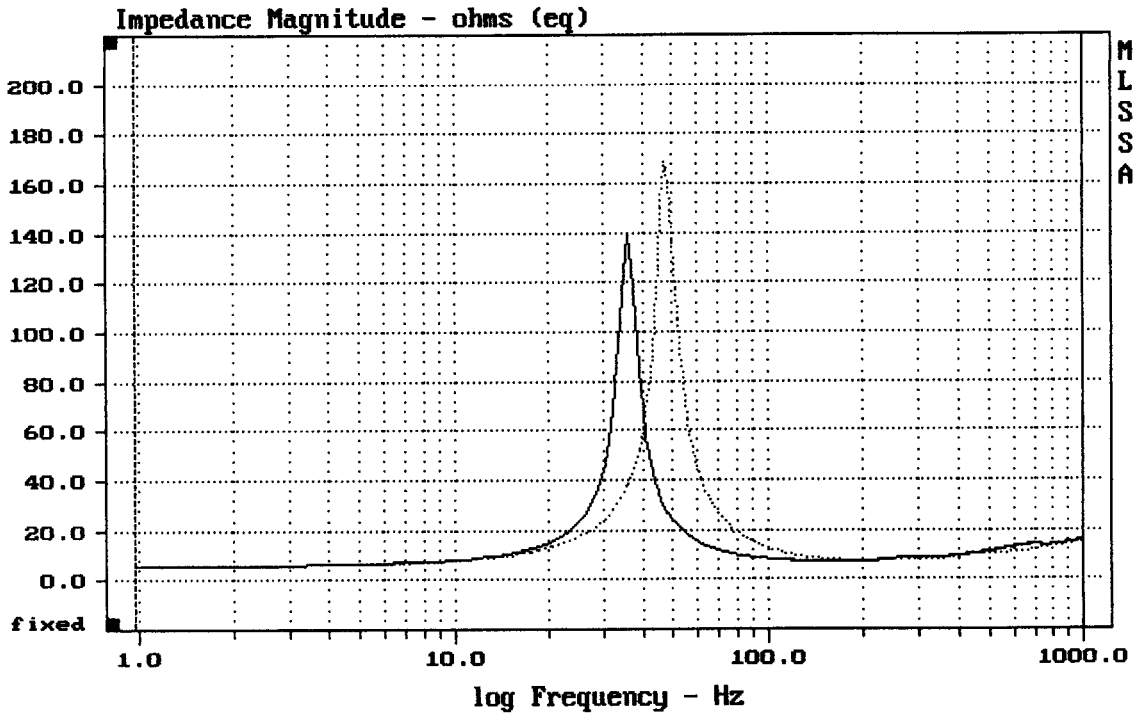

mean: 13.38, rms: 19.37, std: 14.01, max: 168.4, min: 5.828


MLSSA: Frequency Domain

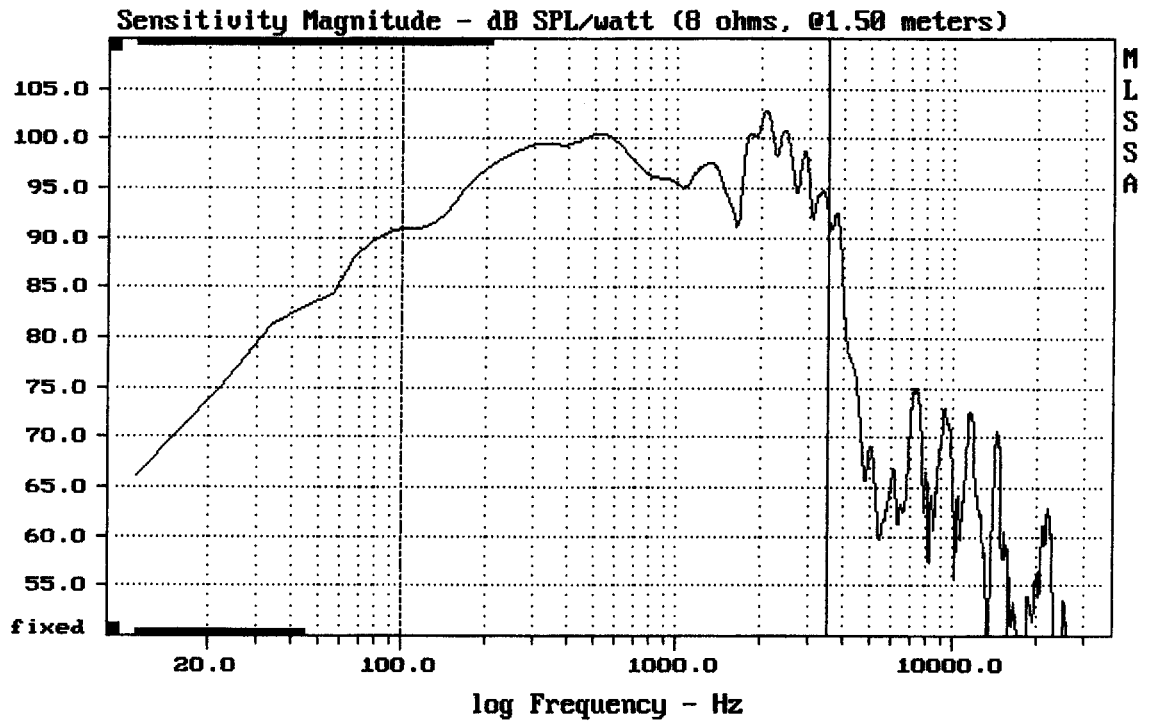

Level (100:3496 Hz) = 97.76 dB SPL/watt (8 ohms, @1.50 meters)

FANE COL15B NEW

MLSSA: Frequency Domain

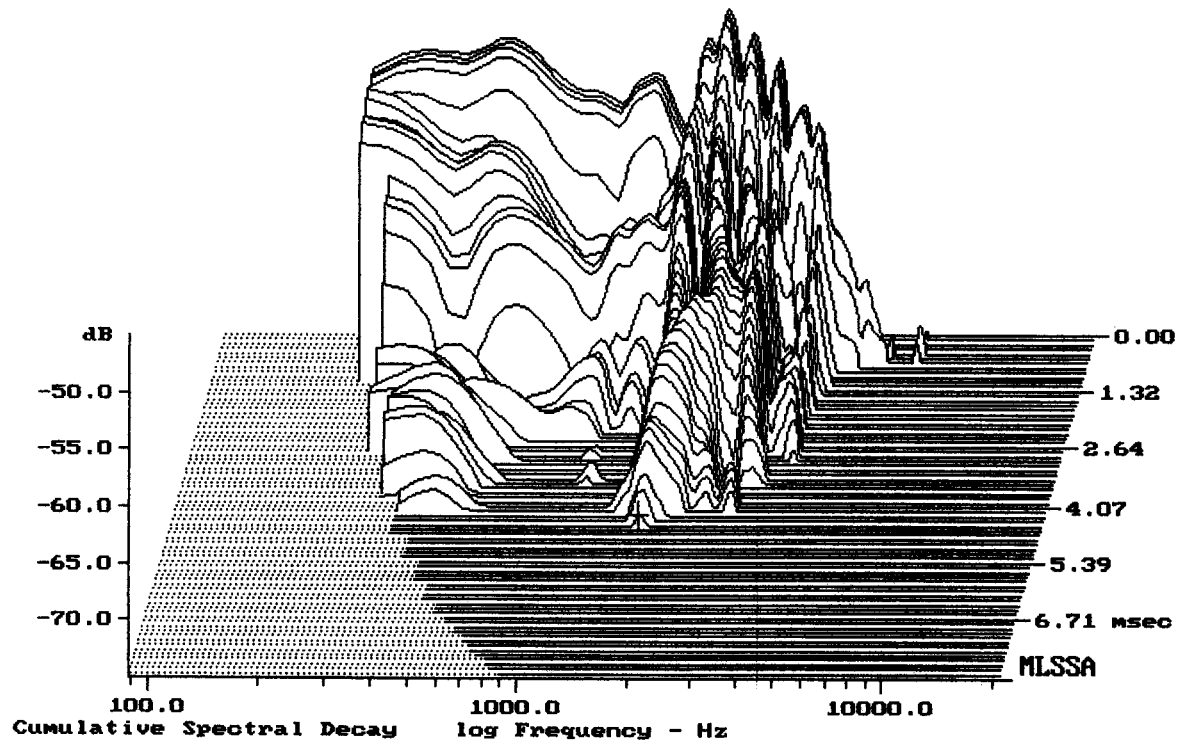

-74.11 dB, 1642 Hz (37), 4.510 msec (42)