


Level (100:2500 Hz) = 100.11 dB SPL/watt (16 ohms, @1.50 meters)

FANE crescendo 15/160 - 160hm - druhý kus

MLSSA: Frequency Domain

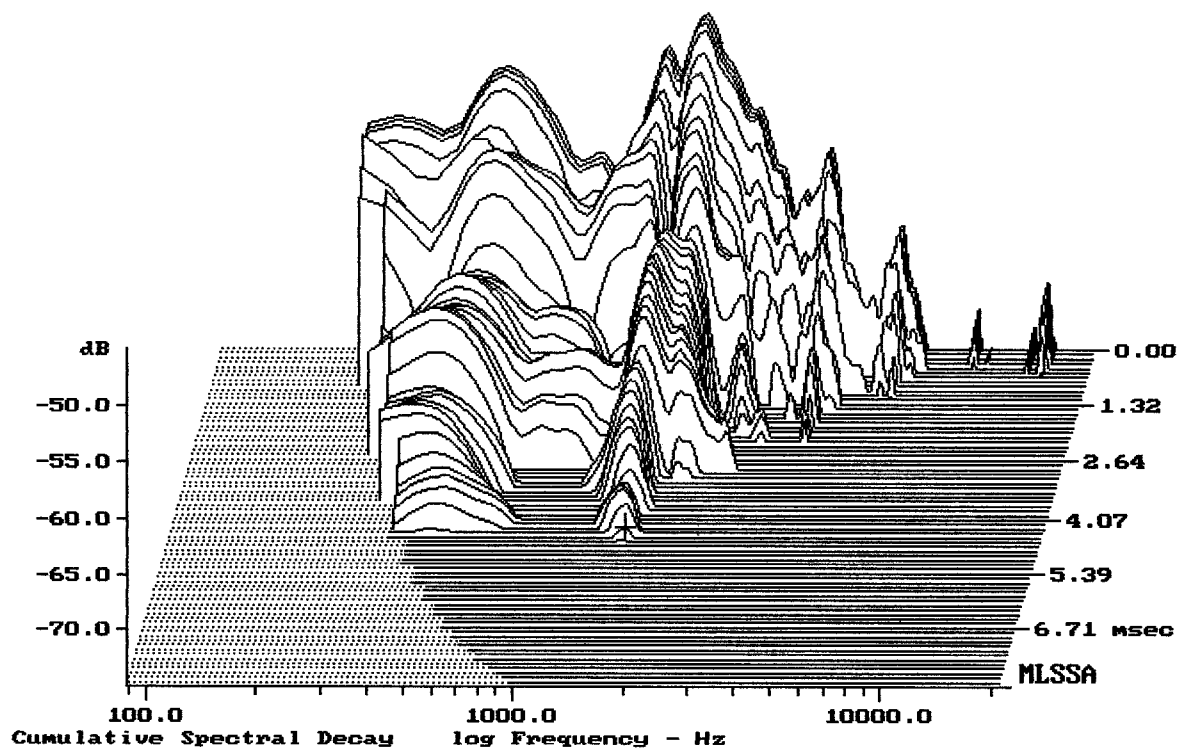

-74.01 dB, 1554 Hz (35), 4.510 msec (42)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.73	Ohms
2	Fs	52.56	Hz
3	Re	14.31	Ohms[dc]
4	Res	443.62	Ohms
5	Qms	11.73	
6	Qes	0.38	
7	Qts	0.37	
8	L1	1.63	mH
9	L2	3.45	mH
10	R2	10.90	Ohms
11	RMSE-load	2.04	Ohms
12	Vas(Sd)	108.92	liters
13	Mms	86.48	grams
14	Cms	106	$\mu\text{M}/\text{Newton}$
15	B1	32.87	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.0% (-20% to -50% is recommended).

FANE CRESCENDO 15/160

MLSSA: Parameters

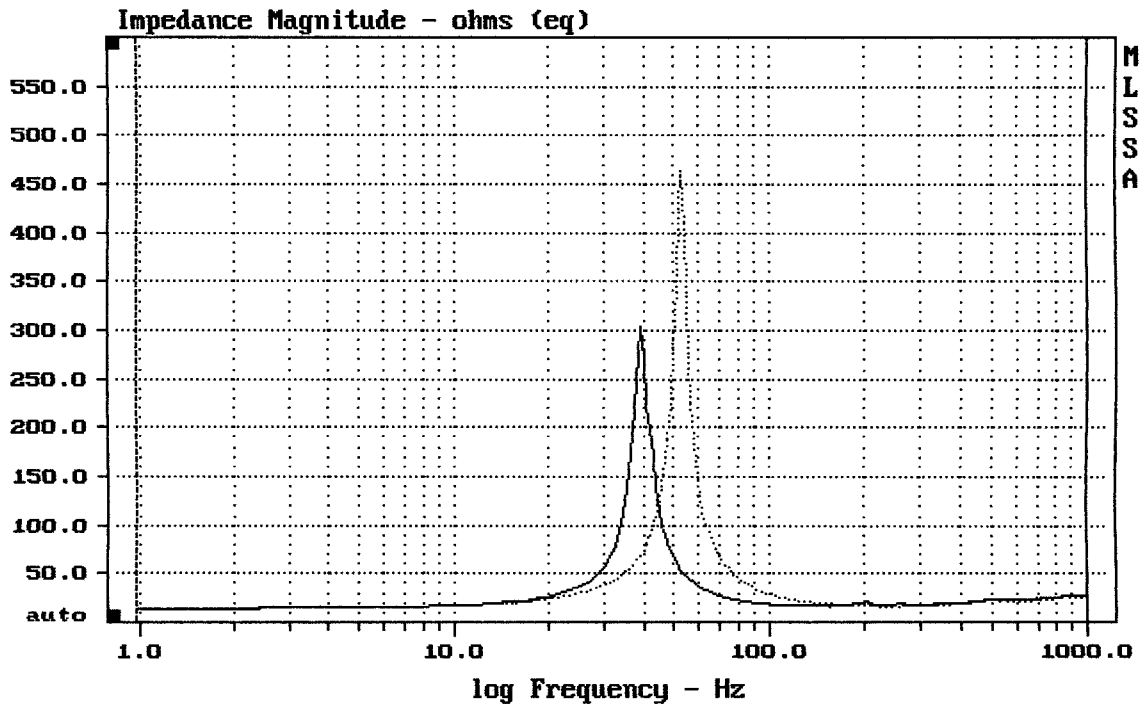

mean: 27.29, rms: 43.16, std: 33.44, max: 462.8, min: 14.49

DTTO

MLSSA: Frequency Domain