


Level (78:5904 Hz) = 91.42 dB SPL/watt (4 ohms, @1.00 meters)

FANE DX12

MLSSA: Frequency Domain

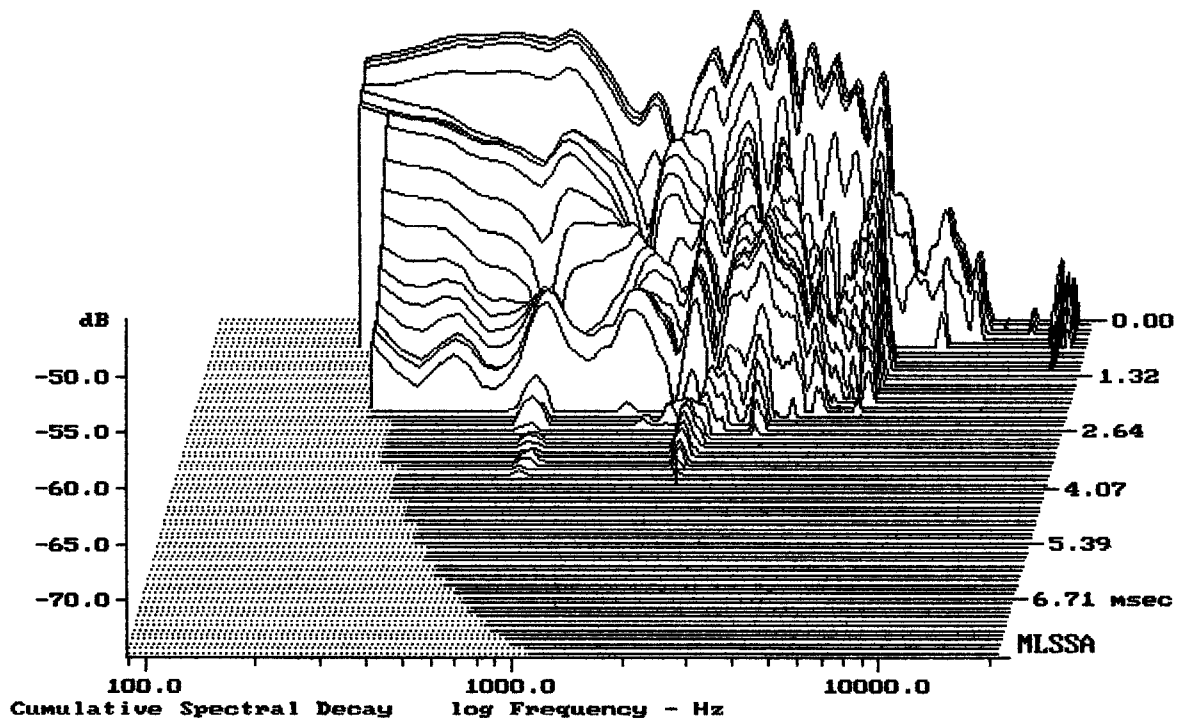

-74.46 dB, 2042 Hz (46), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	80.00	Hz
3	Re	4.10	Ohms[dc]
4	Res	30.17	Ohms
5	Qms	4.26	
6	Qes	0.58	
7	Qts	0.51	
8	L1	0.78	mH
9	L2	1.30	mH
10	R2	4.78	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	30.92	liters
13	Mms	44.95	grams
14	Cms	88	$\mu\text{M}/\text{Newton}$
15	B1	12.65	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (60.00 grams)

Area (Sd): 500.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.8% (-20% to -50% is recommended).

FANE DX12-4ohm

MLSSA: Parameters

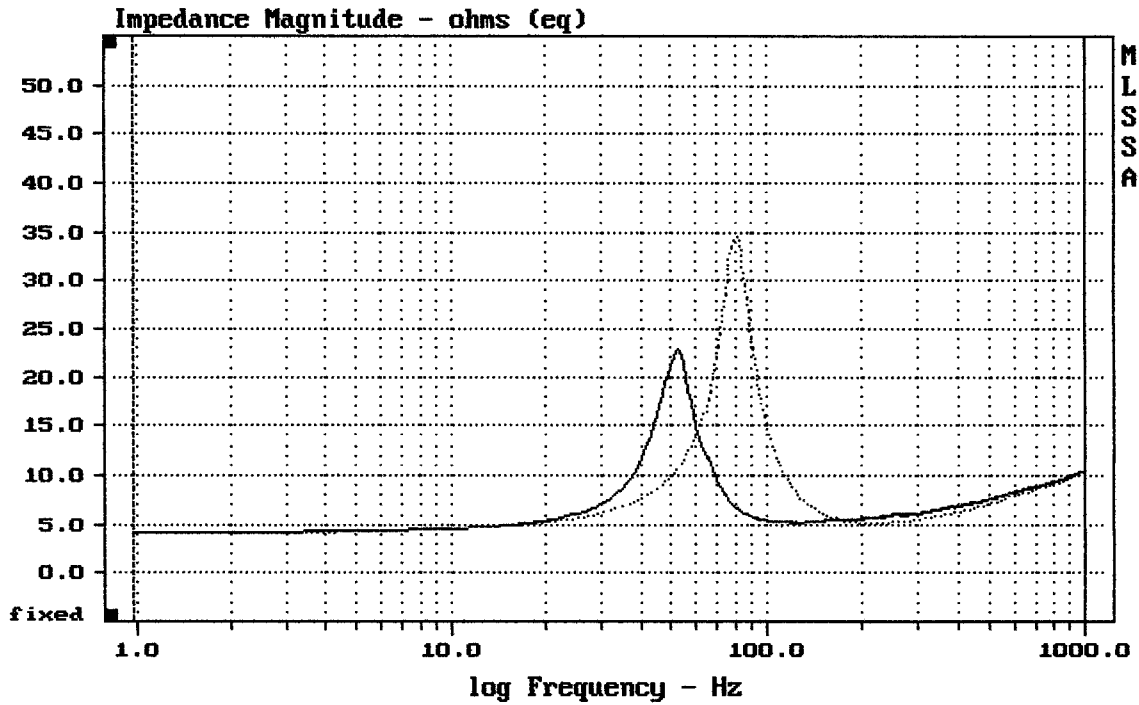

mean: 8.308, rms: 9.181, std: 3.908, max: 34.56, min: 4.176

MLSSA: Frequency Domain